




where inspiration flows
taps | showering | accessories

technical sheet
product code: CEL-148C/2/SQ-C/P



technical drawing:

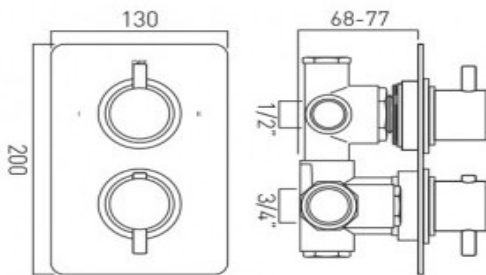

description: concealed 2 outlet, 2 handle thermostatic shower valve with integrated diverter
wall mounted
with rectangular backplate
thermostatic cartridge V-001C-PLA
diverter cartridge CEL-RETROFIT/DIV
2 x 3/4" female inlets
2 x 1/2" female outlets
includes fittings for 1/2" and 3/4" pipework
min-max wall mount 68-77mm (standard)
optimum installation depth 73mm (standard)
min-max wall mount 77-103mm (extension option)
optimum installation depth 90mm (extension option)

77-103mm extension option (both items needed)

1 x CEL-148/FLOW-EXT


1 x CEL-148/TEMP-C-EXT

finishes: chrome

guarantee: 12 year guarantee

minimum operating pressure: 1.5 bar MP

flow rate at 3.0 bar flow pressure: Outlet 1: 22, Outlet 2: 22 l/min

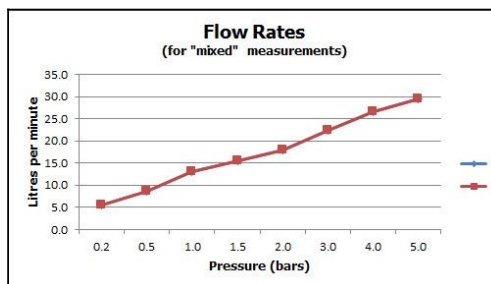

'mixed measurements' refers to equal hot and cold water supply
flow rate for unregulated flow unless flow regulator fitted as standard

certificates and awards:



cert no. 1410024 cert no. BC1467/0914

VADO wedmore road cheddar somerset england bs27 3eb
tel 01934 744466 fax 01934 744345 sales@vado-uk.com www.vado-uk.com