




where inspiration flows
taps | showering | accessories

technical sheet
product code: CEL-1720-12-C/P



technical drawing:

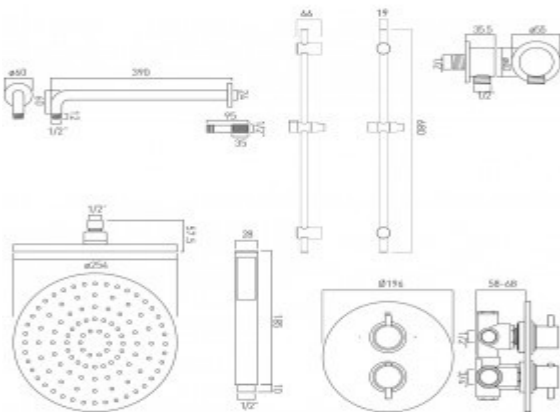

description: celsius concealed 2 outlet, 2 handle thermostatic shower valve with round backplate, saturn single function fixed disc head, venus single function slide rail kit and wall outlet

thermostatic cartridge V-001C-PLA
diverter cartridge CEL-RETROFIT/DIV

kit comprises:
WG-SATURN2/SA-C/P
WG-VENUSKIT-C/P
CEL-148C/2/RO-C/P
ELE-OUTLET-C/P

shower valve includes fittings for
1/2" and 3/4" pipework
min-max wall mount 58-68mm (standard)
optimum installation depth 63mm (standard)
min-max wall mount 68-96mm (extension option)
optimum installation depth 82mm (extension option)

68-96mm extension option (both items needed)
1 x CEL-148/2/3/FLOW-EXT
1 x CEL-148/TEMP-C-EXT

finishes: chrome

Eco recommended flow regulator product code: FR-SHOWER/9-C/P

guarantee: 12 year guarantee

minimum operating pressure: 1.5 bar MP

certificates and awards:



cert no. 1410024 cert no. BC1467/0914

VADO wedmore road cheddar somerset england bs27 3eb
tel 01934 744466 fax 01934 744345 sales@vado-uk.com www.vado-uk.com