




where inspiration flows
taps | showering | accessories

technical sheet
product code: ORI-148C-3/4-C/P



technical drawing:

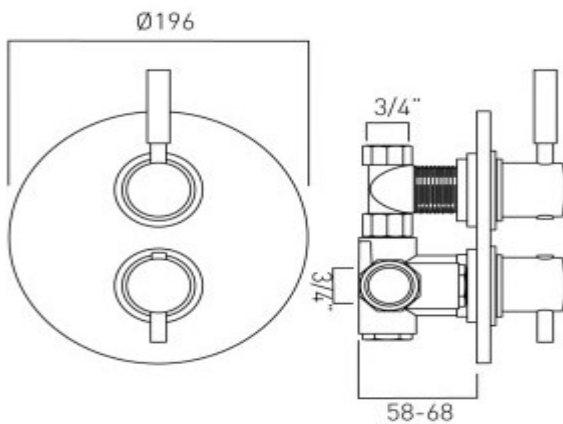

description: concealed 2 handle thermostatic shower valve
wall mounted
thermostatic cartridge V-001C-PLA
flow cartridge CEL-002A/B-3/4
2 x 3/4" female inlets
1 x 3/4" female outlet
includes fittings for 1/2" and 3/4" pipework
min-max wall mount 58-68mm (standard)
optimum installation depth 63mm (standard)
min-max wall mount 68-96mm (extension option)
optimum installation depth 82mm (extension option)
68-96mm extension option (both items needed)
1 x CEL-148/FLOW-EXT
1 x CEL-148/TEMP-C-EXT

finishes: chrome

guarantee: 12 year guarantee

minimum operating pressure: 0.2 bar LP

certificates and awards:



cert no. 1403011 cert no. BC1392/0514