

## Glastonbury

### Exposed Sequential Shower Valve with Top Outlet



### Product Specification

Product Codes & Finishes:	SGCT03 (Chrome) SGAT03 (Vintage Gold)
Connection Inlet:	15mm Compression
Maximum Temperature:	Pre-set 42oC
Pressure Range:	Min 0.1 Bar, Max 5.0 Bar
Inlet Centres:	Adjustable from 136mm – 158mm



### Additional Information

- 5 Year Guarantee
- Chrome plated to BS EN 248:2002
- Supplied with 2x 8 litres per minute flow regulators
- Adjustable inlet centres mean you can use existing pipework with centres measuring anything between 136mm and 158mm.
- Factory fitted regulators means this is a water saving shower
- Matching taps available

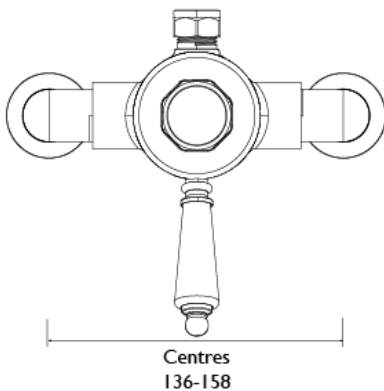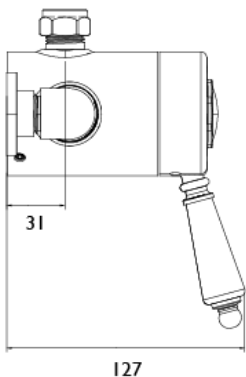

### Flow Rates (litres per minute)

System Pressure	0.1bar	0.2bar	0.5bar	1bar	2bar	3bar	5bar
With Flow Regulators	2.54	3.59	5.68	8.03	11.35	13.9	17.95
Without Flow Regulators	5.9	10.3	18	26.4	37.2	46.4	58.5

**Technical Advice:** For further information please call 0844 701 8503 or email [technical@heritagebathrooms.com](mailto:technical@heritagebathrooms.com).

**Guarantee:** 5 Year Guarantee covering manufacturing faults.

