




where inspiration flows
taps | showering | accessories

technical sheet
product code: WG-NOTBOX/2/A-C/P



technical drawing:

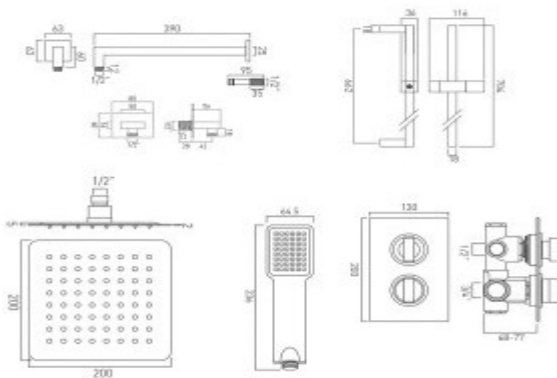

description: notion concealed 2 outlet, 2 handle thermostatic shower valve with rectangular backplate, aquablade easy clean single function square shower head 200mm x 200mm (8" x 8") and arm, single function low pressure slide rail shower kit and wall outlet

thermostatic cartridge V-001C-PLA diverter cartridge CEL-RETROFIT/DIV

kit comprises:
AQB-SQ/20/SA-C/P
WG-V2KIT-C/P
NOT-148C/2-C/P
INS-OUTLET-C/P

shower valve includes fittings for
1/2" and 3/4" pipework
min-max wall mount 68-77mm (standard)
optimum installation depth 73mm (standard)
min-max wall mount 77-103mm (extension option)
optimum installation depth 90mm (extension option)

77-103mm extension option (both items needed)
1 x NOT-148/2/3/FLOW-EXT
1 x NOT-148/TEMP-C-EXT

finishes: chrome

 recommended flow regulator product code: FR-SHOWER/9-C/P

guarantee: 12 year guarantee

minimum operating pressure: 1.5 bar MP

certificates and awards:



cert no. 1410024 cert no. BC1467/0914

VADO wedmore road cheddar somerset england bs27 3eb
tel 01934 744466 fax 01934 744345 sales@vado-uk.com www.vado-uk.com