




where inspiration flows
taps | showering | accessories

technical sheet
product code: WG-LIFBOX/4-C/P



technical drawing:

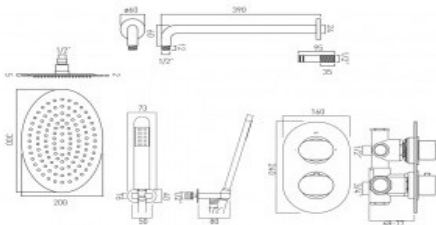

description: life concealed 2 outlet, 2 handle thermostatic shower valve with integrated diverter and oval backplate, aquablade easy clean single function oval shower head 200mm x 300mm (8" x 12") and shower arm, single function mini shower kit with integrated outlet and bracket

thermostatic cartridge V-001C-PLA
diverter cartridge CEL-RETROFIT/DIV

kit comprises:
AQB-OV/30/SA-C/P
LIF-SFMKWO-C/P
LIF-148C/2-C/P

shower valve includes fittings for
1/2" and 3/4" pipework
min-max wall mount 68-77mm (standard)
optimum installation depth 73mm (standard)
min-max wall mount 77-103mm (extension option)
optimum installation depth 90mm (extension option)

77-103mm extension option (both items needed)
1 x CEL-148/2/3/FLOW-EXT
1 x CEL-148/TEMP-C-EXT


finishes: chrome

recommended flow regulator product code: FR-SHOWER/9-C/P

guarantee: 12 year guarantee

minimum operating pressure: 1.5 bar MP

flow rate at 3.0 bar flow pressure: Handset: 16, Head: 10 l/min

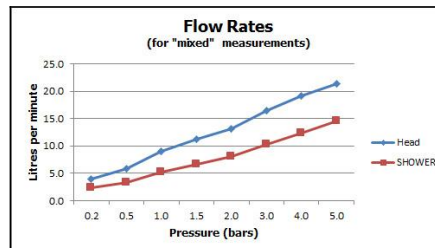

'mixed measurements' refers to equal hot and cold water supply flow rate for unregulated flow unless flow regulator fitted as standard

certificates and awards:



cert no. 1410024 cert no. BC1467/0914

VADO wedmore road cheddar somerset england bs27 3eb
tel 01934 744466 fax 01934 744345 sales@vado-uk.com www.vado-uk.com