




where inspiration flows
taps | showering | accessories

technical sheet
product code: MIX-1721-C/P



technical drawing:

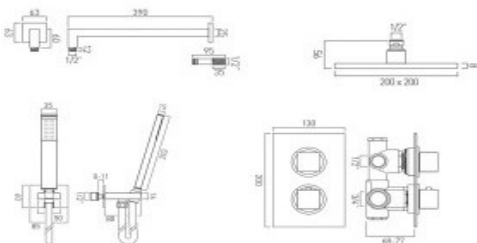

description: mix concealed 2 outlet, 2 handle thermostatic shower valve with integrated diverter and square backplate, atmosphere square shower head and shower arm, instinct single function shower kit with integral outlet and bracket.

kit comprises:
MIX-148C/2-C/P
ATM-HEAD/SQ/SA-C/P
INS-SFMKWO-C/P

shower valve includes fittings for
1/2" and 3/4" pipework
min-max wall mount 68-77mm (standard)
optimum installation depth 73mm (standard)
min-max wall mount 77-103mm (extension option)
optimum installation depth 90mm (extension option)


finishes: chrome

recommended flow regulator product code: FR-SHOWER/9-C/P

guarantee: 12 year guarantee

minimum operating pressure: 1.5 bar MP

flow rate at 3.0 bar flow pressure: Handset: 10, Head: 12 l/min

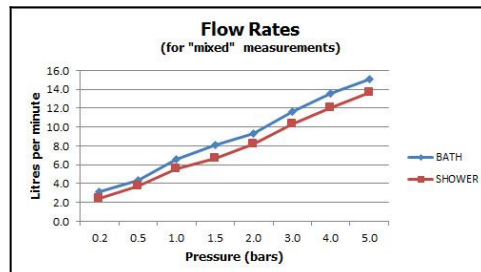

mixed measurements refers to equal hot and cold water supply flow rate for unregulated flow unless flow regulator fitted as standard

certificates and awards:



cert no. 1410024 cert no. BC1467/0914

VADO wedmore road cheddar somerset england bs27 3eb
tel 01934 744466 fax 01934 744345 sales@vado-uk.com www.vado-uk.com