


PURO/PURO STAR WITH SIDE OVERFLOW

- straightlined, purist design
- one-seater bath with side overflow
- classic four-cornered model
- made of KALDEWEI steel enamel
- model available with 2 standard tap holes without extra charge (180 mm centres)



Similar illustration

To order the bath with opposite overflow, please order model xxxx**2300**xxxx.

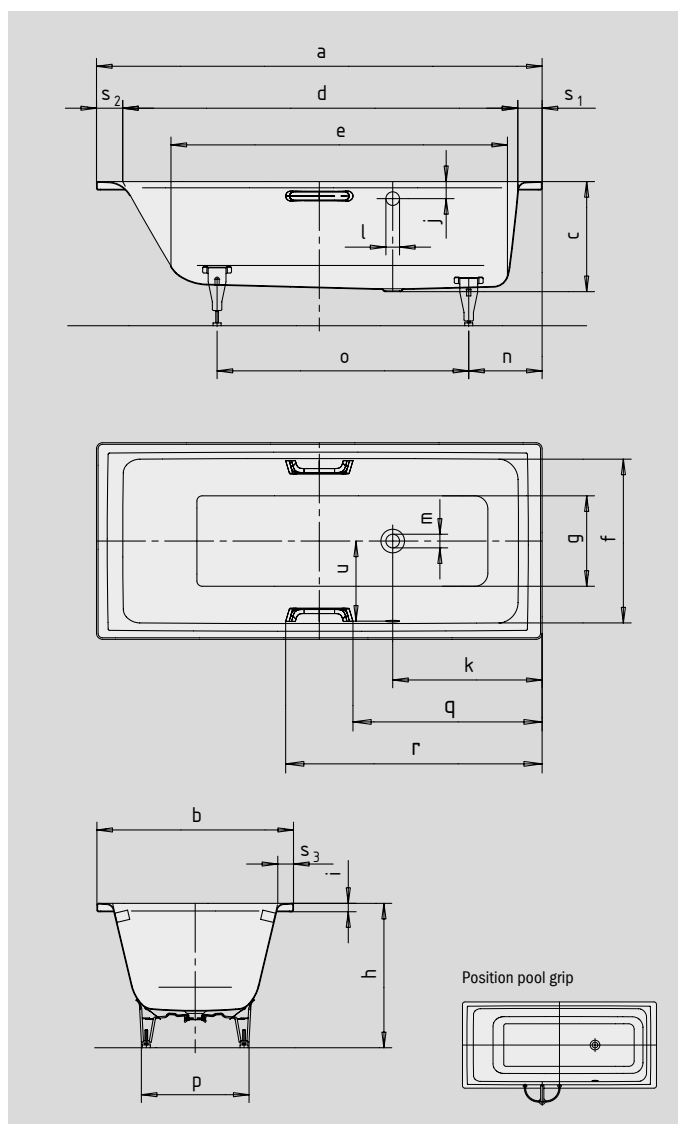

GRIP ELEGANT PURISM



SKIN TOUCH

SOUND WAVE

COMFORT SELECT

| Model No. | | 692 | 694 | 657 | 659 | 697 | 699 |
|-----------------------------------------------------------|--------------------------------------------------|-------------|-------------|-------------|-------------|-------------|----------------|
| External length | a | 1700 | 1700 | 1800 | 1800 | 1900 | 1900 mm |
| External width | b | 800 | 800 | 800 | 800 | 900 | 900 mm |
| Depth | c | 420 | 420 | 420 | 420 | 420 | 420 mm |
| Internal length (top) | d | 1510 | 1510 | 1610 | 1610 | 1710 | 1710 mm |
| Internal length (bottom) | e | 1280 | 1280 | 1380 | 1380 | 1480 | 1480 mm |
| Internal width (top) | f | 630 | 630 | 680 | 680 | 770 | 770 mm |
| Internal width (bottom) | g | 460 | 460 | 510 | 510 | 615 | 615 mm |
| Height with feet | h | 555-565 | 555-565 | 551-571 | 551-571 | 547-560 | 547-560 mm |
| Height of rim | i | 32 | 32 | 32 | 32 | 32 | 32 mm |
| Distance top edge to centre of overflow hole | j | 70 | 70 | 70 | 70 | 70 | 70 mm |
| Distance bath edge (foot) to centre of drain hole | k | 570 | 570 | 570 | 570 | 570 | 570 mm |
| Diameter of overflow hole | l | 52 | 52 | 52 | 52 | 52 | 52 mm |
| Diameter of drain hole | m | 52 | 52 | 52 | 52 | 52 | 52 mm |
| Distance foot end of bath edge to centre of foot | n | 445 | 445 | 460 | 460 | 395 | 395 mm |
| Distance between the feet | o | 750 | 750 | 820 | 820 | 945 | 945 mm |
| Max. width of feet | p | 480 | 480 | 485 | 485 | 625 | 625 mm |
| Distance bath edge (foot end) to where grip/handle starts | q | - | 721,5 | - | 771,5 | - | 821,5 mm |
| Distance bath edge (foot end) to where grip/handle ends | r | - | 978,5 | - | 1028,5 | - | 1078,5 mm |
| Width of rim (foot end; head end; lengthwise) | s ₁ ; s ₂ ; s ₃ | 90; 100; 85 | 90; 100; 85 | 90; 100; 60 | 90; 100; 60 | 90; 100; 65 | 90; 100; 65 mm |
| Distance between centre holes | u | 300 | 300 | 325 | 325 | 375 | 375 mm |
| Water volume** in litres | | 140 | 140 | 170 | 170 | 230 | 230 |
| Weight of the enamelled bath in kg | | 53 | 53 | 55 | 55 | 64 | 64 |
| Anti-slip | | 348 x 348 | 348 x 348 | 396 x 396 | 396 x 396 | 396 x 396 | 396 x 396 mm |
| Full anti-slip | | 924 x 348 | 924 x 348 | 1165 x 396 | 1165 x 396 | 1260 x 396 | 1260 x 396 mm |

Subject to technical alterations, tolerances and errors. Similar illustration.
** 70 litres displacement on average.

KALDEWEI