

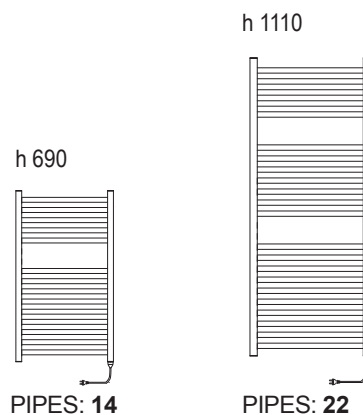


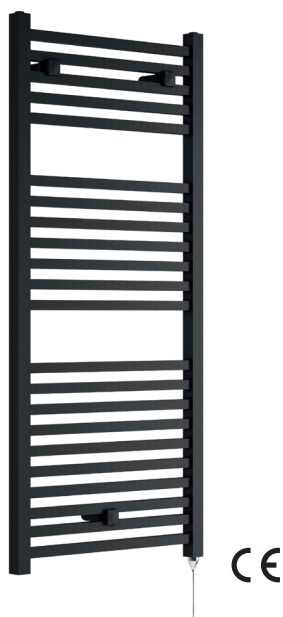

	straight
Material	carbon steel
Pipes - mm	20x20x1
Collectors - mm	30x30x1,5
Wall fixings	3
Max temperature	90 °C
Paint	epoxypolyester powder
Packaging	styrofoam protections + carton box
Protection rate	IP64
Electrical insulation	Class 1
Heating element protection systems	Overtemperature (cut/out) / Thermalfuse
Wire	Wire with schuko plug; approximate lenght 1m

Standard equipment: 1 kit wall fixing brackets

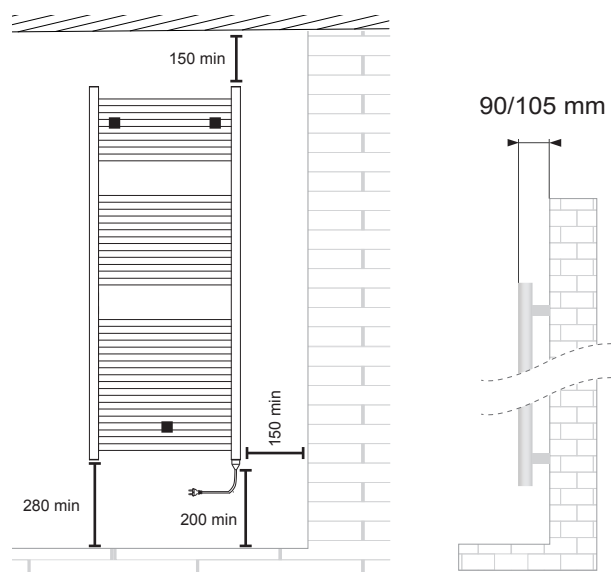

Anthracite - straight

code	height mm	width mm	weight kg	heating element watt	heating element kcal/h	heating element btu	overttemperature cut/out °C	thermalfuse °C
388138	690	500	8,8	300	258	1024	90	152
388139	1110	500	13,5	500	430	1706	90	152

Chrome - straight

code	height mm	width mm	weight kg	heating element watt	heating element kcal/h	heating element btu	overttemperature cut/out °C	thermalfuse °C
388136	690	500	8,8	200	172	683	80	152
388137	1110	500	13,5	300	258	1024	90	152