### SPECIFICATION SHEET

**COLLECTION: CELSIUS** 

PRODUCT CODE: CEL-1701-1/2-ORA-CP



### **DESCRIPTION:**

#### Celsius

- exposed round thermostatic 1/2" shower valve
- Ora 3 function slide rail shower kit
- easy-fi t wall mounting brackets thermostatic cartridge V-704-34S flow cartridge C-202-RTC

minimum operating pressure 1.0 bar MP kit comprises:

ORA-MFSRK/RO-CP CEL-149-1/2-C/P WG-049BRACK+SHR-C/P

### FINISH:

Chrome

### MINIMUM OPERATING PRESSURE:

1.0 bar MP



### **SPECIFICATION** SHEET

**COLLECTION: CELSIUS** 

PRODUCT CODE: CEL-149-1/2-C/P



### **DESCRIPTION:**

exposed thermostatic shower valve, 1/2" wall mounted thermostatic cartridge V-001C-PLA flow cartridge CEL-002B-1/2 3/4" x 1/2" x 50mm male eccentrics minimum operating pressure 0.2 bar LP

### FINISH:

### FLOW REGULATOR:

FR-SHOWER/9-C/P

### **MINIMUM OPERATING PRESSURE:**

0.2 bar LP

#### FLOW RATE AT 3.0 BAR FLOW PRESSURE:

21 l/min






# TECHNICAL DRAWING

**COLLECTION:** CELSIUS

PRODUCT CODE: CEL-149-1/2-C/P

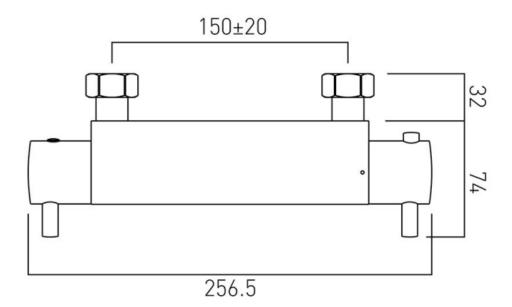

## SPECIFICATION

**COLLECTION: ORA** 

PRODUCT CODE: ORA-MFSRK/RO-CP




### **DESCRIPTION:**

slide rail shower kit with round 3 function push-button control handset rub-clean nozzles 546mm slide rail with twist control 680mm overall rail length with 150cm shower hose and hose retainer minimum operating pressure 1.0 bar MP

### FINISH:

### MINIMUM OPERATING PRESSURE:






# TECHNICAL DRAWING

**COLLECTION:** ORA

PRODUCT CODE: ORA-MFSRK/RO-CP

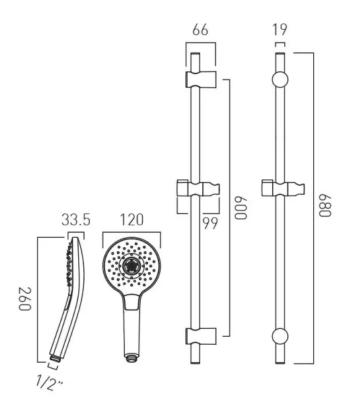

## SPECIFICATION SHEET

**COLLECTION:** 

PRODUCT CODE: WG-049BRACK+SHR-C/P



### **DESCRIPTION:**

pair of easy-fix shower brackets with shrouds wall mounted 15mm compression connection

### FINISH:

Chrome


MINIMUM OPERATING PRESSURE:



### TECHNICAL DRAWING

**COLLECTION:** 

PRODUCT CODE: WG-049BRACK+SHR-C/P

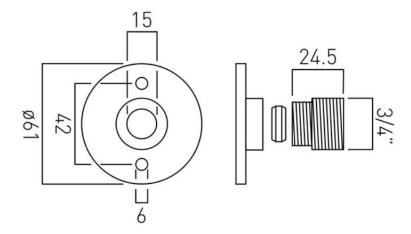

tel: 01934 744466 email: sales@vado.com www.vado.com

where inspiration flows taps | showering | accessories

