



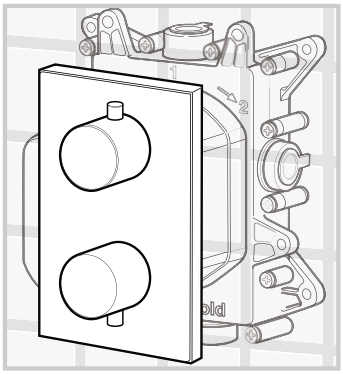
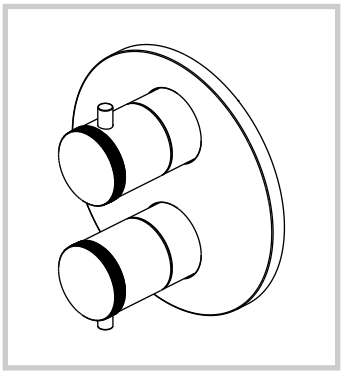
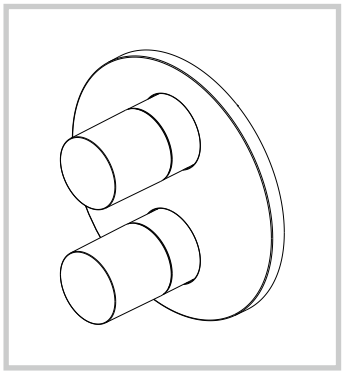
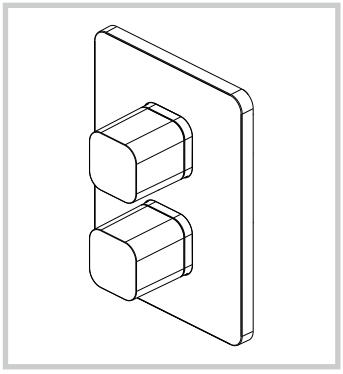
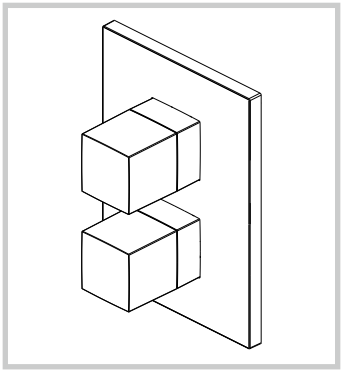


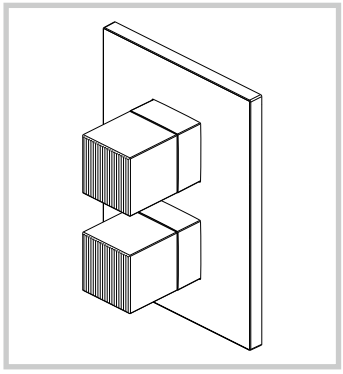

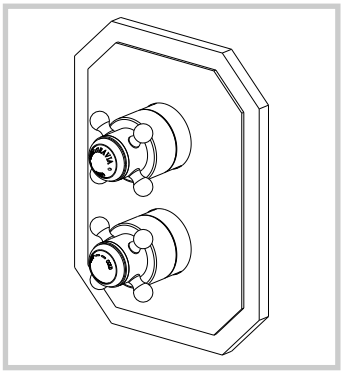

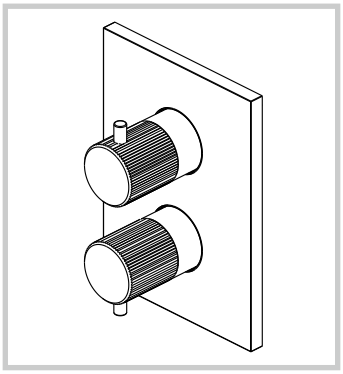

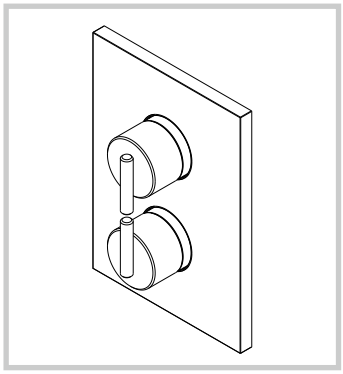

COMPLETION CONCEALED BOX

MOUNTING INSTRUCTIONS

1 TECHNICAL FEATURES

Pressure range min/max 0,5/5 bar
(in case of water pressure highter than 5 bar weeracommend installing pressure reducers).
Recommended pressure 3 bar.





Operation:
Either with gas or electric accumulation boilers.
Centralised systems.




Safety lock at:	41° C
Min. Working temperature:	3° C
Min. recommended:	15° C
Max. Working temperature:	70° C
Max. recommended:	65° C
Recommended thermal differential	50° C

Thermal disinfection is allowed.


Safety system with flow stop in case of lack of one of the two waters.


Warning: contact the plumber for the choice of the best water heating device.


Press.	FLOW RATE (L/min)			
	Term. 1 way	Term. 2 way		
				
bar	Exit 1/2/3	Exit 2	Exit 3	Mix
0,5	8,2	8,2	8,2	9,2
1	11,7	11,7	11,7	13,2
2	16,7	16,4	16,4	18,7
3	20,7	20	20	22,9
4	24	23	23	26,4
5	26,6	25,8	25,8	29,5


Press.	FLOW RATE (L/min)		
	Term. 3 ways		
			
bar	Exit 1	Exit 2	Exit 3
0,5	9,4	8,1	8,1
1	13,4	11,6	11,6
2	19,2	16,6	16,6
3	23,7	20,5	20,5
4	27,4	23,8	23,8
5	30,5	26,6	26,6

4 PRE-INSTALLATION INFORMATIONS

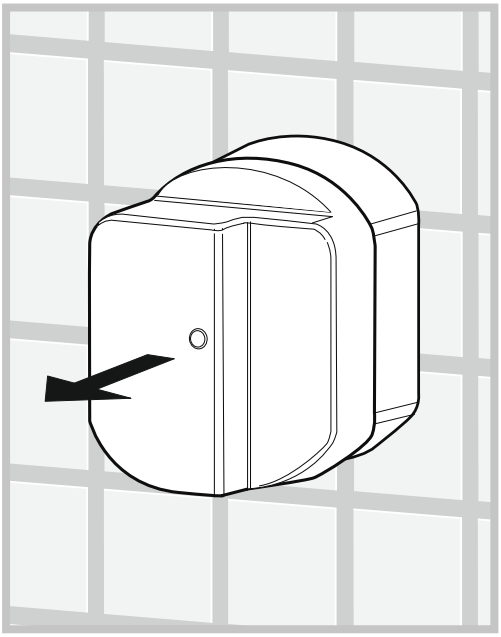


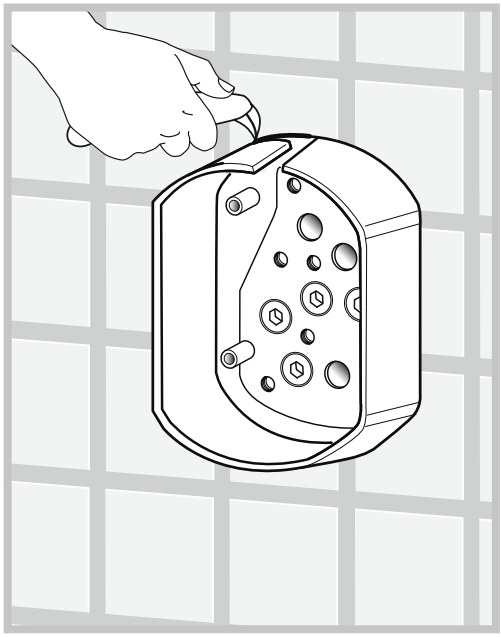


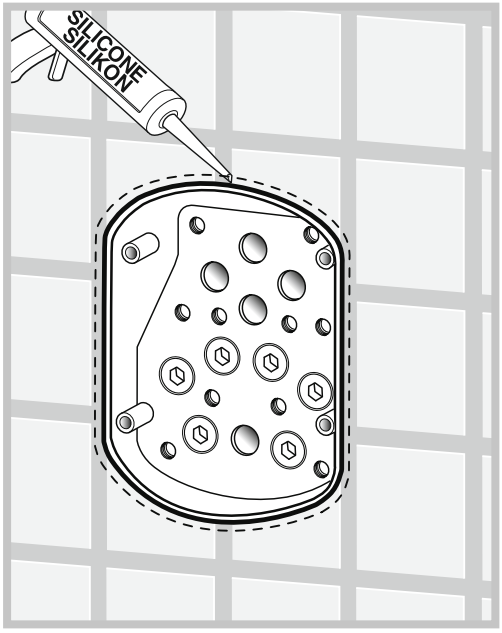

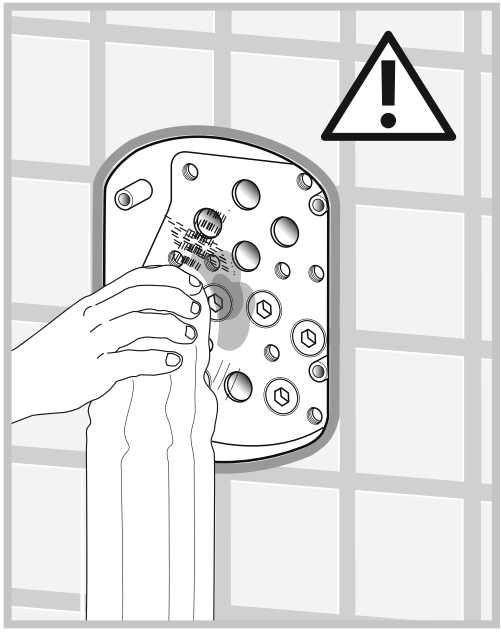


5 PACKAGE CONTENT - THERMOSTATIC 1-2-3 WAYS




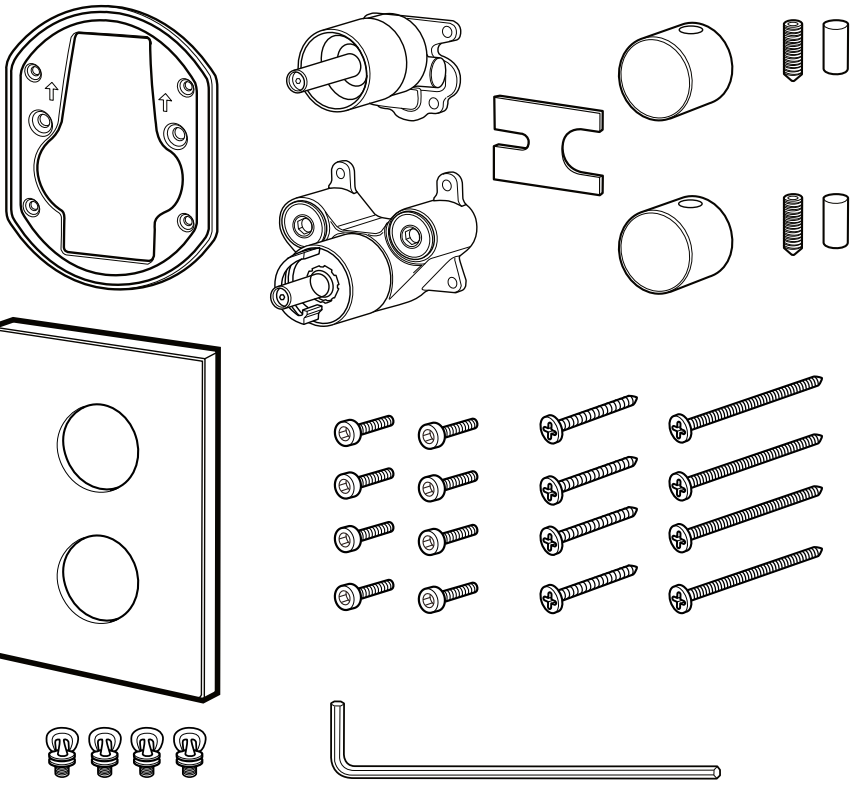

GB Mounting Instructions


6 PACKAGE CONTENT - THERMOSTATIC 1-2-3 WAYS




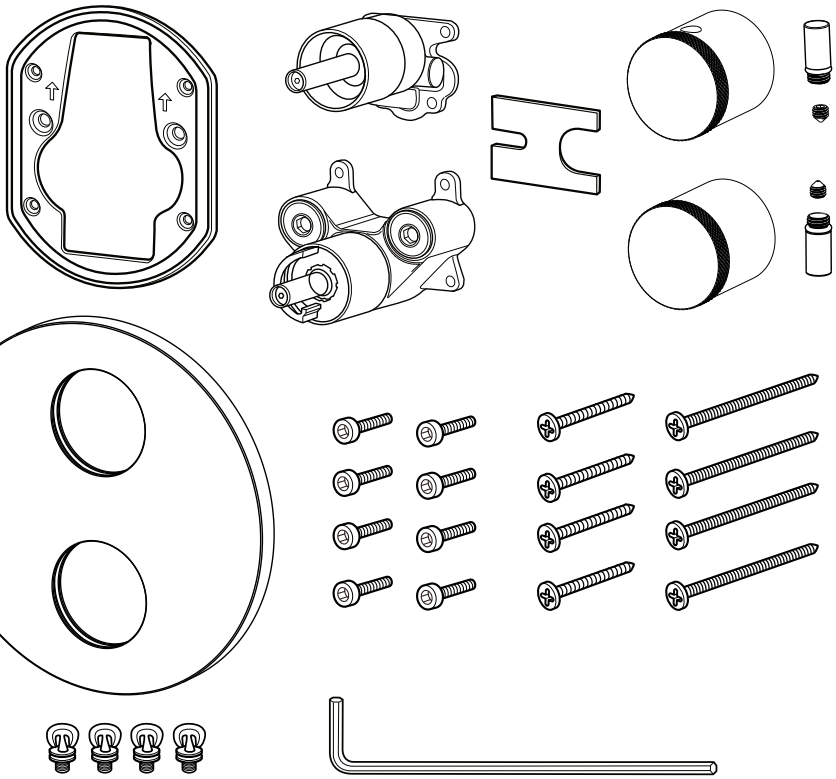

GB Mounting Instructions


7 PACKAGE CONTENT - THERMOSTATIC 1-2-3 WAYS

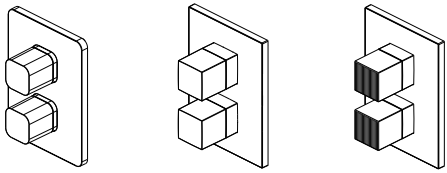


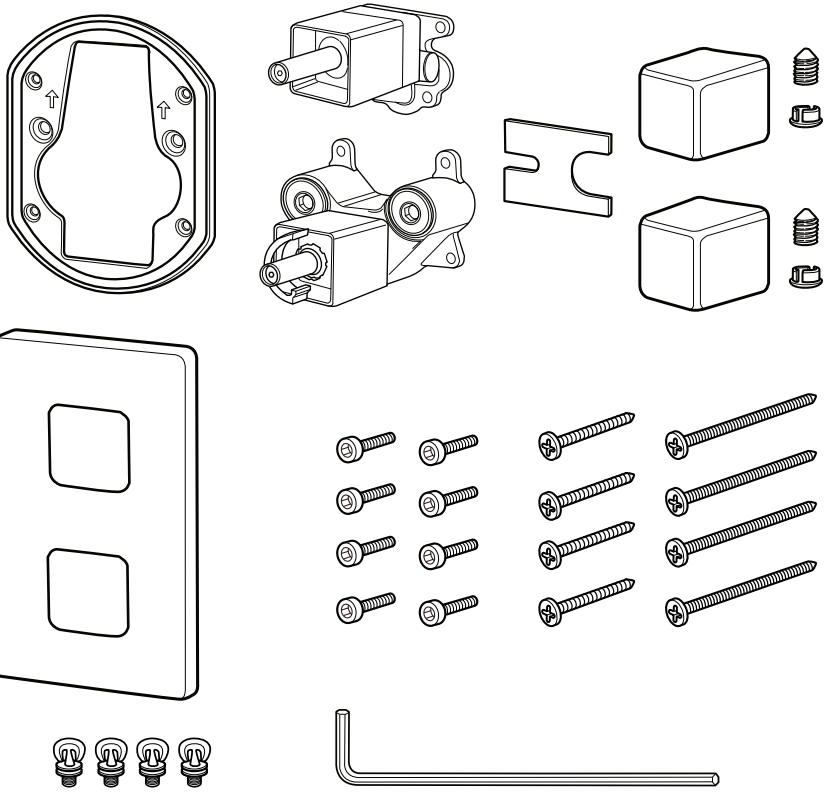

GB Mounting Instructions


8 PACKAGE CONTENT - THERMOSTATIC 1-2-3 WAYS




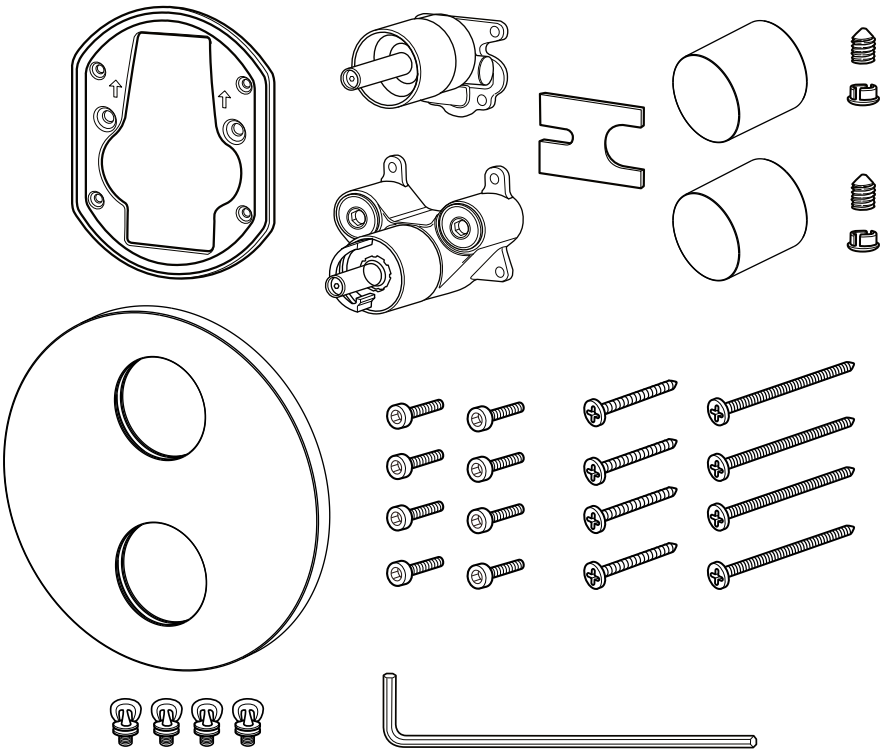

GB Mounting Instructions


9 PACKAGE CONTENT - THERMOSTATIC 1-2-3 WAYS




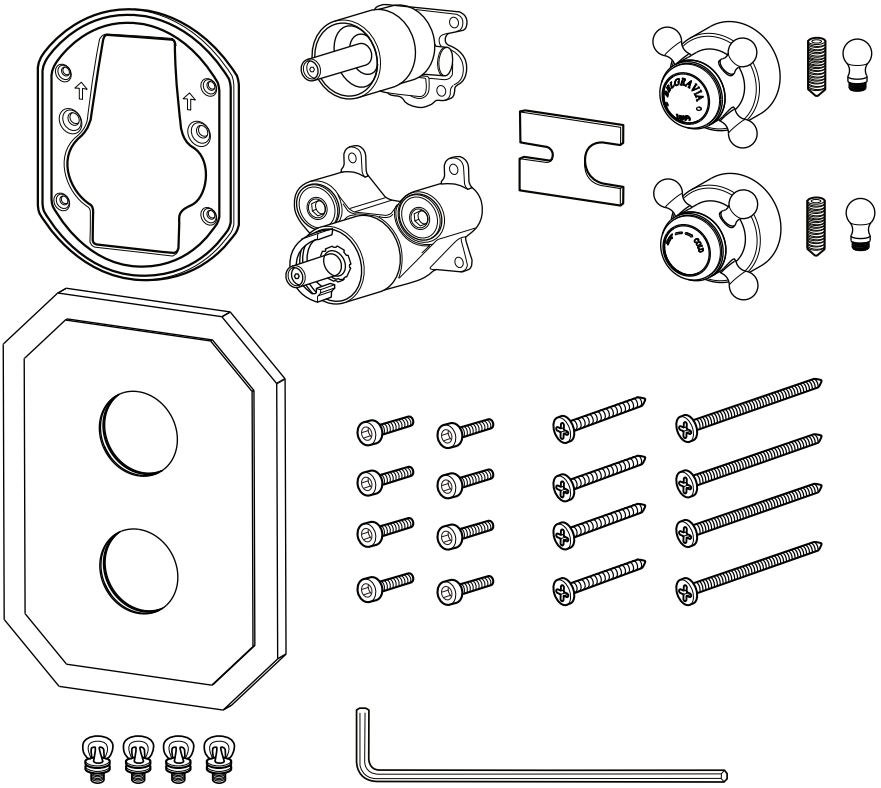

GB Mounting Instructions


10 PACKAGE CONTENT - THERMOSTATIC 1-2-3 WAYS




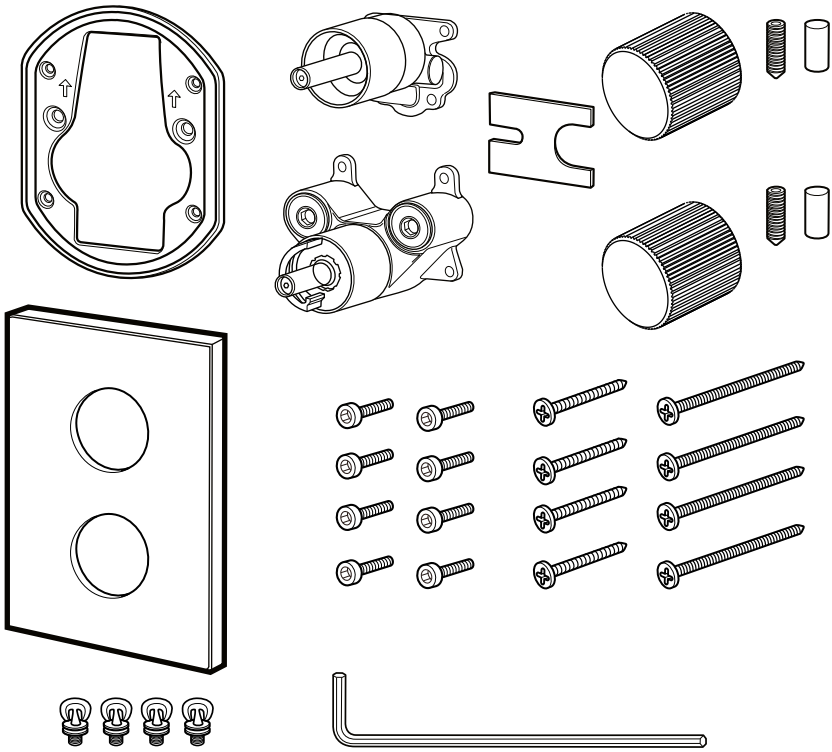

GB Mounting Instructions


11 PACKAGE CONTENT - THERMOSTATIC 1-2-3 WAYS



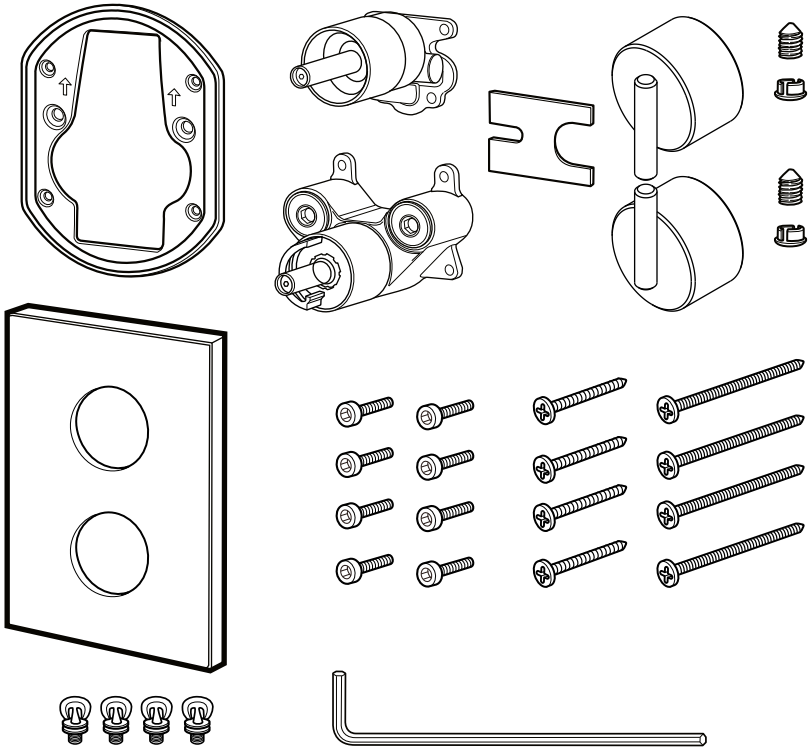


GB Mounting Instructions


1

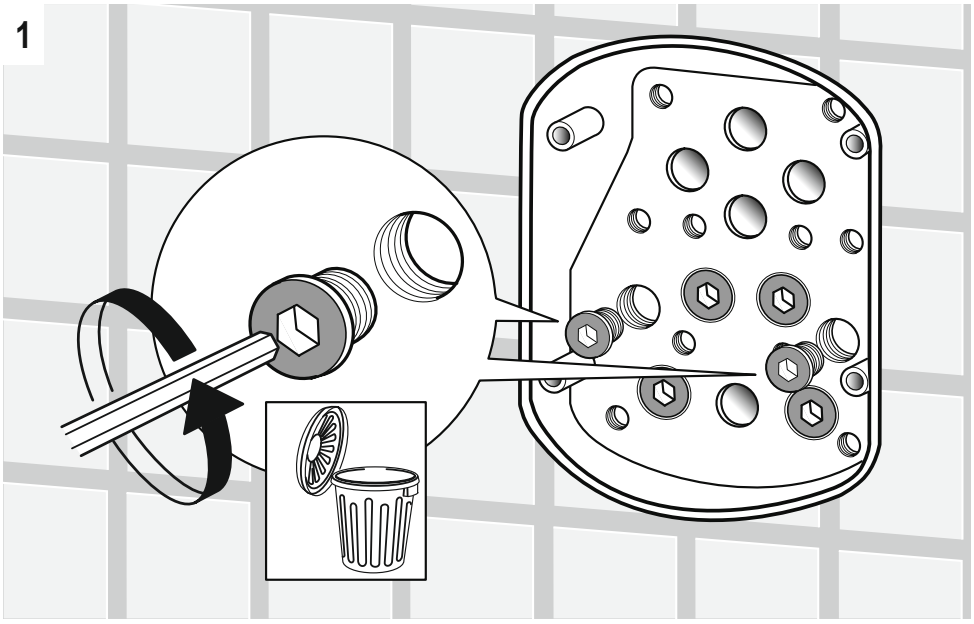


2

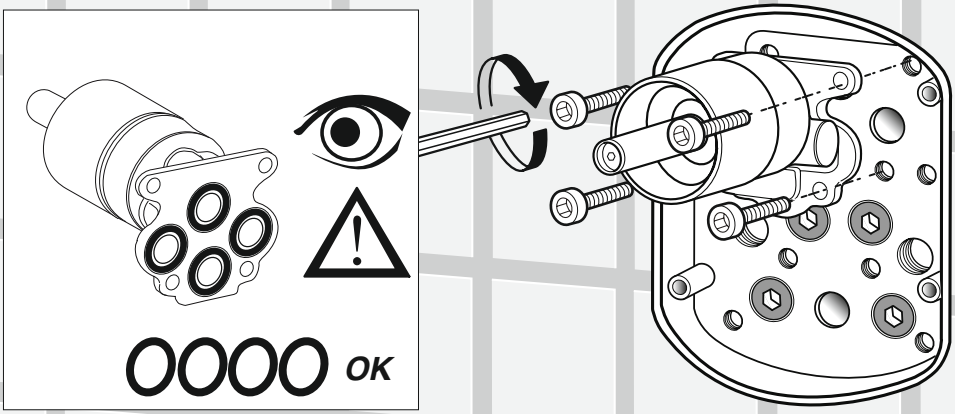



3

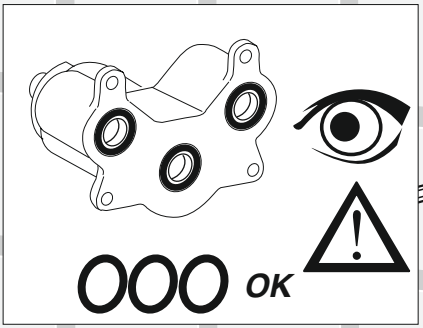


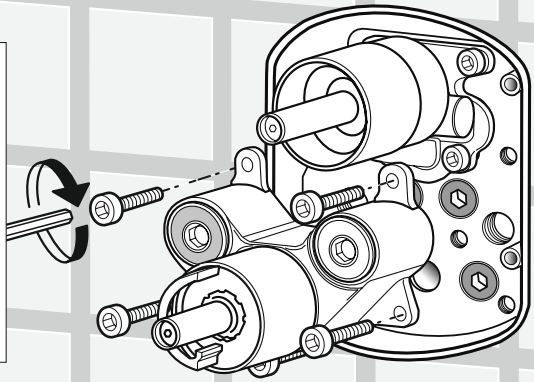



4

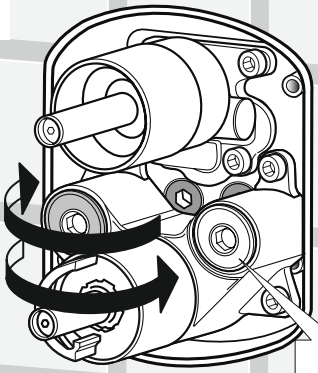











INSTALLATION



5

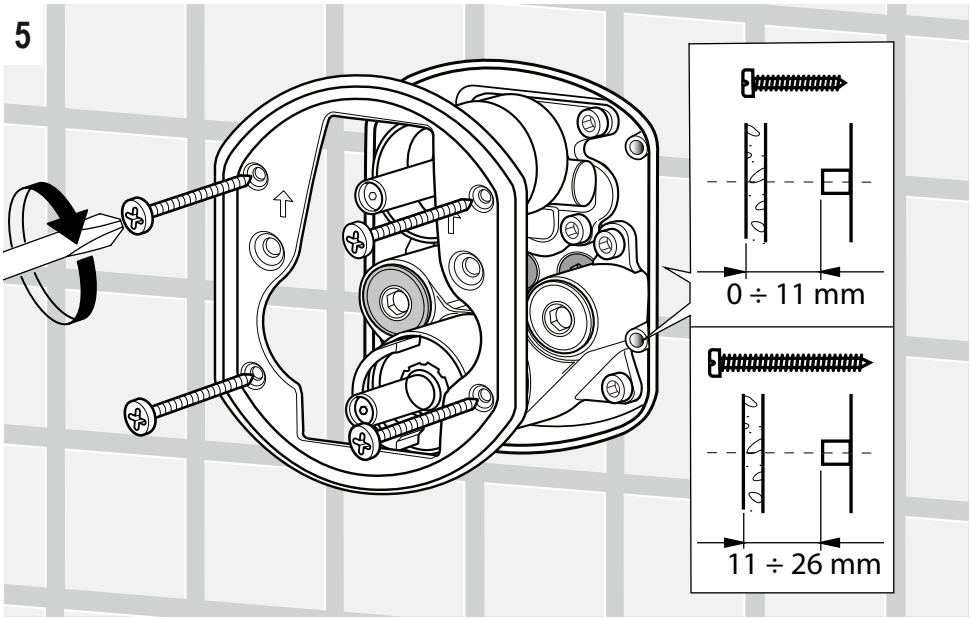



6A

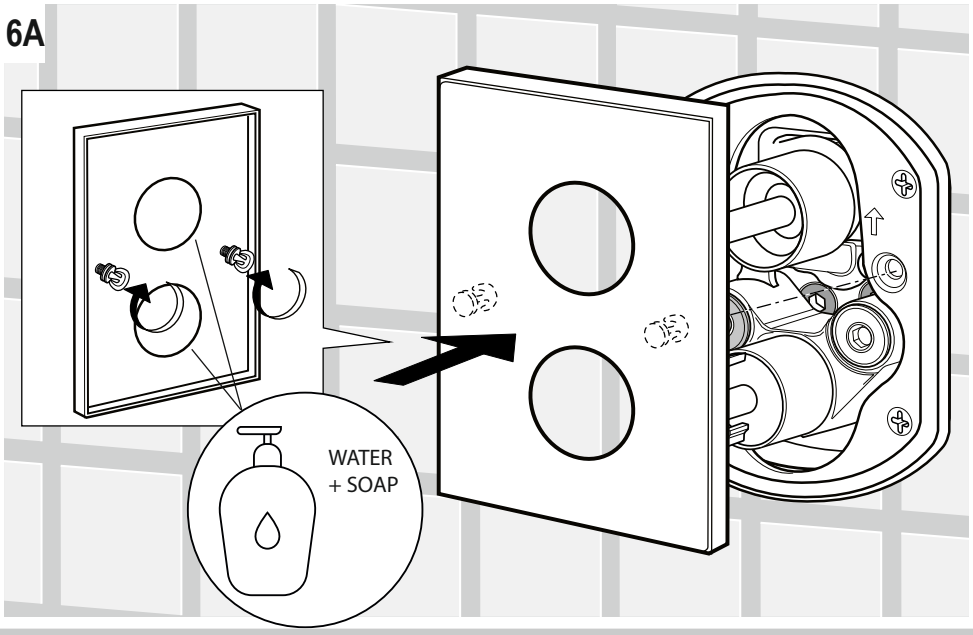

INSTALLATION




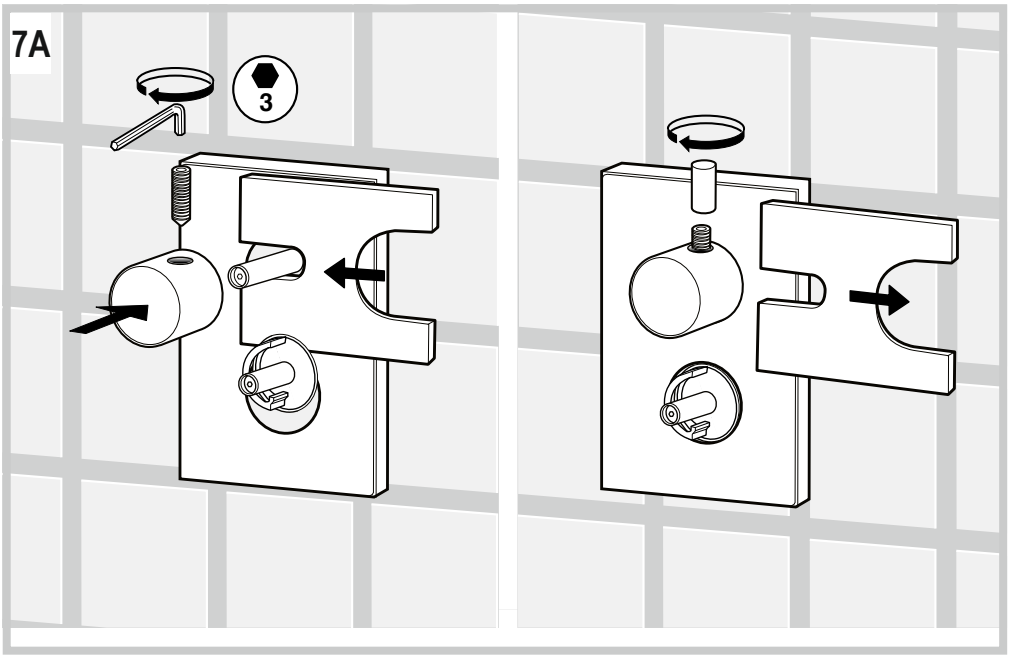

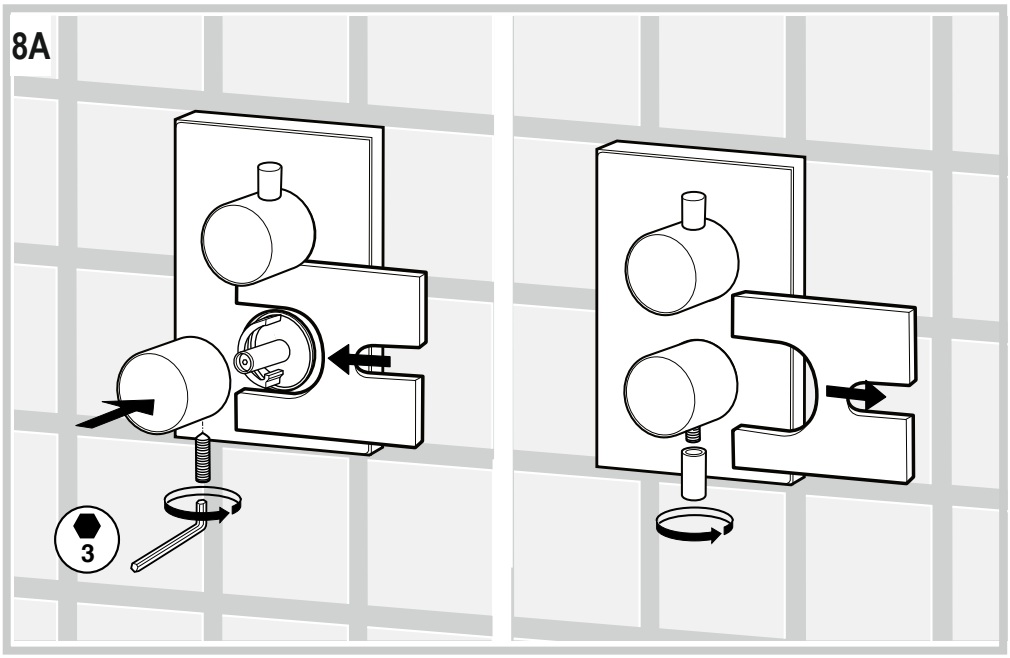


INSTALLATION

5

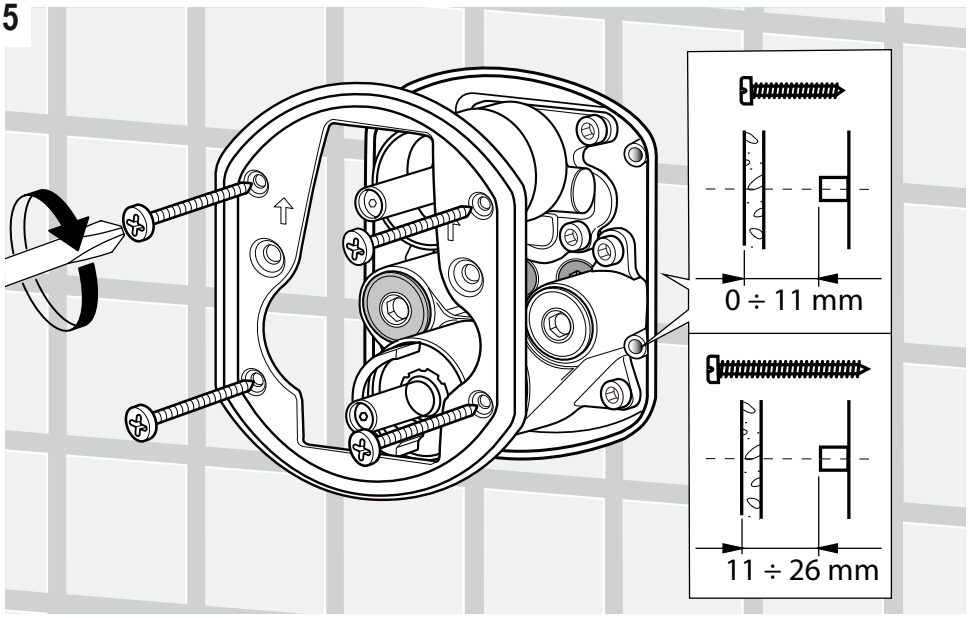


6B

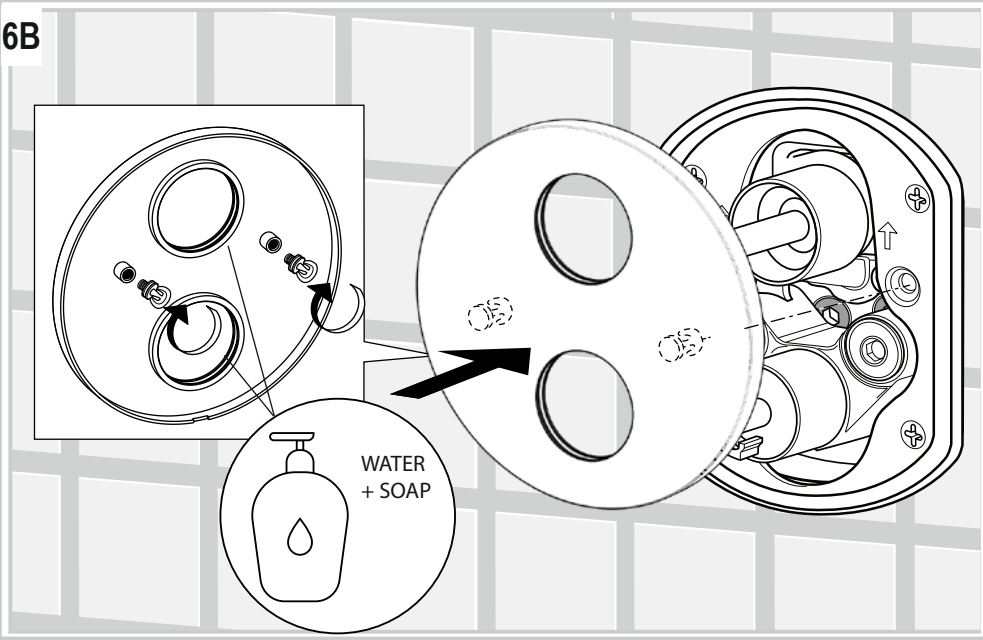


INSTALLATION

7B

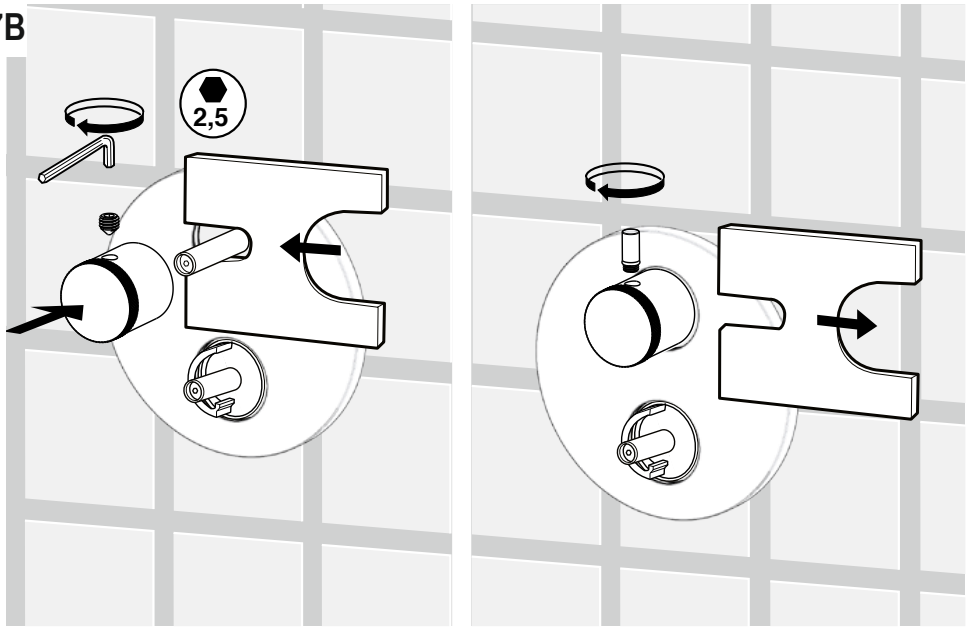


8B

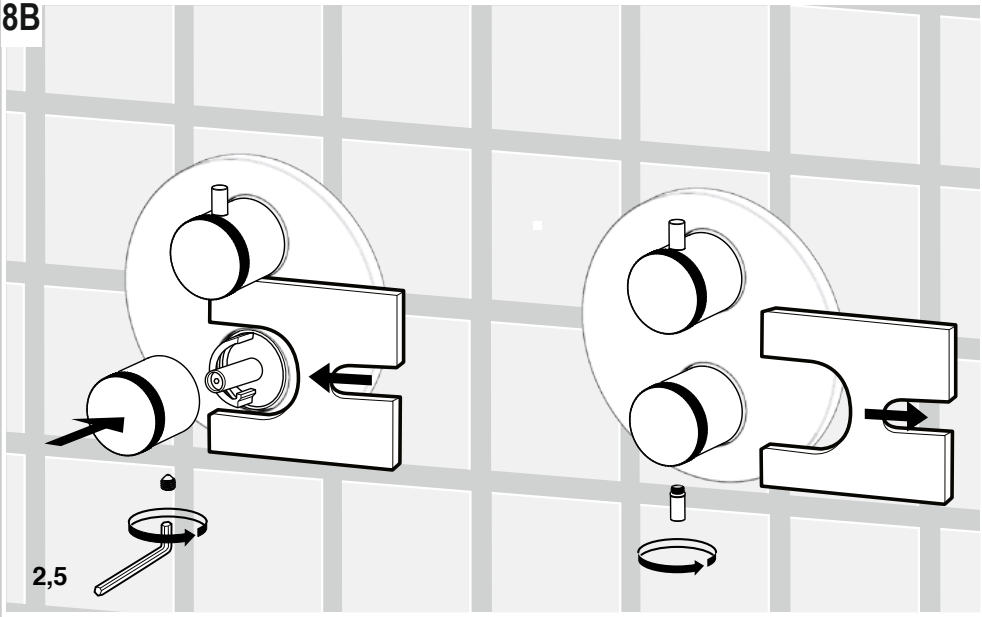


INSTALLATION

5

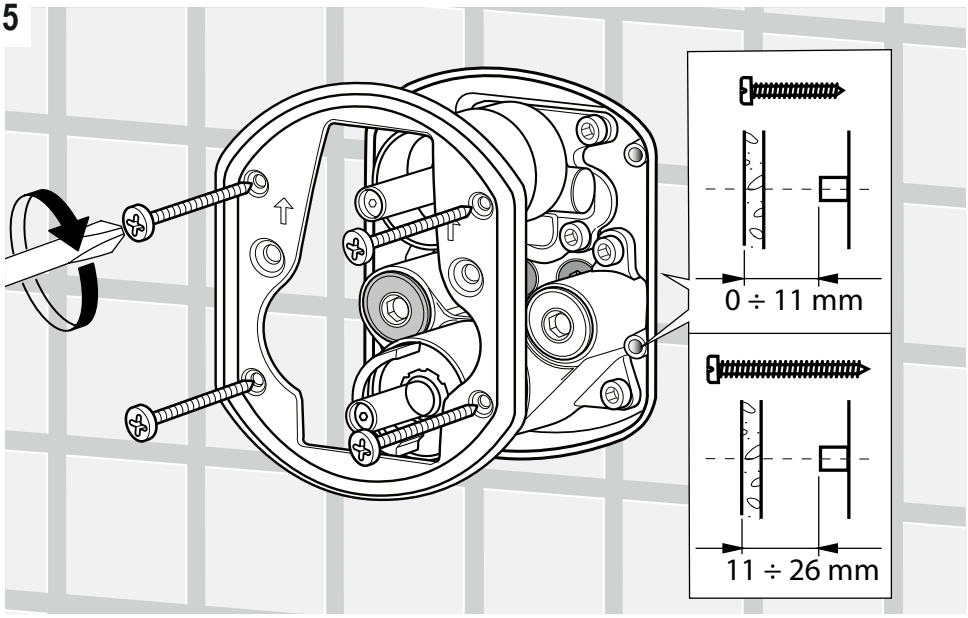



6C

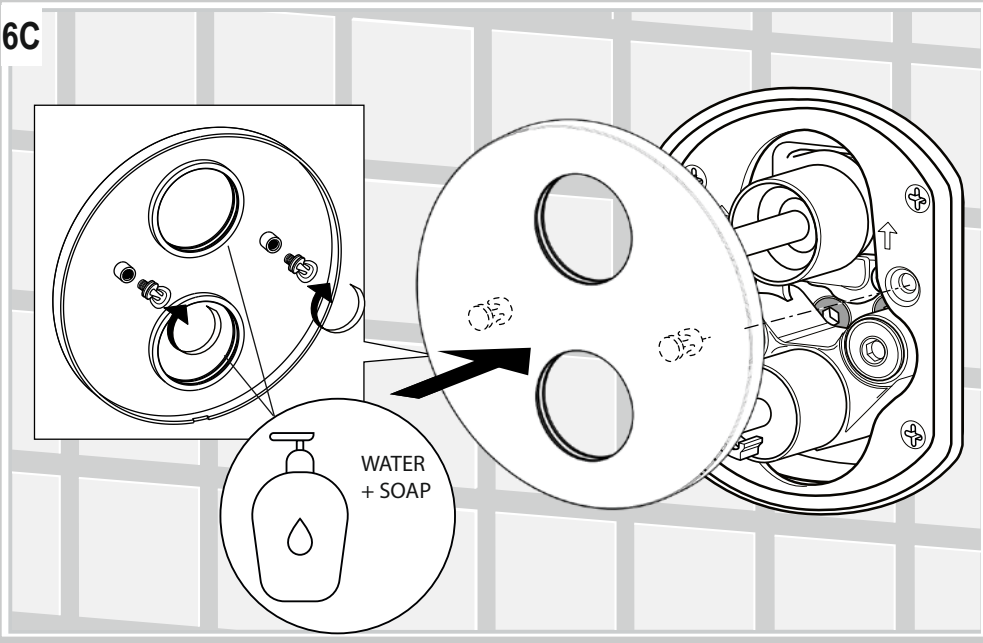


INSTALLATION



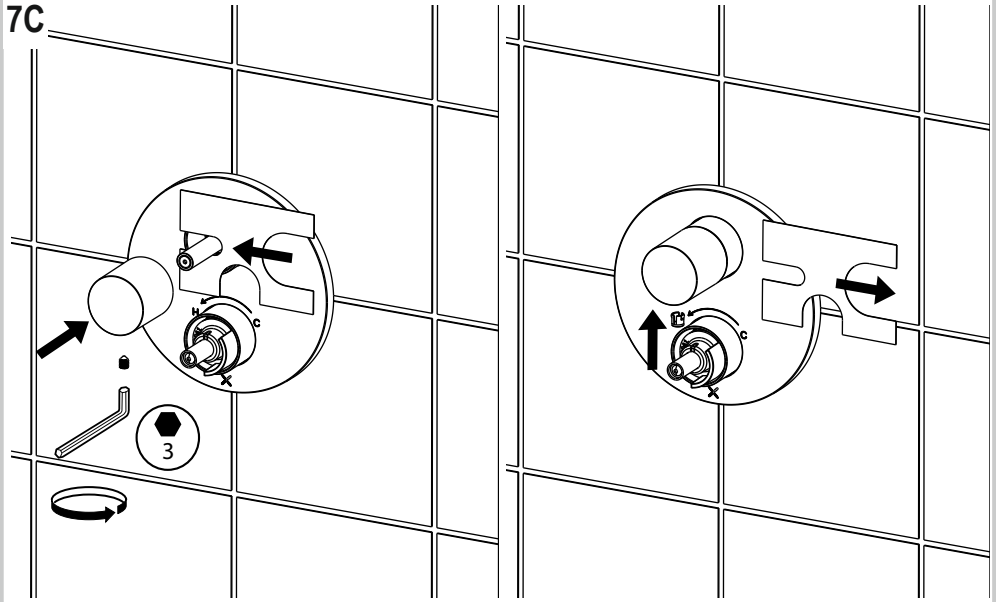


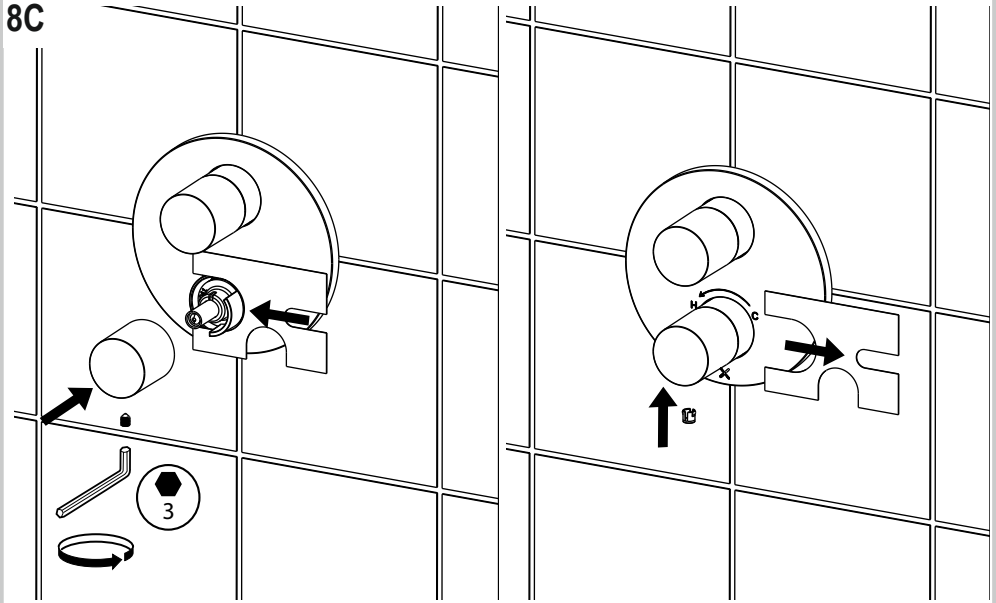


5

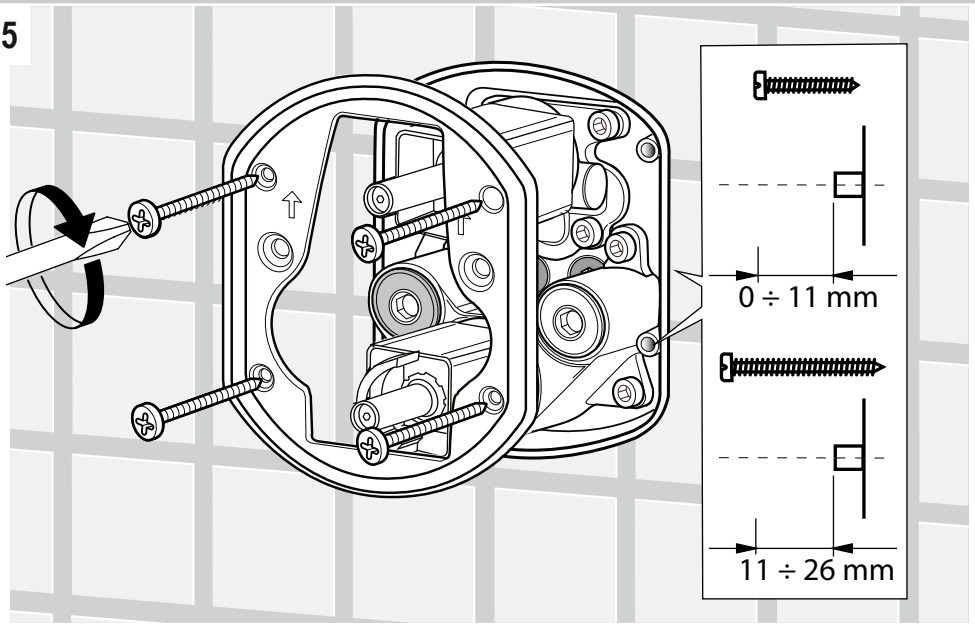


6D

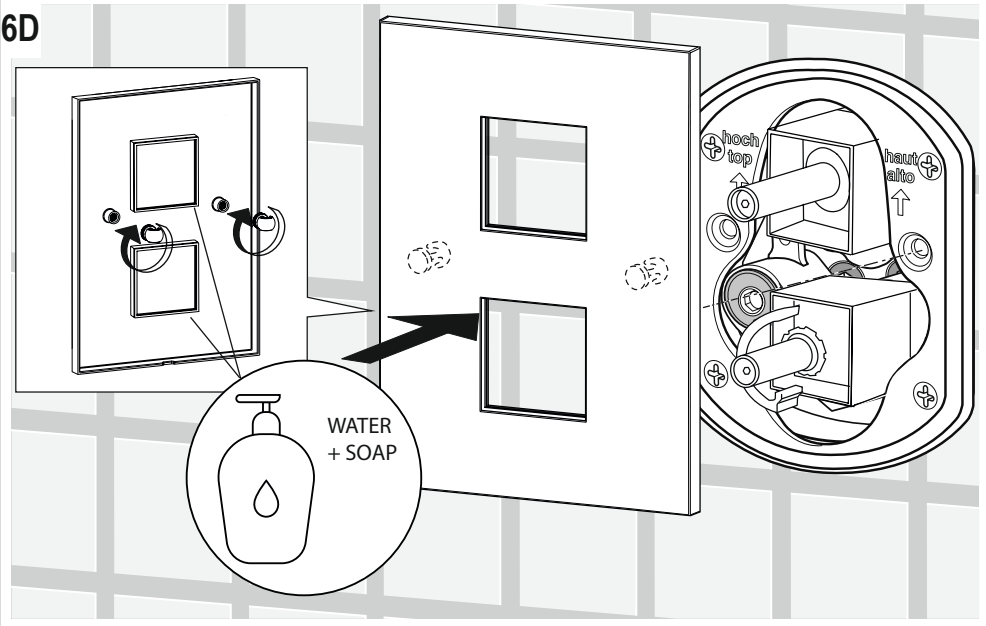


INSTALLATION



7D

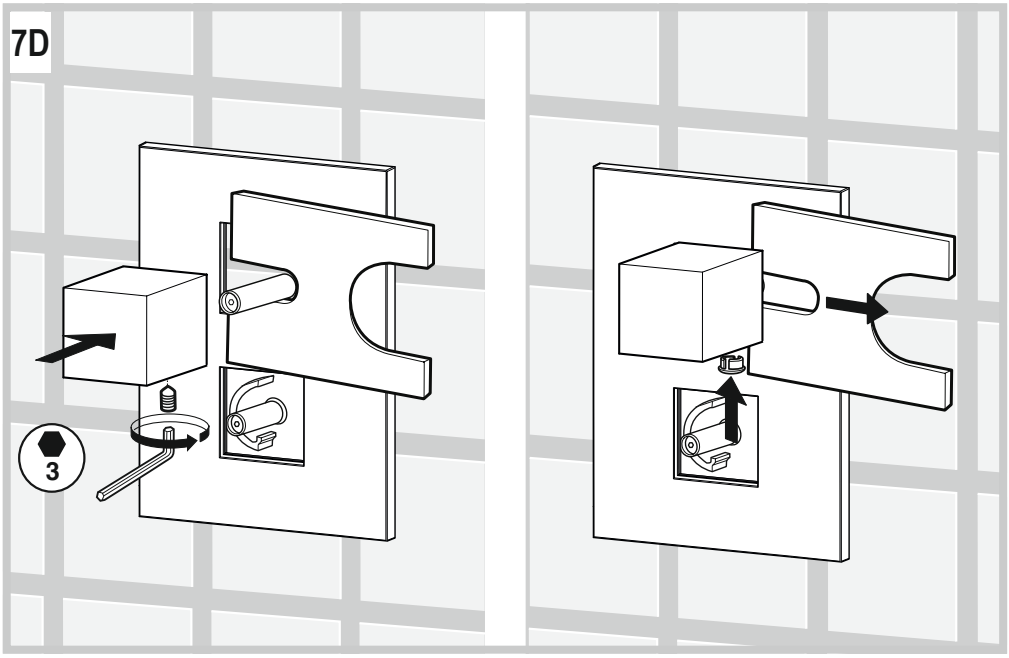


8D

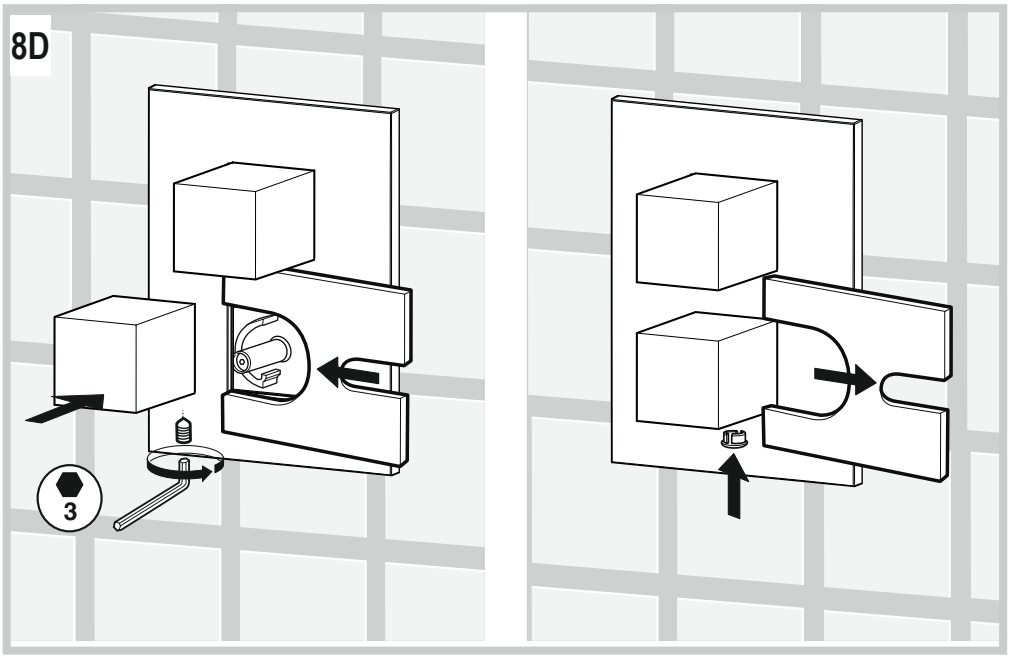




5

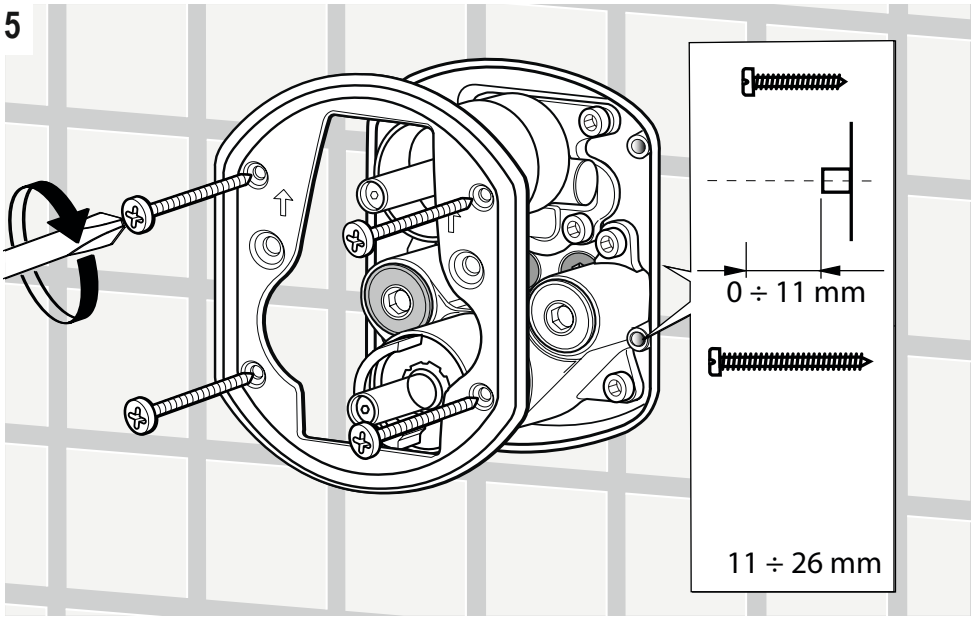


6E

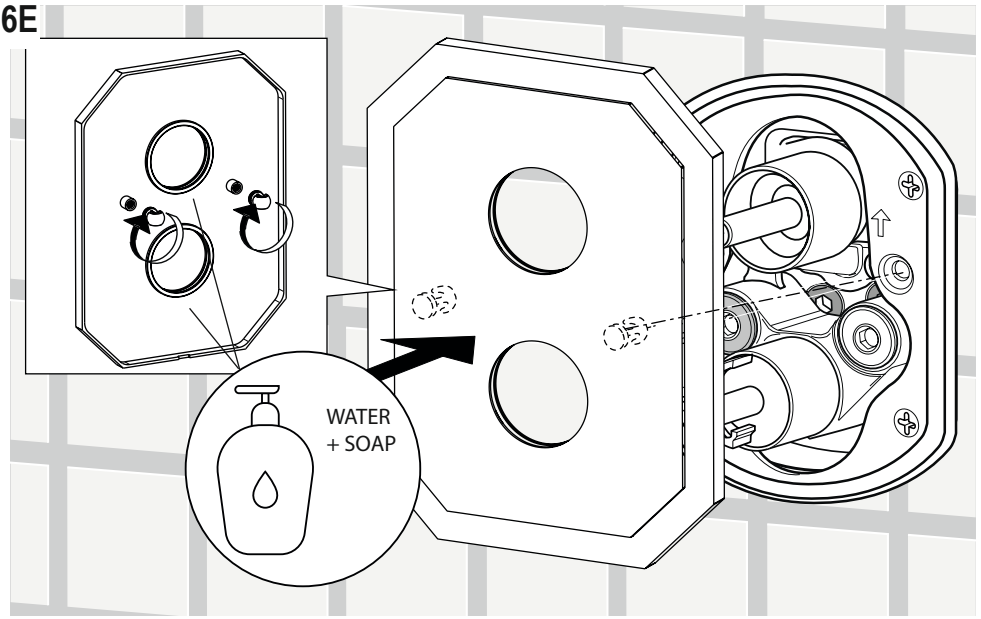


INSTALLATION




7E

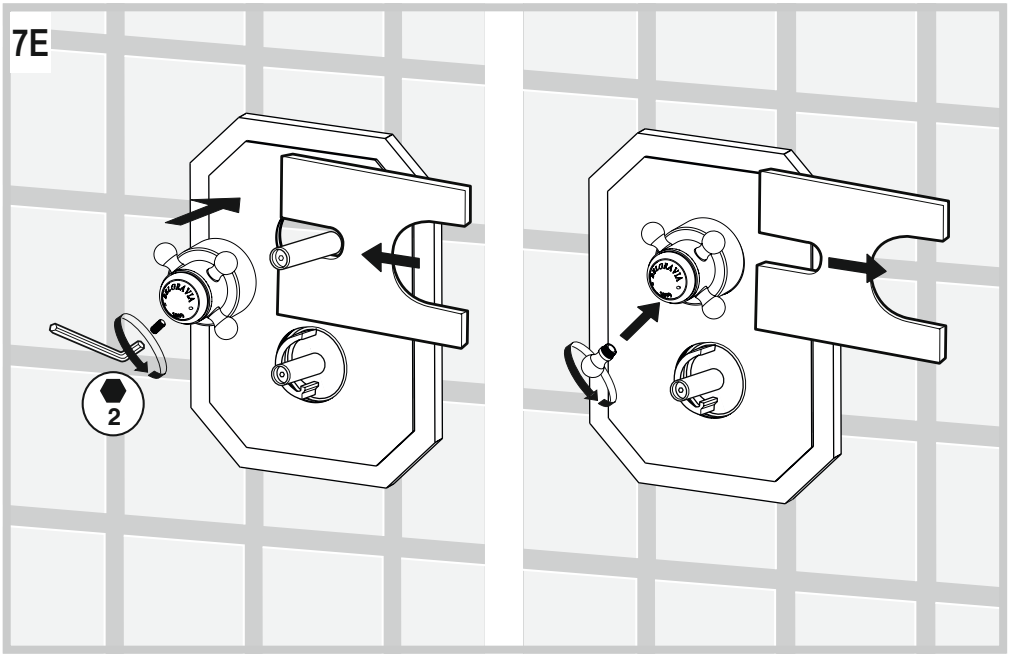


8E

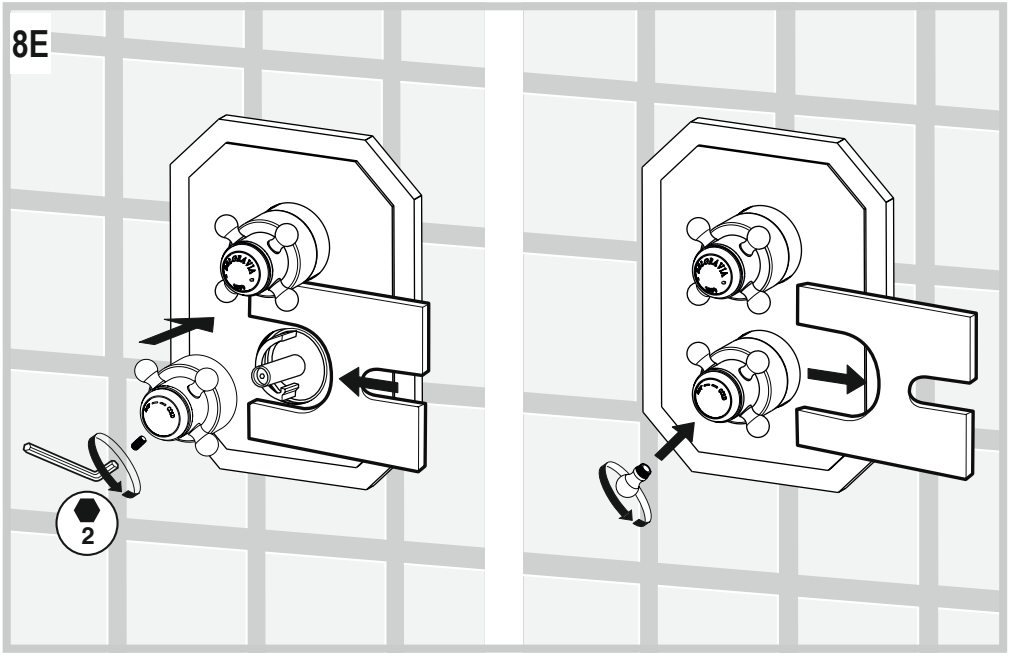


5

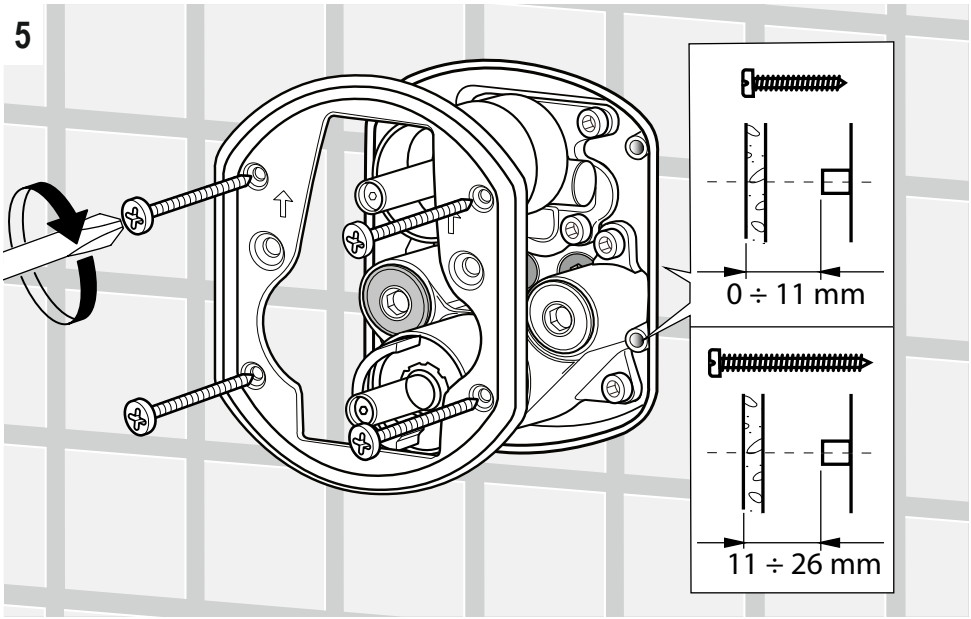


6F

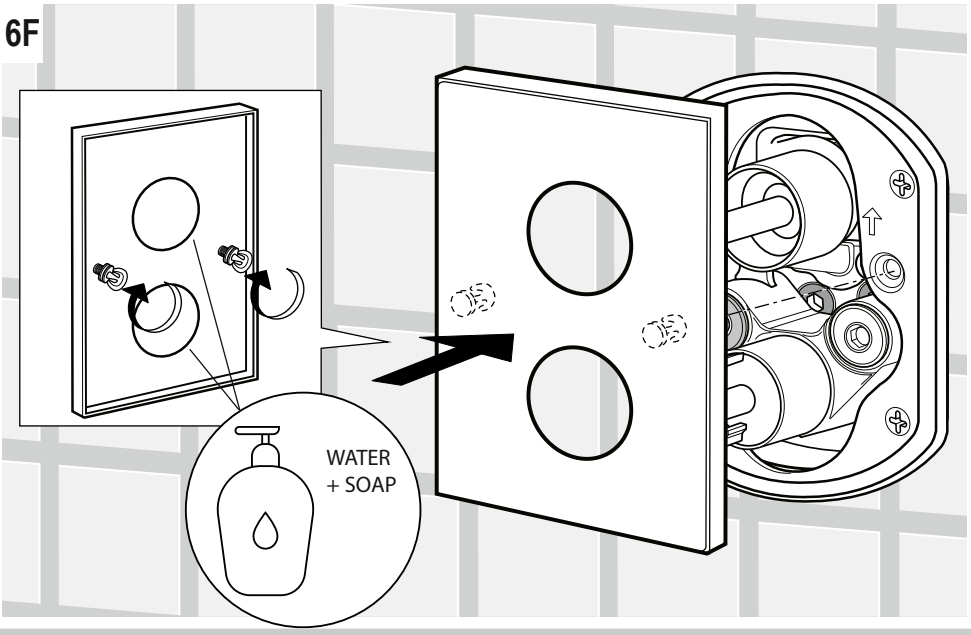


7F

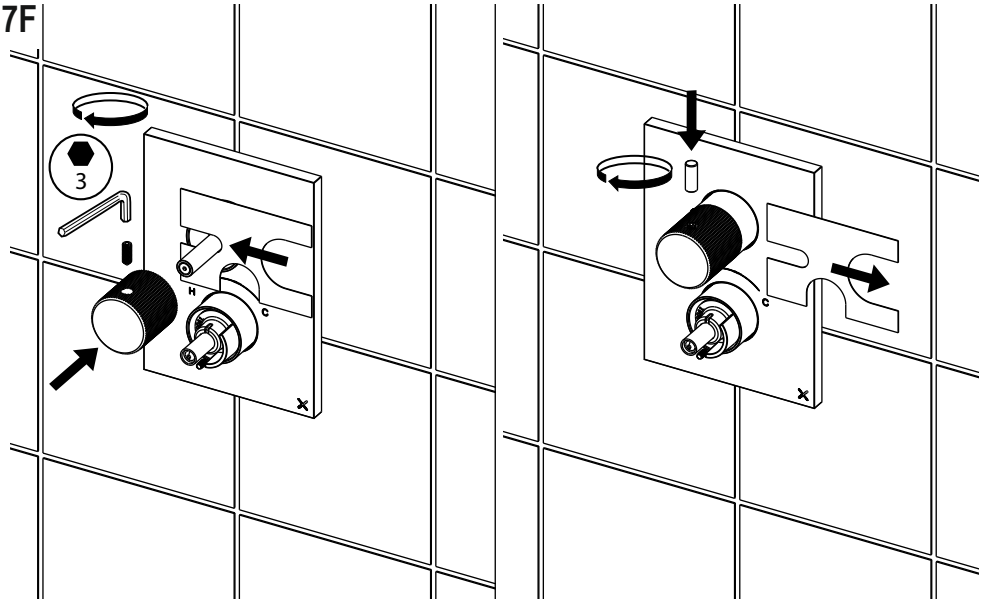


8F

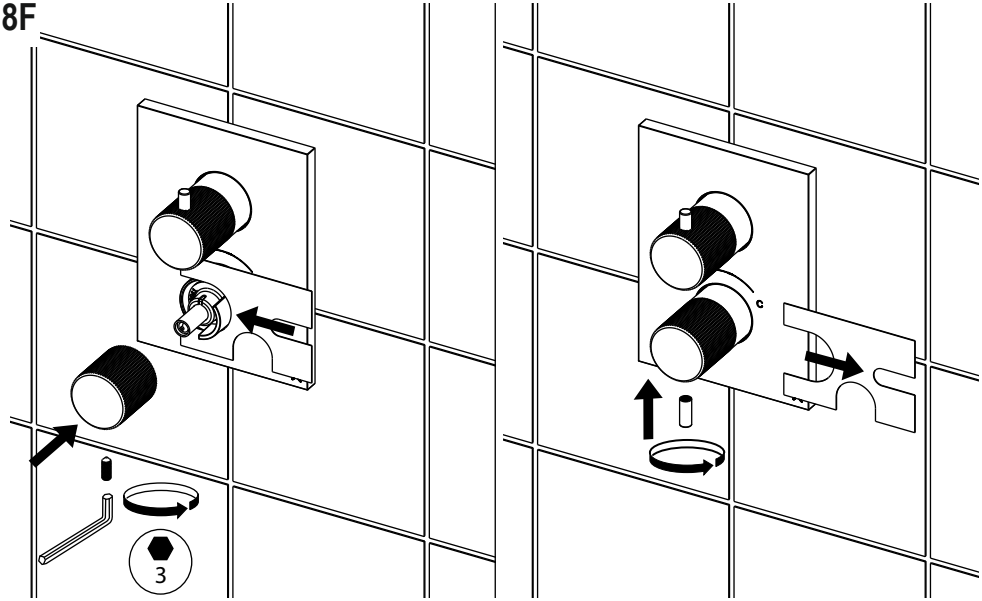

5

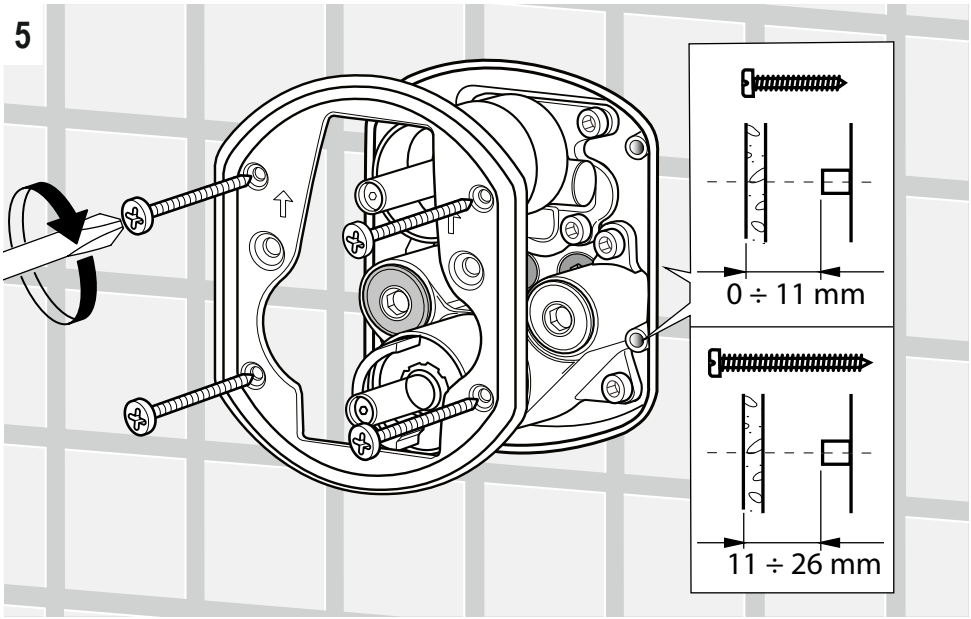


6G

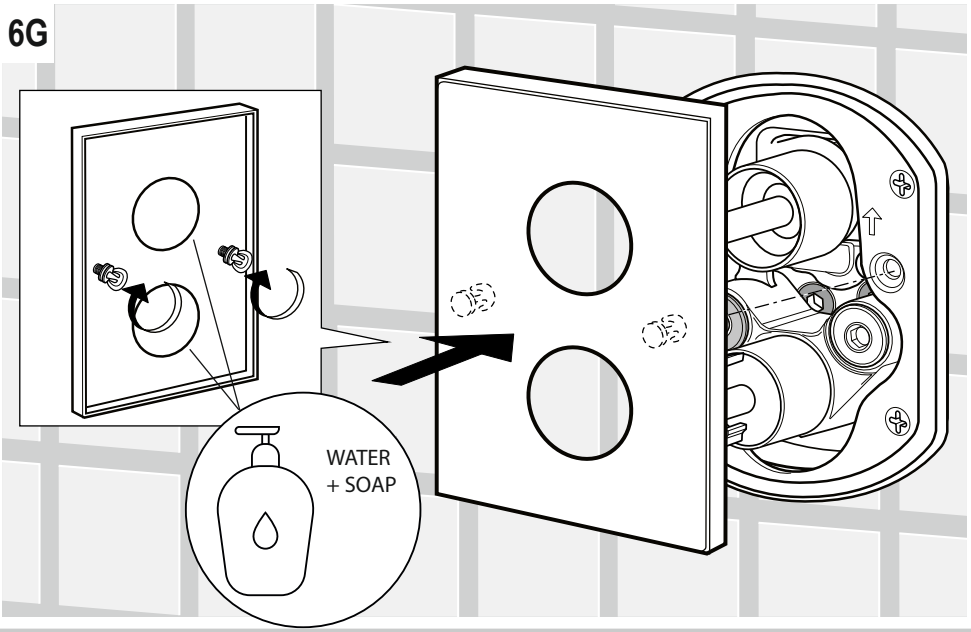


INSTALLATION


7G

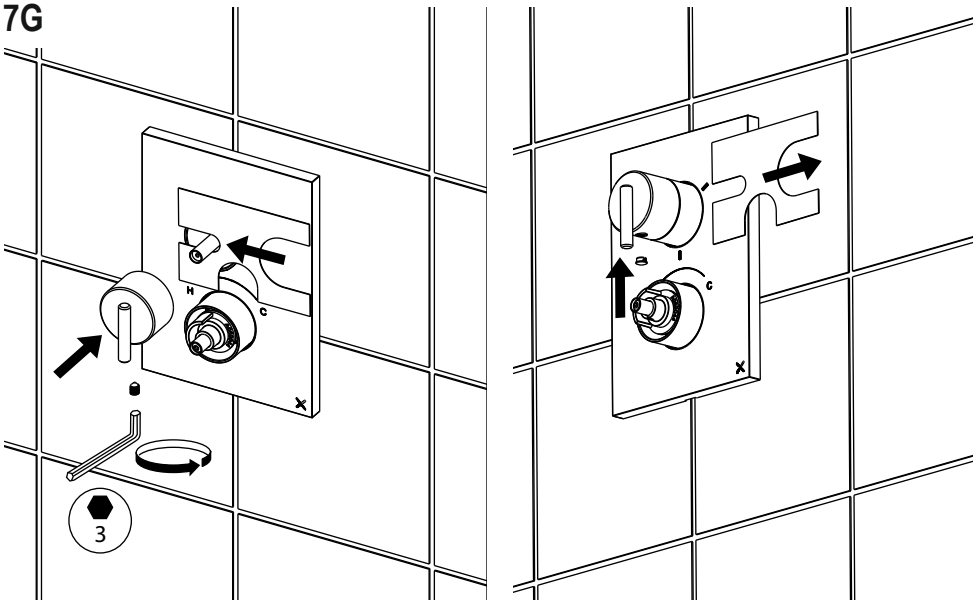


8G

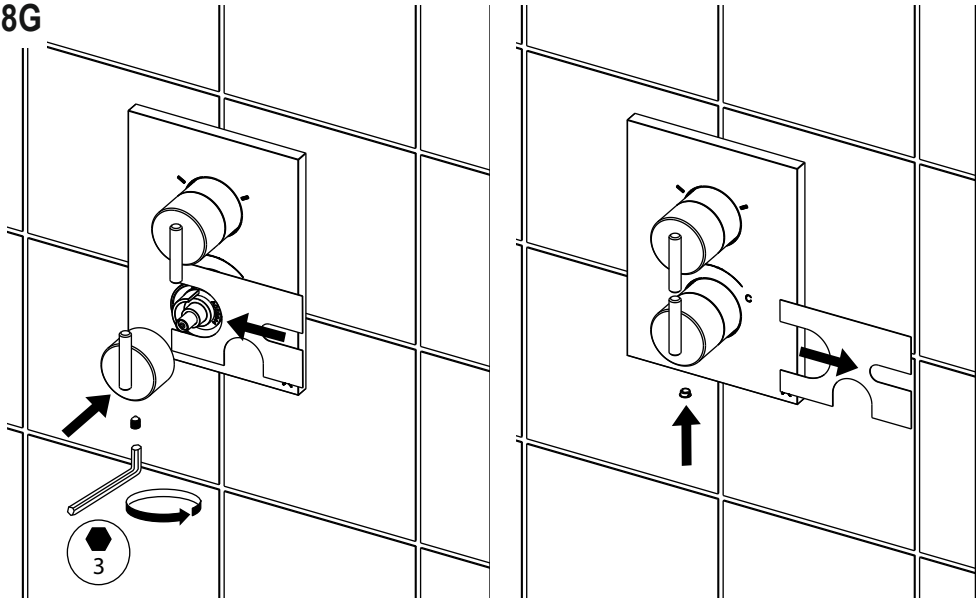



MAINTENANCE

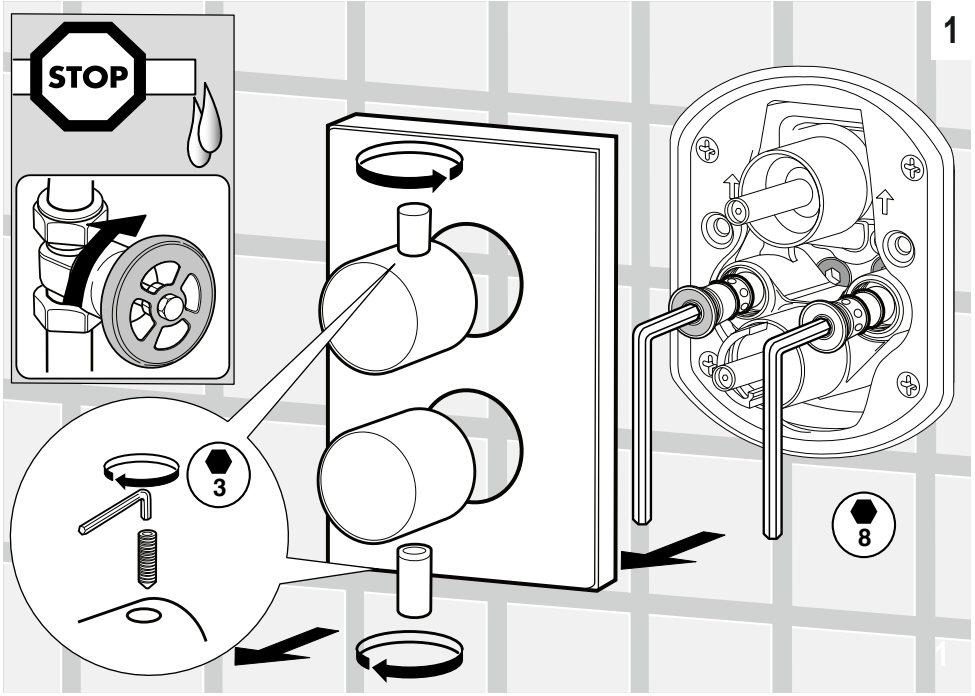


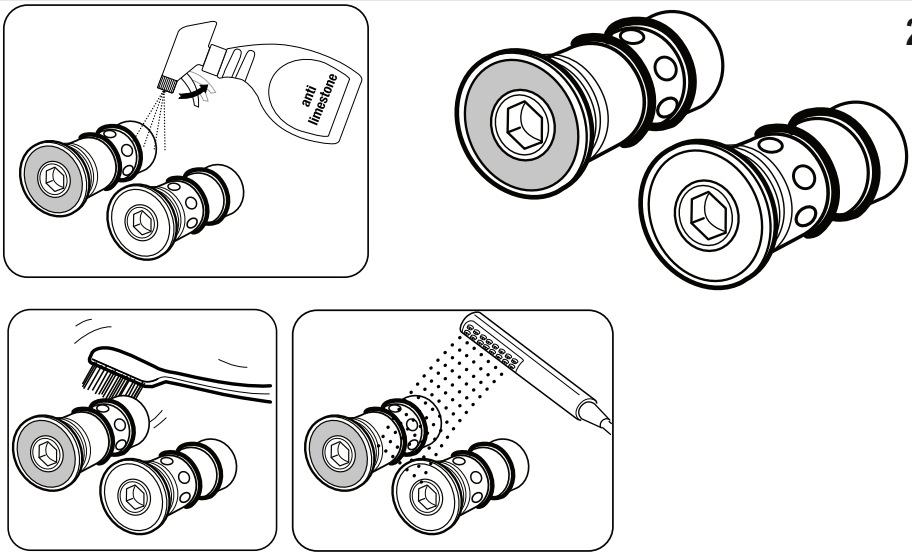


MAINTENANCE




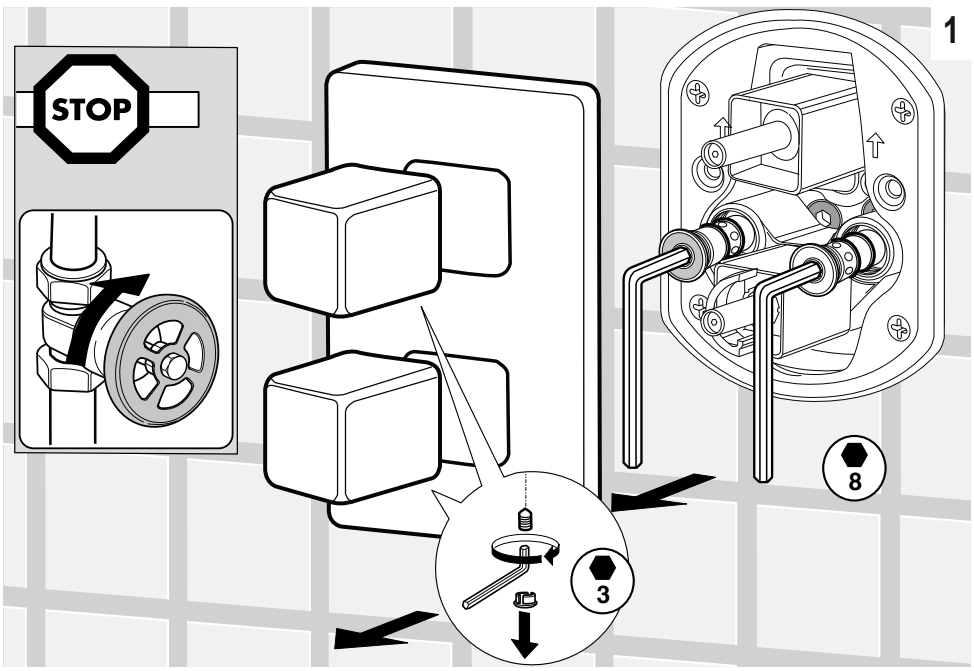

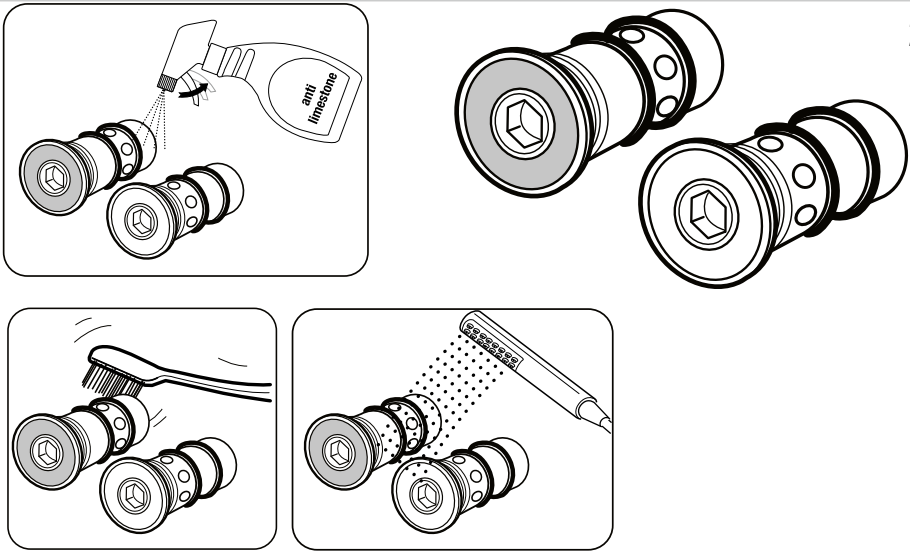



MAINTENANCE

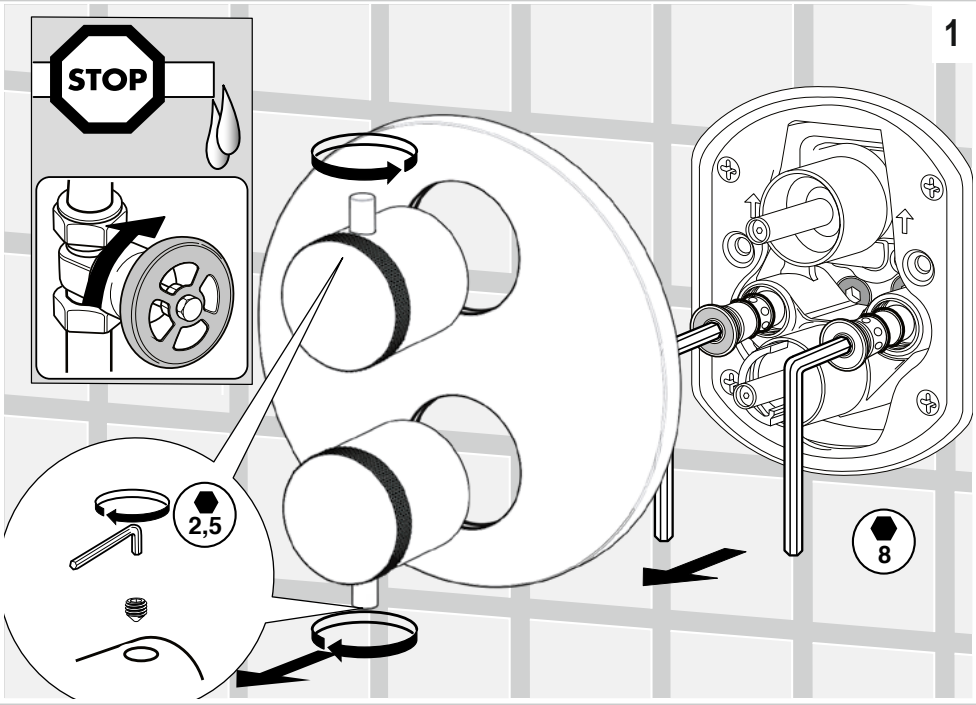

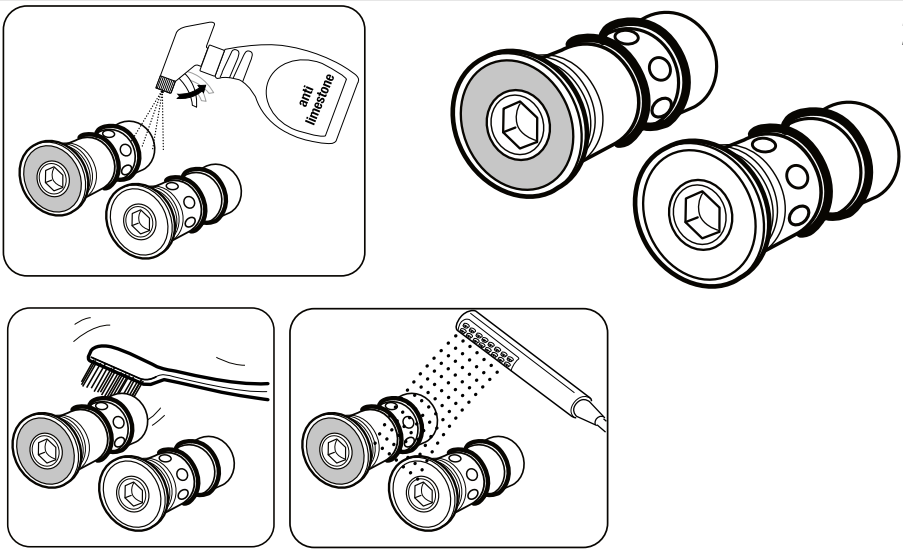


MAINTENANCE

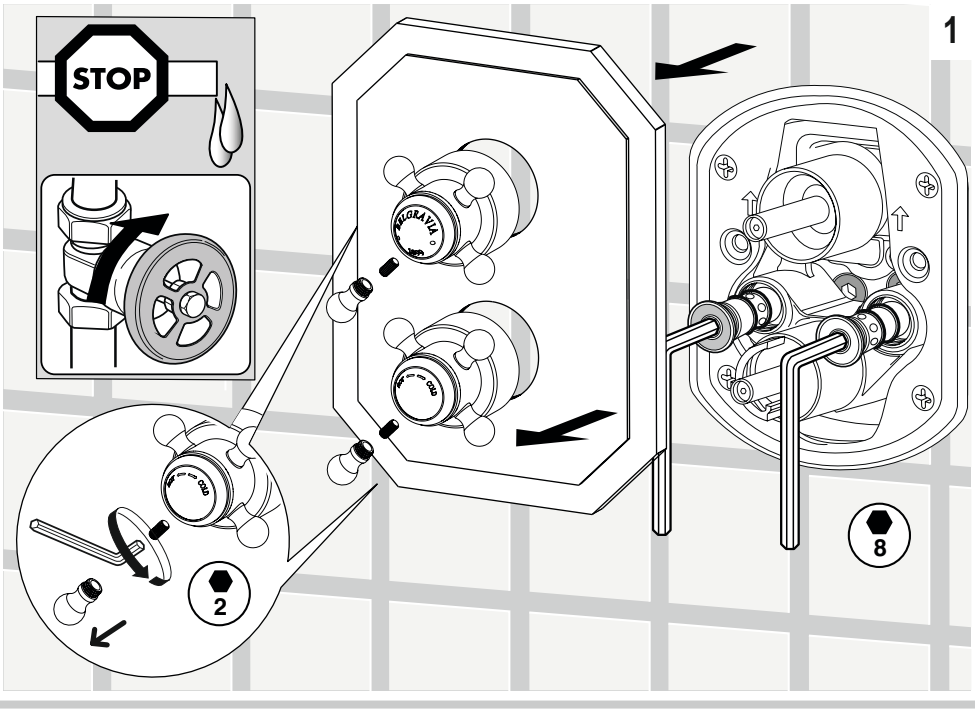


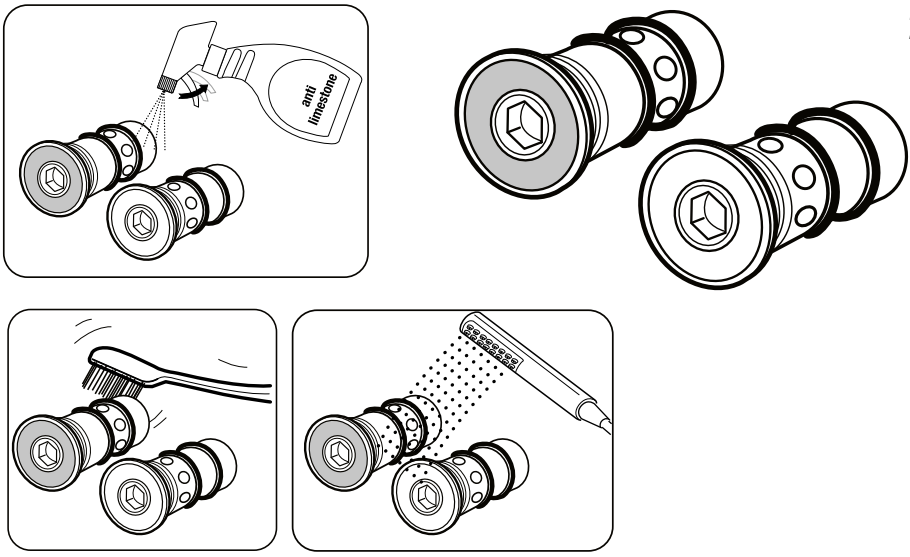


THERMOSTATIC 1 WAY

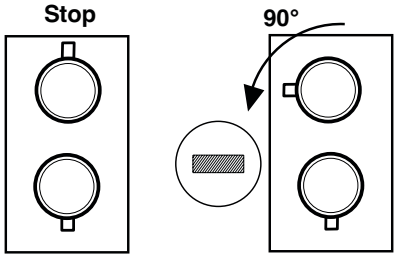


THERMOSTATIC 2 WAYS

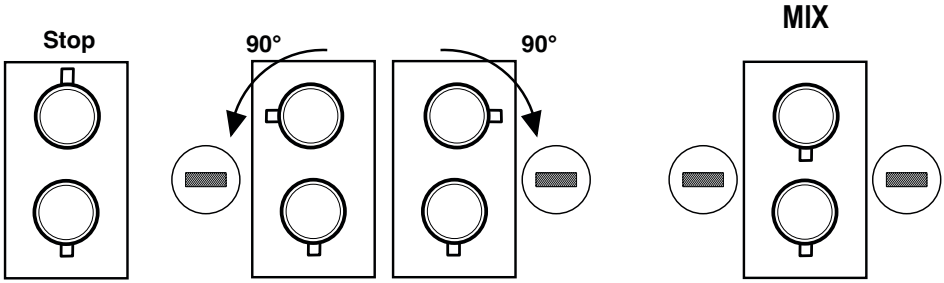

THERMOSTATIC 3 WAYS

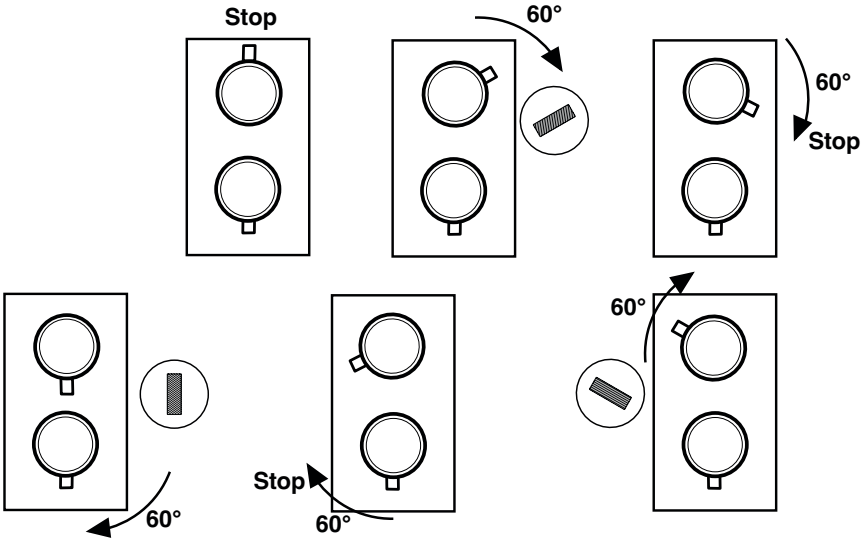


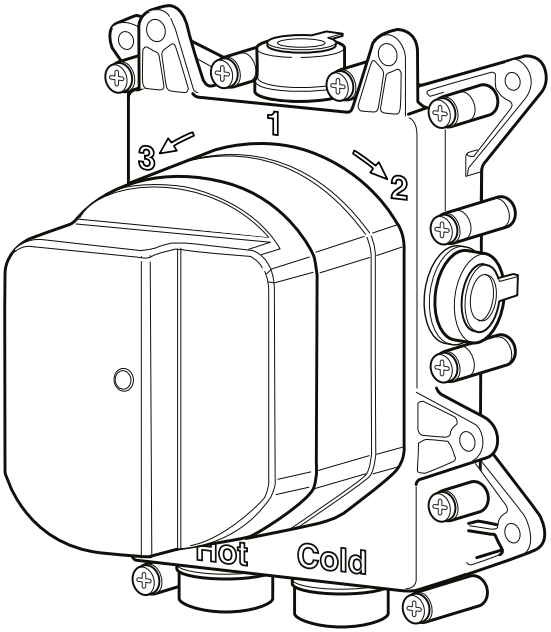



Concealed Box


Mounting Instructions


1 PACKAGE CONTENT

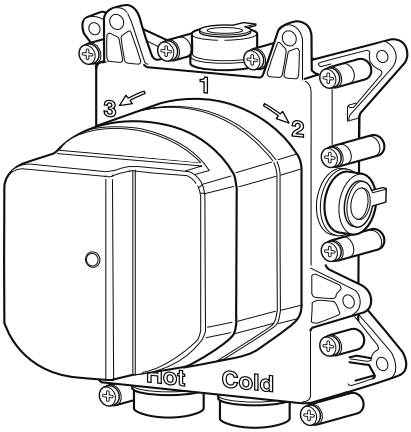

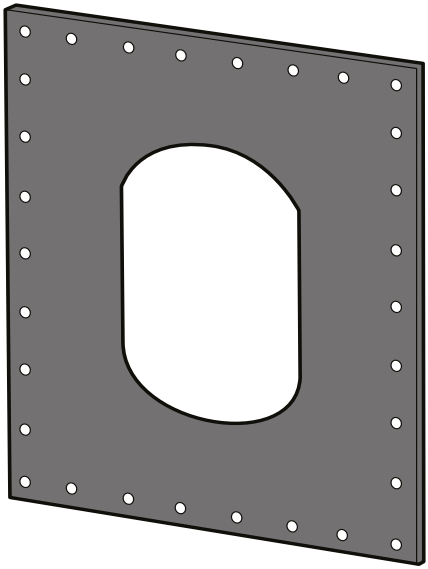










Mounting instructions



2 TECHNICAL FEATURES

Pressure range min/max 0,5/5 bar
(in case of water pressure highter than 5 bar weeracommend installing pressure reducers).
Recommended pressure 3 bar.


Operation:
Either with gas or electric accumulation boilers.
Centralised systems.



Safety lock at:	41° C
Min. Working temperature:	3° C
Min. recommended:	15° C
Max. Working temperature:	70° C
Max. recommended:	65° C
Recommended thermal differential	50° C




Thermal disinfection is allowed.

Safety system with flow stop in case of lack of one of the two waters.

Warning: contact the plumber for the choice of the best water heating device.

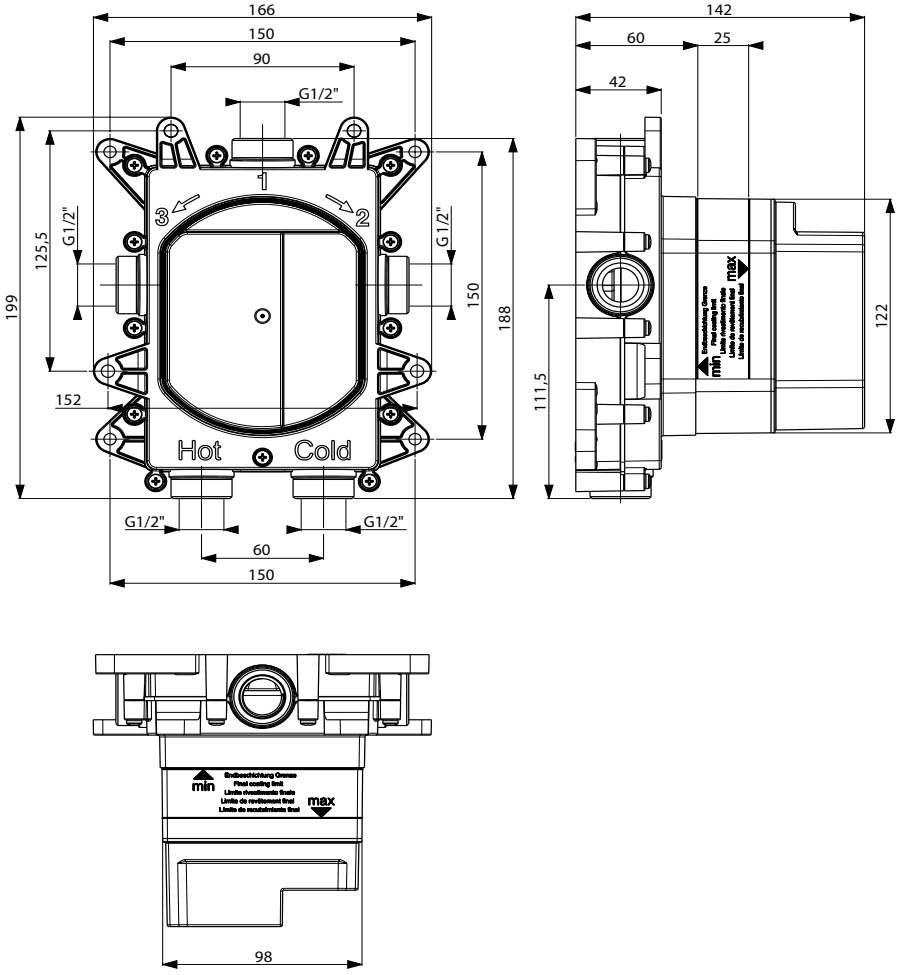

166
150
90
G1/2"
1
3
2
G1/2"
G1/2"
125,5
199
150
188
152
Hot
Cold
G1/2"
G1/2"
60
150
142
60
25
42
111,5
122
min
max
98


Press.	FLOW RATE (L/min)			
	Push button 2 ways			
	 Exit 1		 Exit 2	
bar	min.	max.	min.	max.
0,5	1,5	7,5	1,5	7,5
1	2,3	11,3	2,3	11,2
2	3,5	16,5	3,5	16
3	4,5	20,5	4,5	20
4	5,5	23,7	5,2	22,8
5	5,7	26,5	5,7	25,5

Press.	FLOW RATE (L/min)					
	Push button 3 ways					
	 Exit 1		 Exit 2		 Exit 3	
bar	min.	max.	min.	max.	min.	max.
0,5	1,8	8,1	1,8	7,7	1,8	7,7
1	2,7	11,8	2,6	11,5	2,6	11,5
2	3,9	16,8	3,9	16,7	3,9	16,7
3	4,8	20,7	4,8	20,5	4,8	20,5
4	5,5	24	5,5	23,7	5,5	23,7
5	6,2	26,7	6,2	26,6	6,2	26,6

2 WAYS - ONLY PUSH VERSION


ATTENTION:
indications valid only for PUSH VERSION!




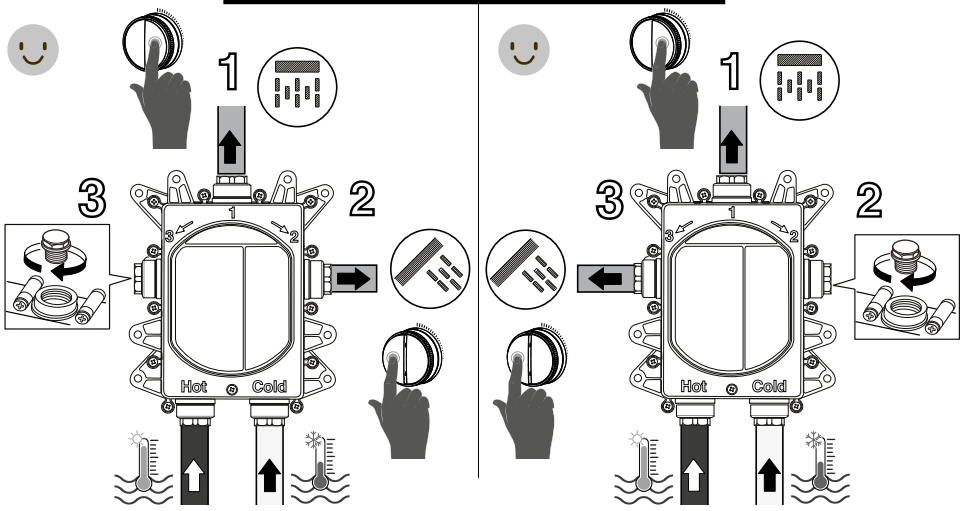




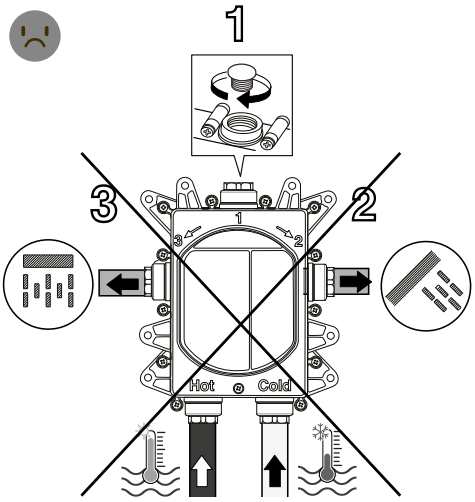


3 WAYS - ONLY PUSH VERSION


ATTENTION:
indications valid only for PUSH VERSION!

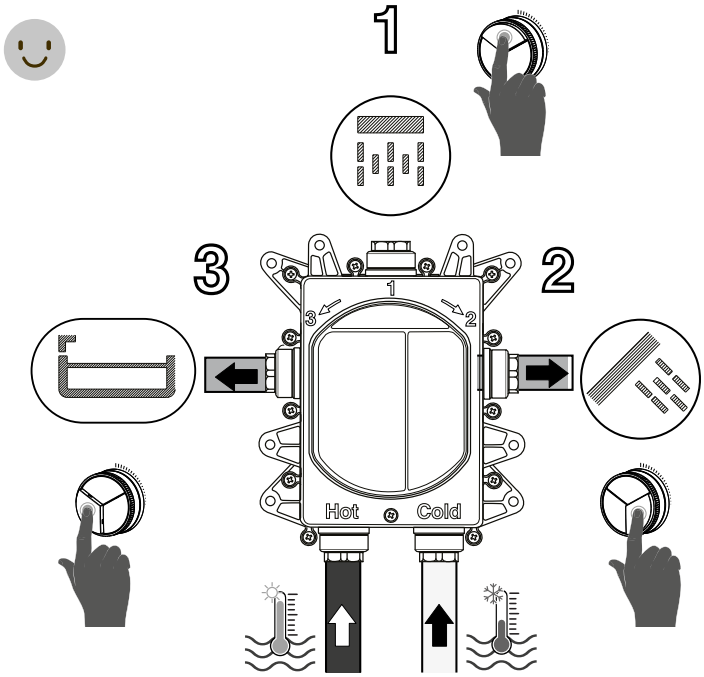


Press.	FLOW RATE (L/min)			
	Term. 1 way	Term. 2 way		
				
bar	Exit 1/2/3	Exit 2	Exit 3	Mix
0,5	8,2	8,2	8,2	9,2
1	11,7	11,7	11,7	13,2
2	16,7	16,4	16,4	18,7
3	20,7	20	20	22,9
4	24	23	23	26,4
5	26,6	25,8	25,8	29,5

Press.	FLOW RATE (L/min)		
	Term. 3 ways		
			
bar	Exit 1	Exit 2	Exit 3
0,5	9,4	8,1	8,1
1	13,4	11,6	11,6
2	19,2	16,6	16,6
3	23,7	20,5	20,5
4	27,4	23,8	23,8
5	30,5	26,6	26,6

PRE-INSTALLATION INFORMATIONS





ATTENTION:
indications valid only for OTHER VERSIONS!

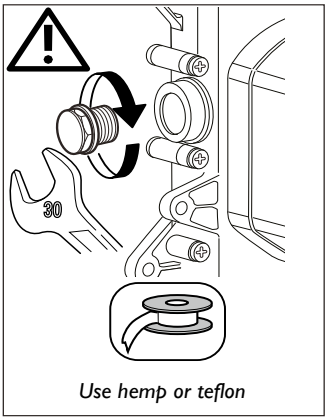


Use hemp or teflon


1 way

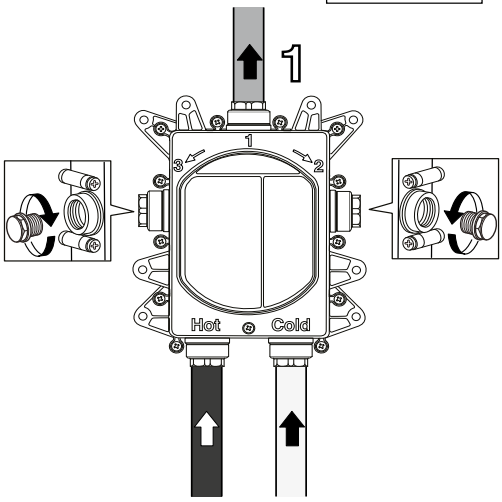

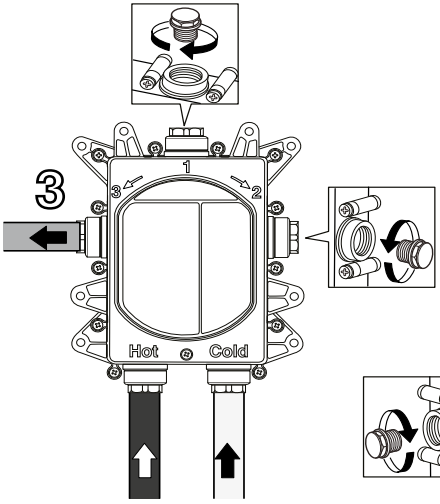

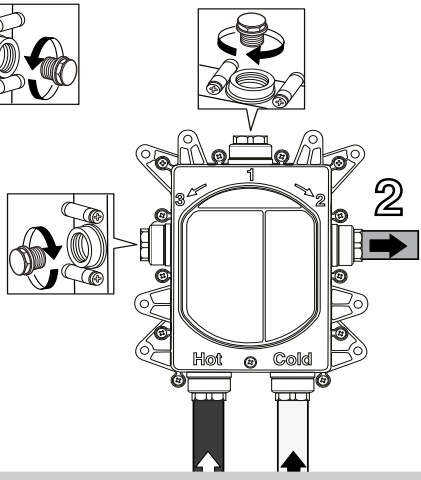


PRE-INSTALLATION INFORMATIONS





ATTENTION:
indications valid only for OTHER VERSIONS!


2 ways

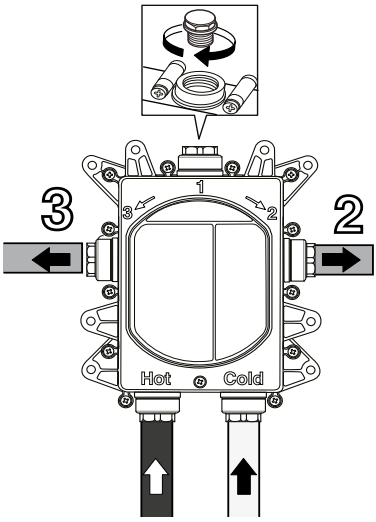


3 ways

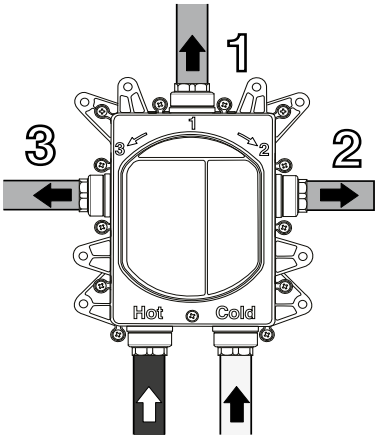


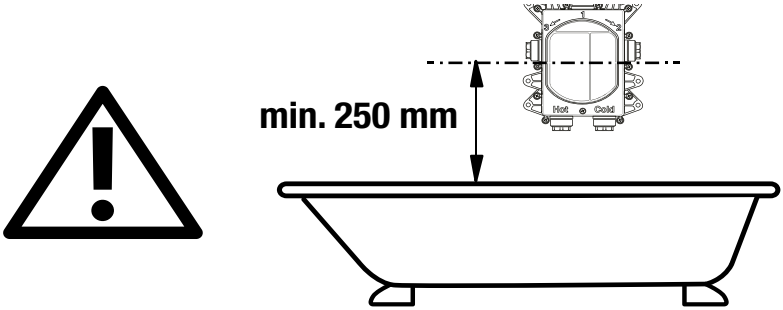
min. 250 mm
Hot
Cold

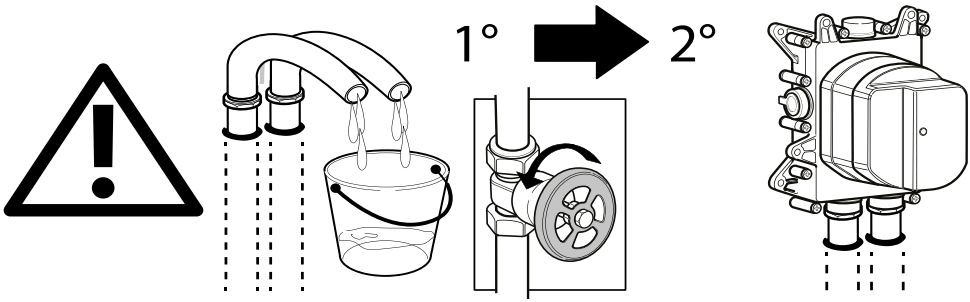

1°
2°

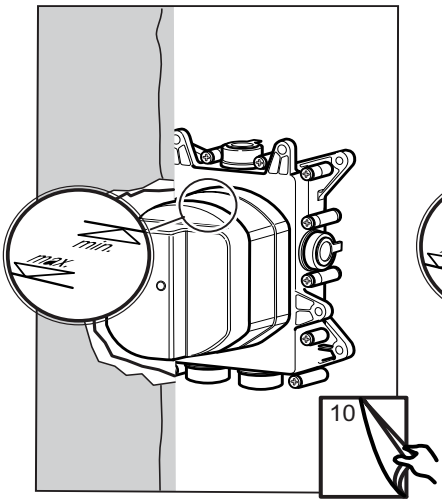



Mounting on plasterboard wall

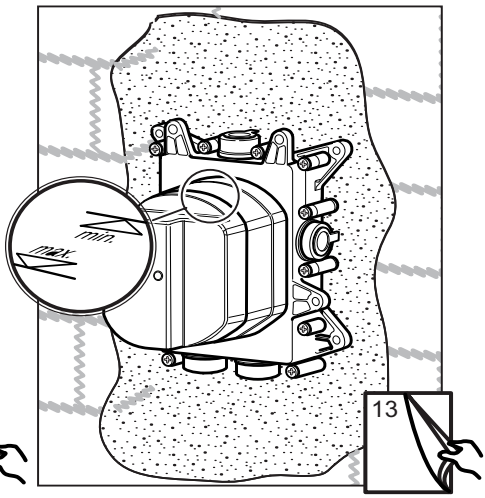



Wall mounting

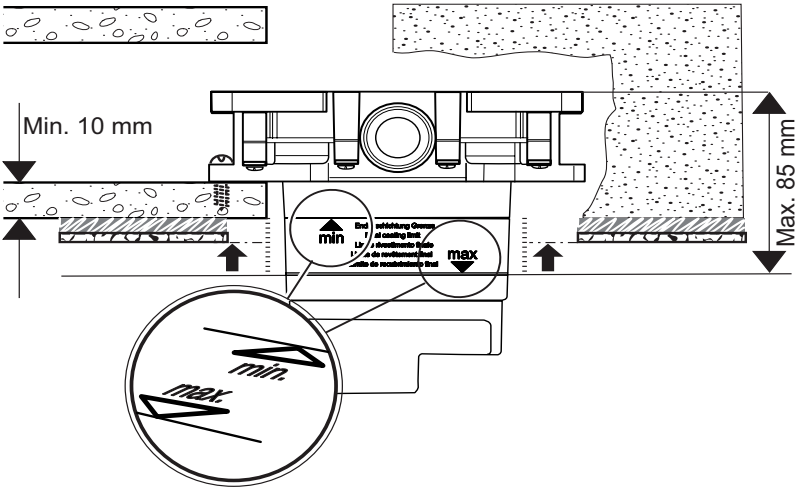


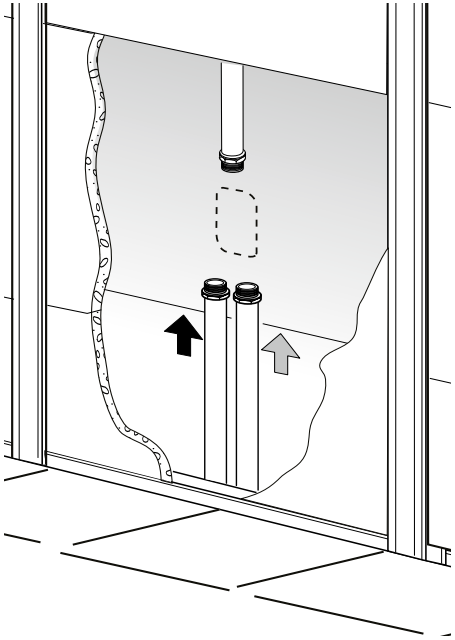


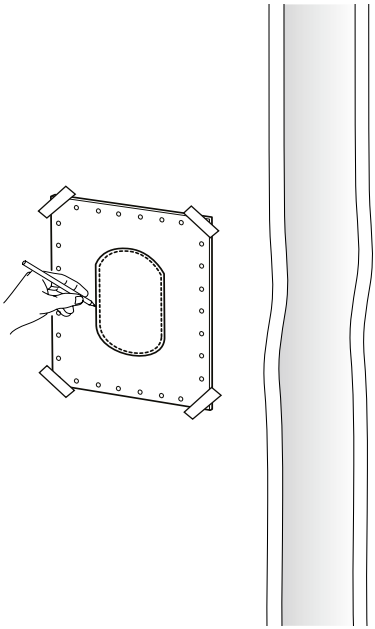

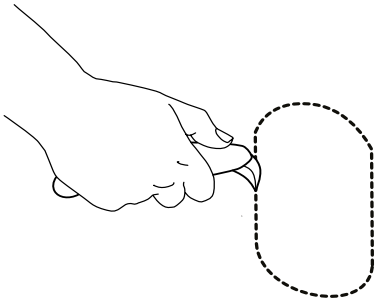


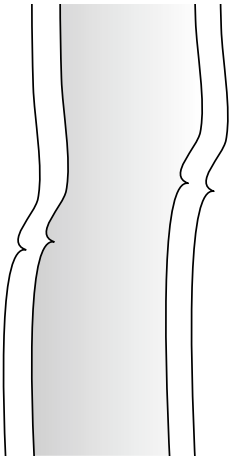

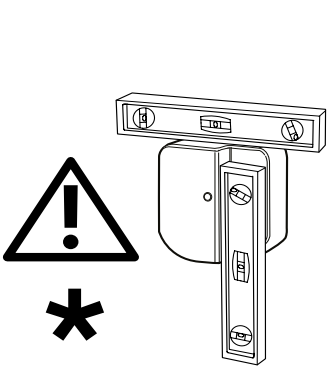





OK




NO




OK




NO





OK





NO

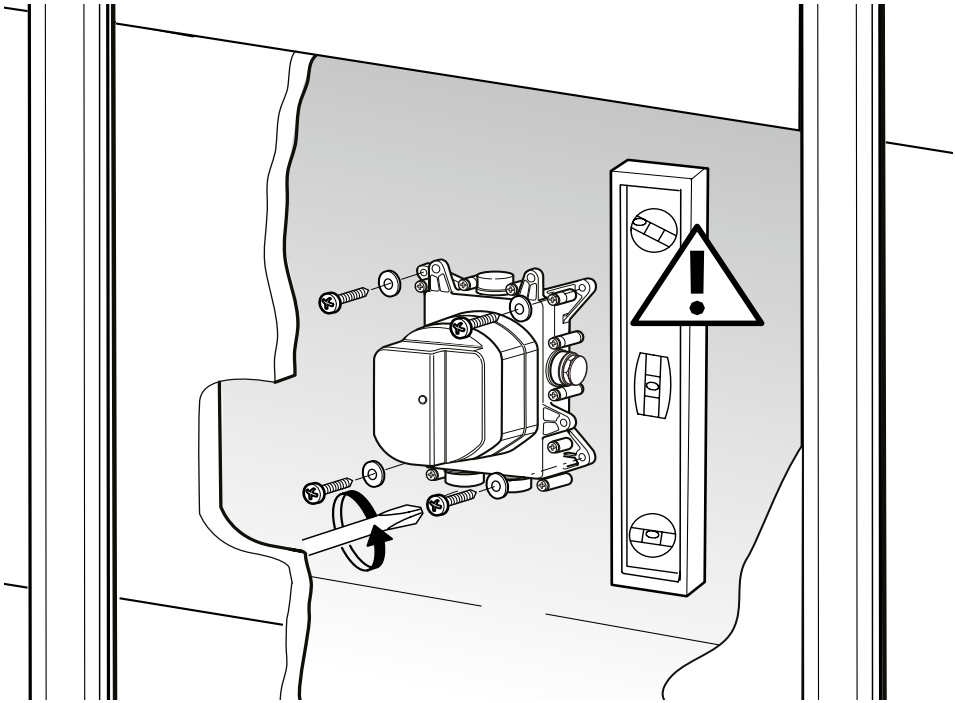

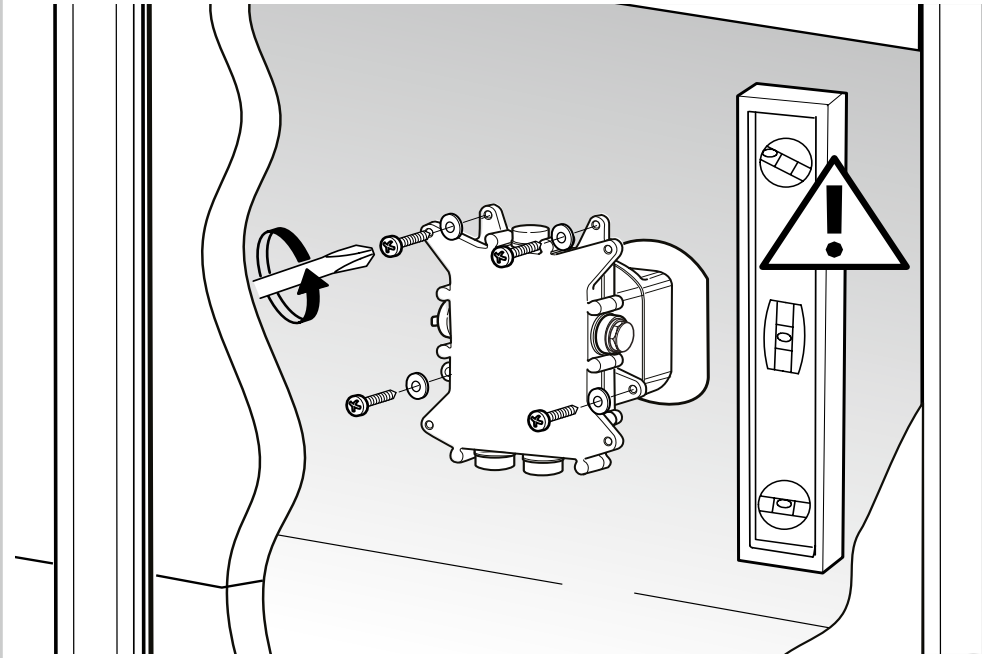


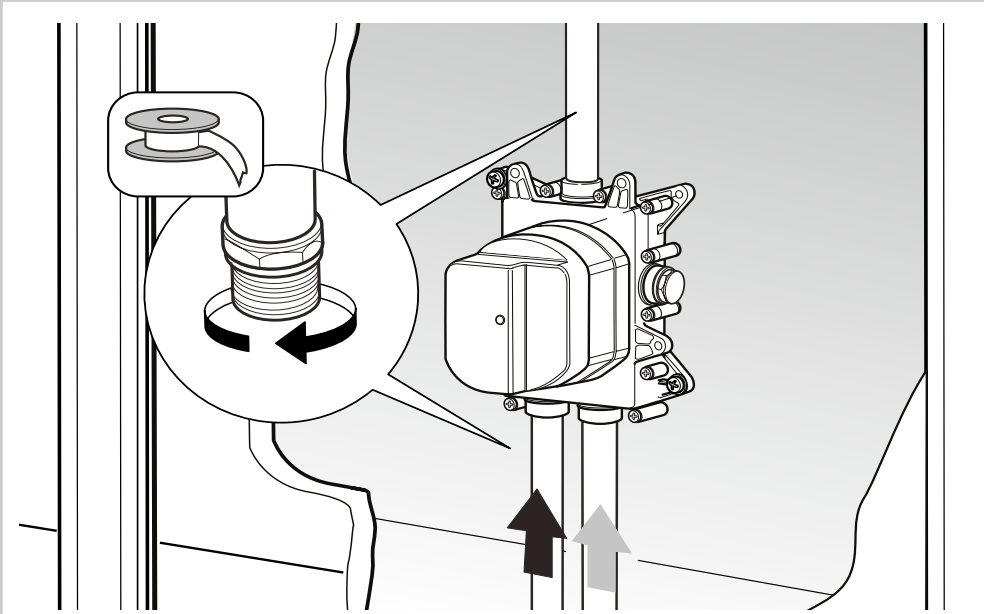


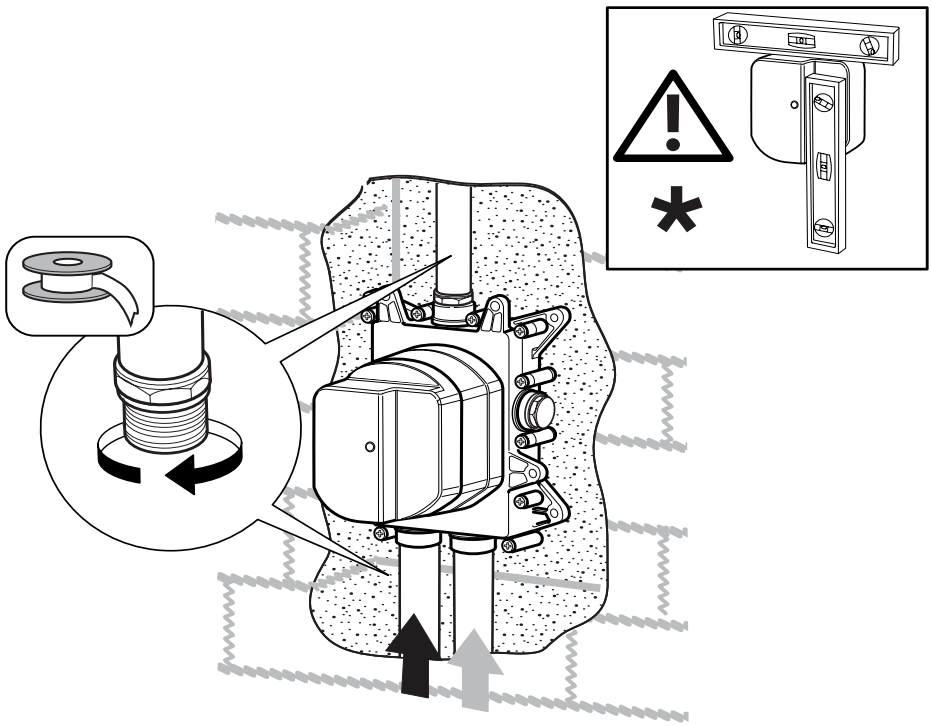

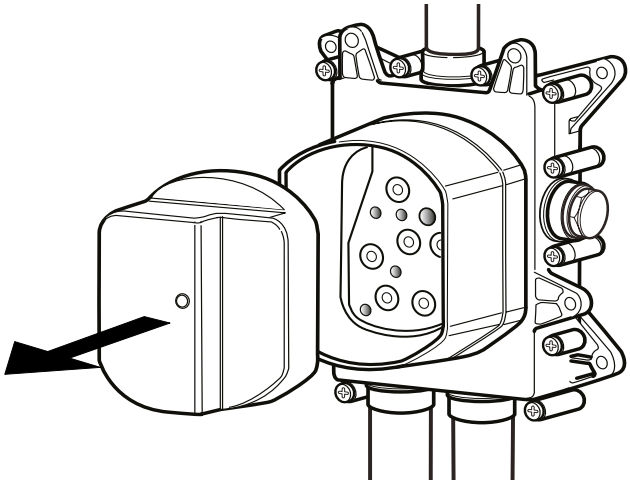



TESTSYSTEM

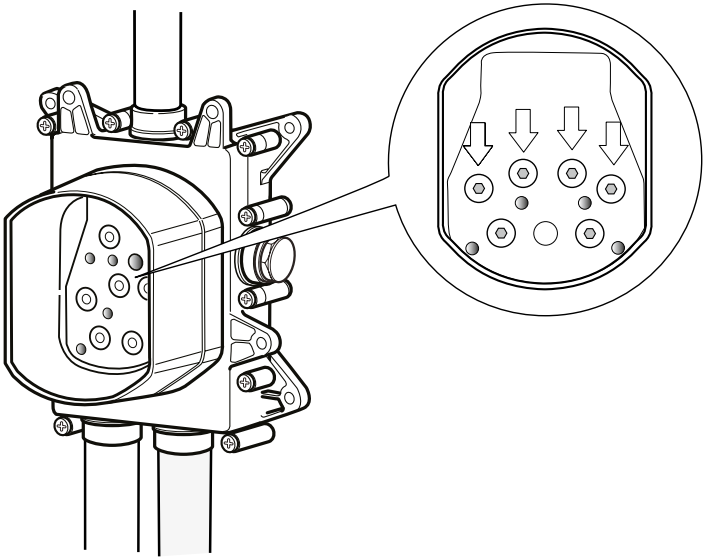


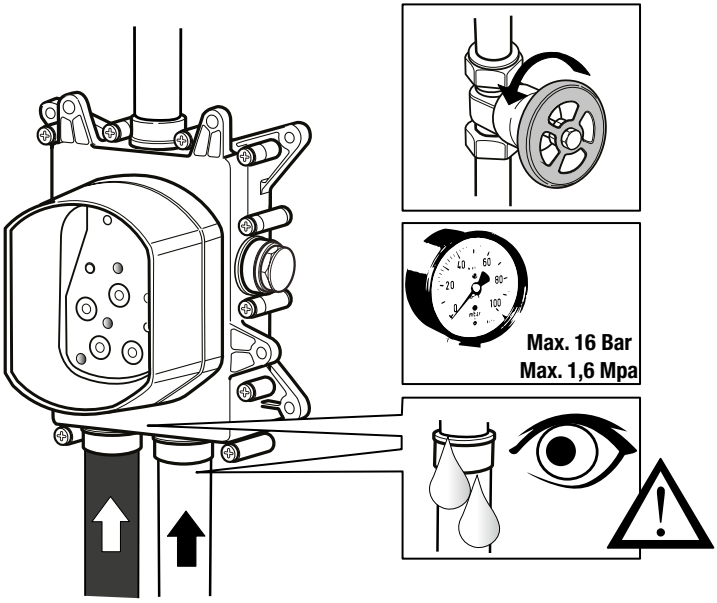


TESTSYSTEM

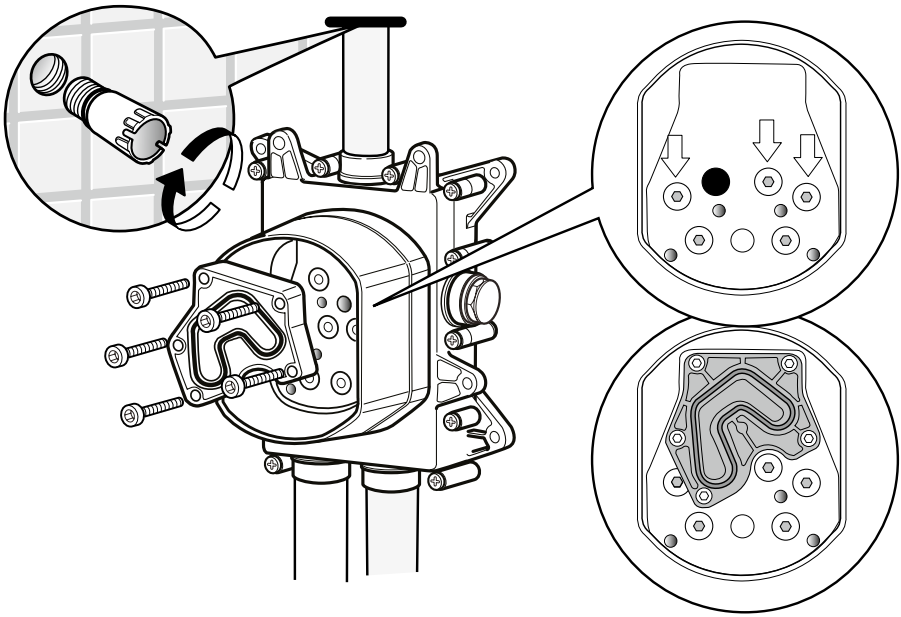

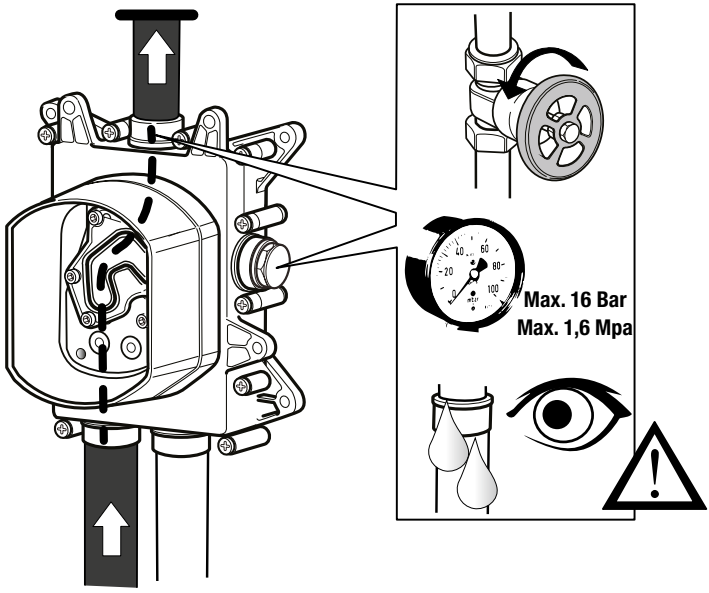

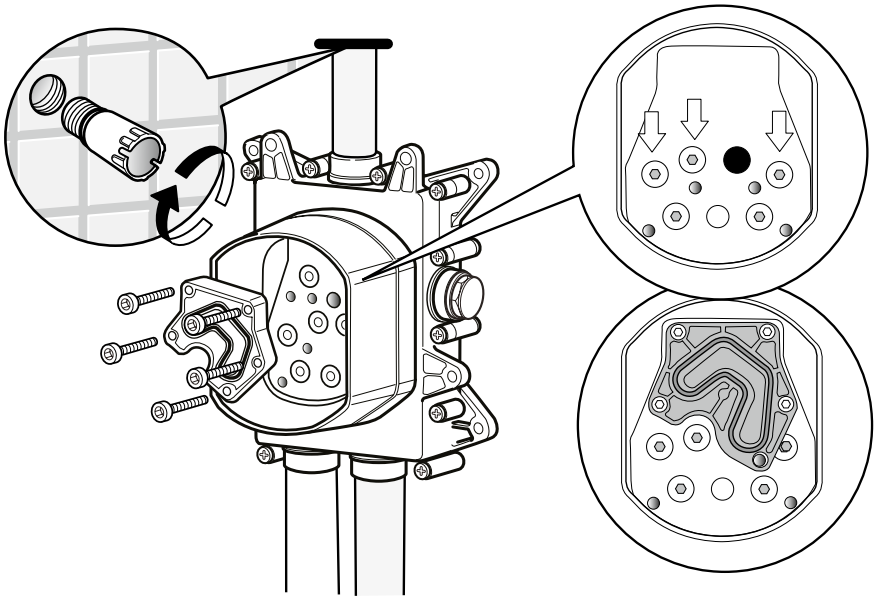

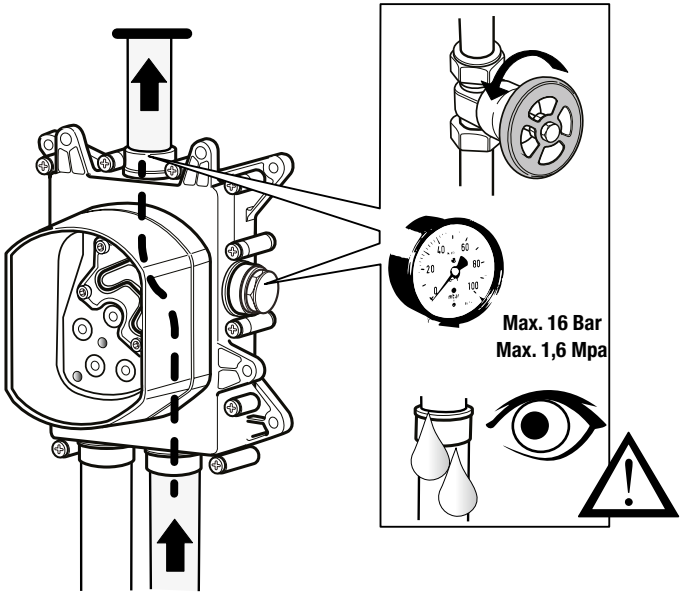
Max. 16 Bar
Max. 1,6 Mpa

