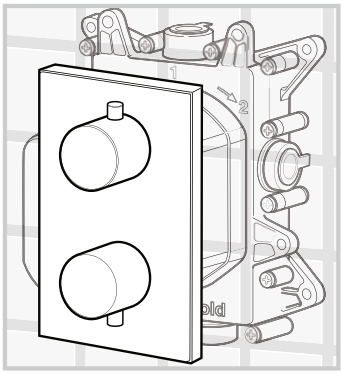
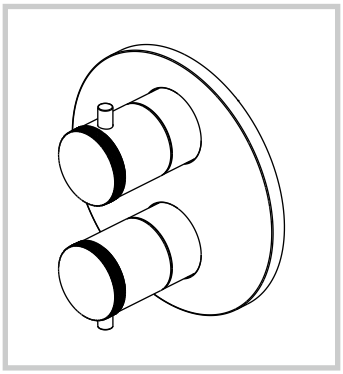
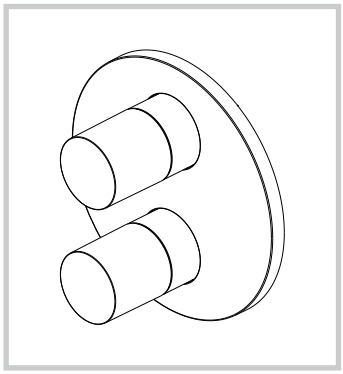
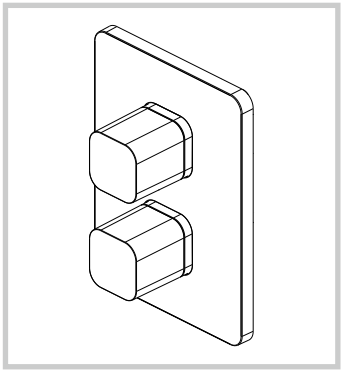
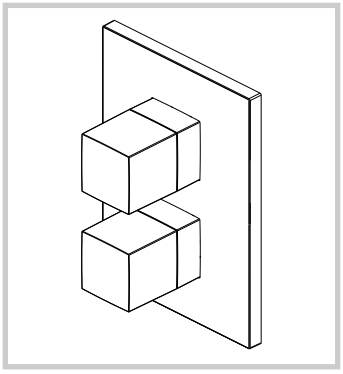
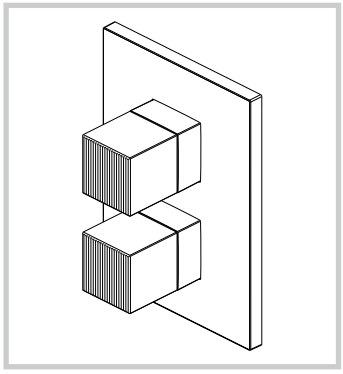
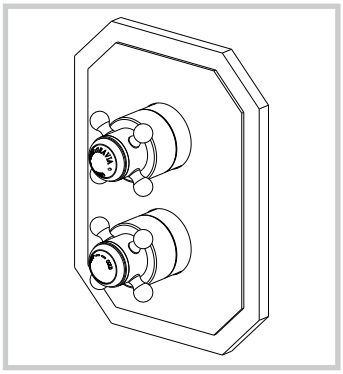
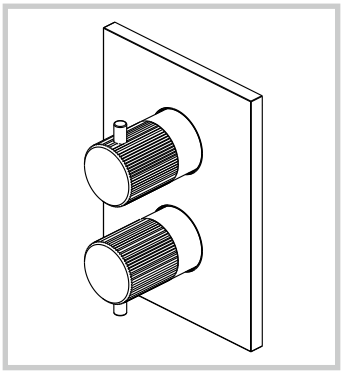
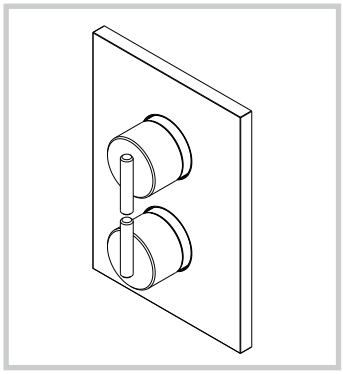

COMPLETION CONCEALED BOX

MOUNTING INSTRUCTIONS

1 TECHNICAL FEATURES

Pressure range min/max 0,5/5 bar
(in case of water pressure highter than 5 bar weeracommend installing pressure reducers).
Recommended pressure 3 bar.

Operation:
Either with gas or electric accumulation boilers.
Centralised systems.

Safety lock at:	41° C
Min. Working temperature:	3° C
Min. recommended:	15° C
Max. Working temperature:	70° C
Max. recommended:	65° C
Recommended thermal differential	50° C

Thermal disinfection is allowed.

Safety system with flow stop in case of lack of one of the two waters.

Warning: contact the plumber for the choice of the best water heating device.

Press.	FLOW RATE (L/min)			
	Term. 1 way	Term. 2 way		
				
bar	Exit 1/2/3	Exit 2	Exit 3	Mix
0,5	8,2	8,2	8,2	9,2
1	11,7	11,7	11,7	13,2
2	16,7	16,4	16,4	18,7
3	20,7	20	20	22,9
4	24	23	23	26,4
5	26,6	25,8	25,8	29,5

Press.	FLOW RATE (L/min)		
	Term. 3 ways		
bar	Exit 1	Exit 2	Exit 3
0,5	9,4	8,1	8,1
1	13,4	11,6	11,6
2	19,2	16,6	16,6
3	23,7	20,5	20,5
4	27,4	23,8	23,8
5	30,5	26,6	26,6

4 PRE-INSTALLATION INFORMATIONS

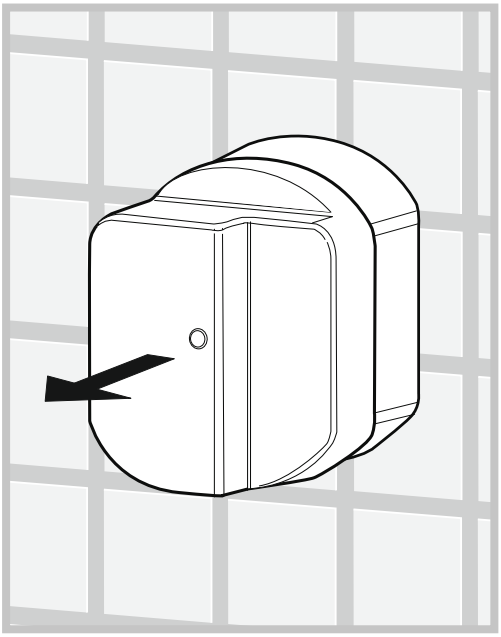

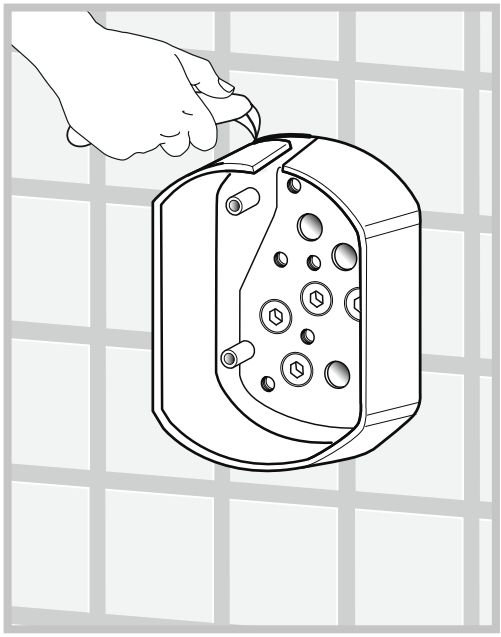

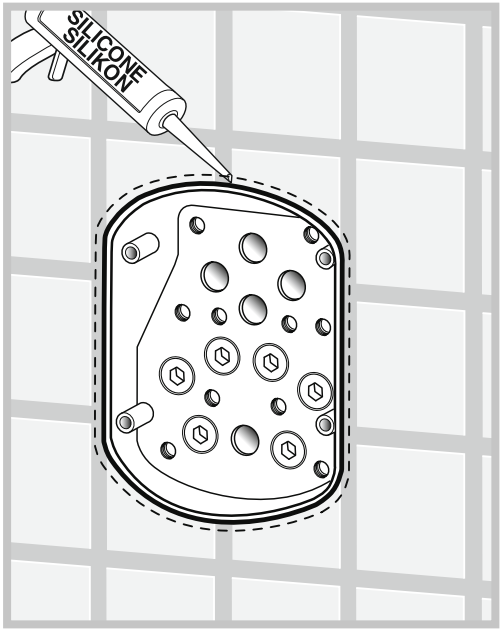

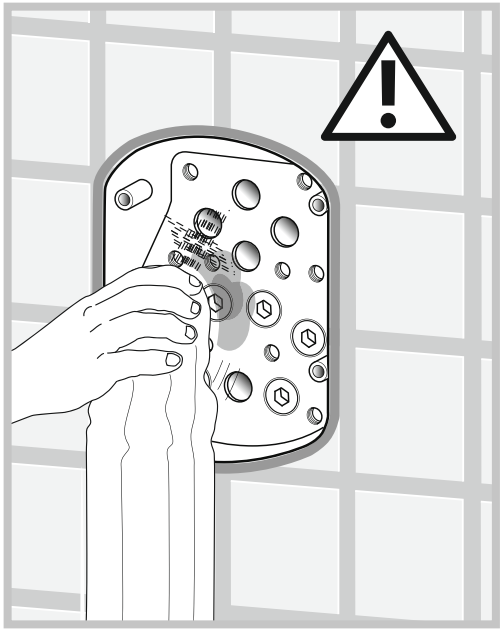

5 PACKAGE CONTENT - THERMOSTATIC 1-2-3 WAYS











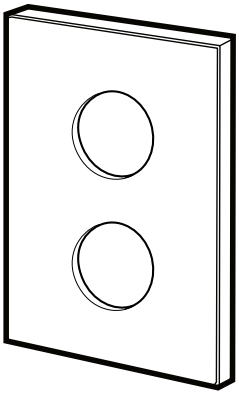

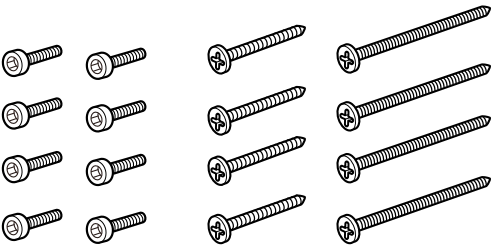

GB Mounting Instructions



6 PACKAGE CONTENT - THERMOSTATIC 1-2-3 WAYS



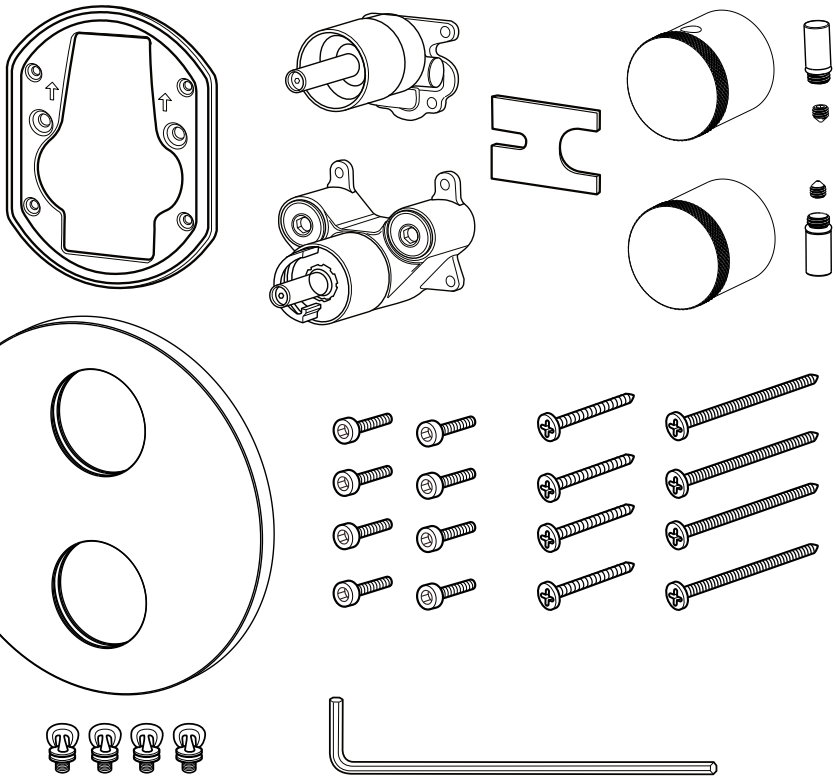

GB Mounting Instructions

7 PACKAGE CONTENT - THERMOSTATIC 1-2-3 WAYS

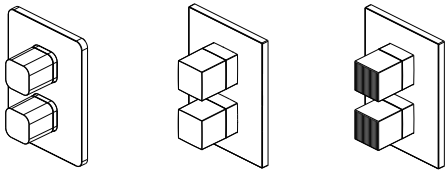

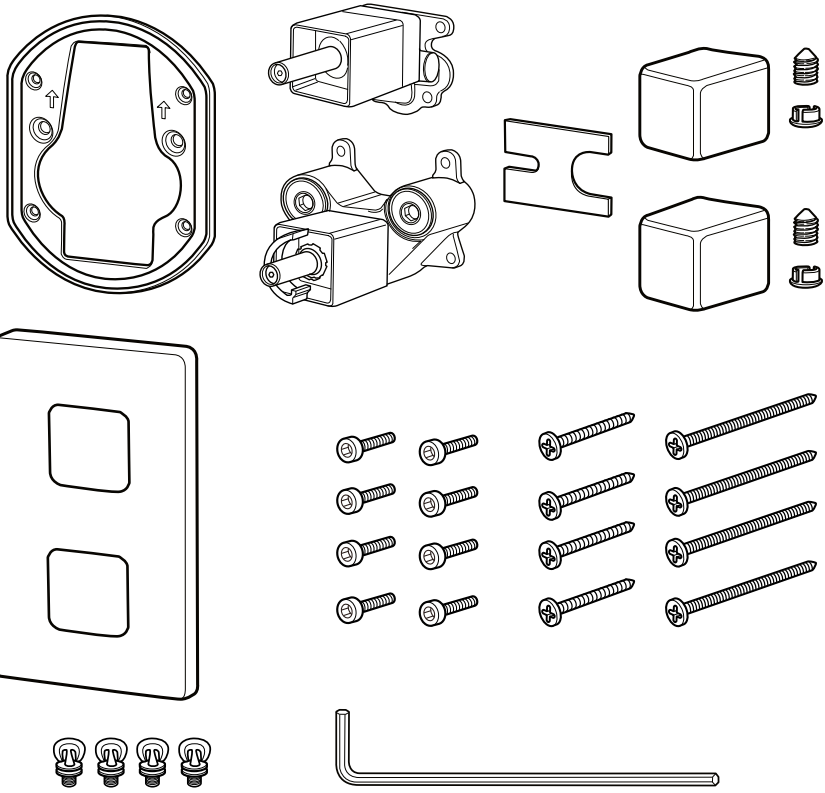

GB Mounting Instructions

8 PACKAGE CONTENT - THERMOSTATIC 1-2-3 WAYS



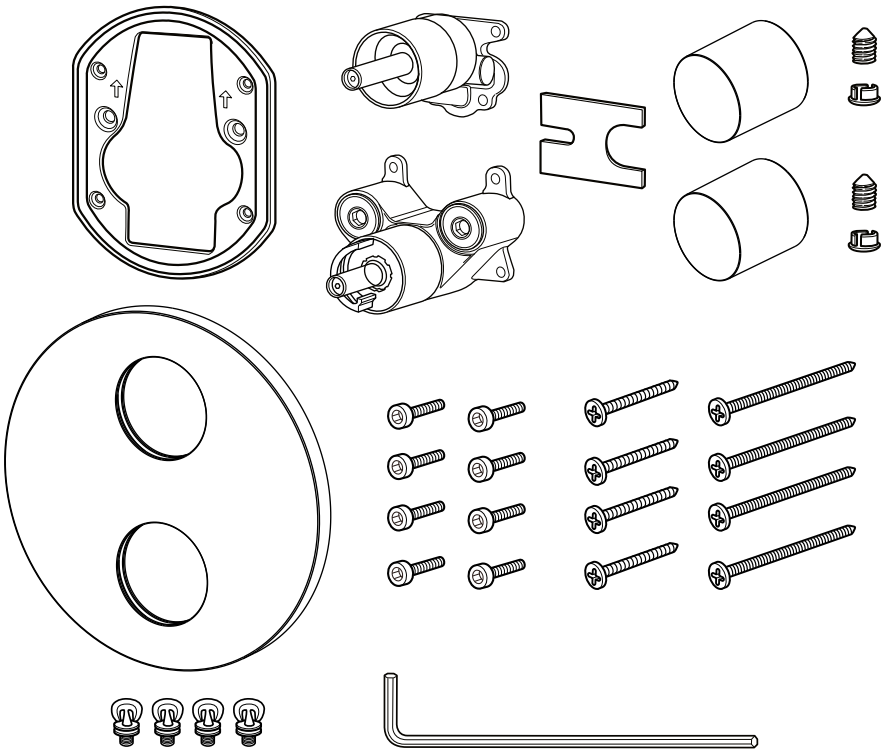

GB Mounting Instructions

9 PACKAGE CONTENT - THERMOSTATIC 1-2-3 WAYS



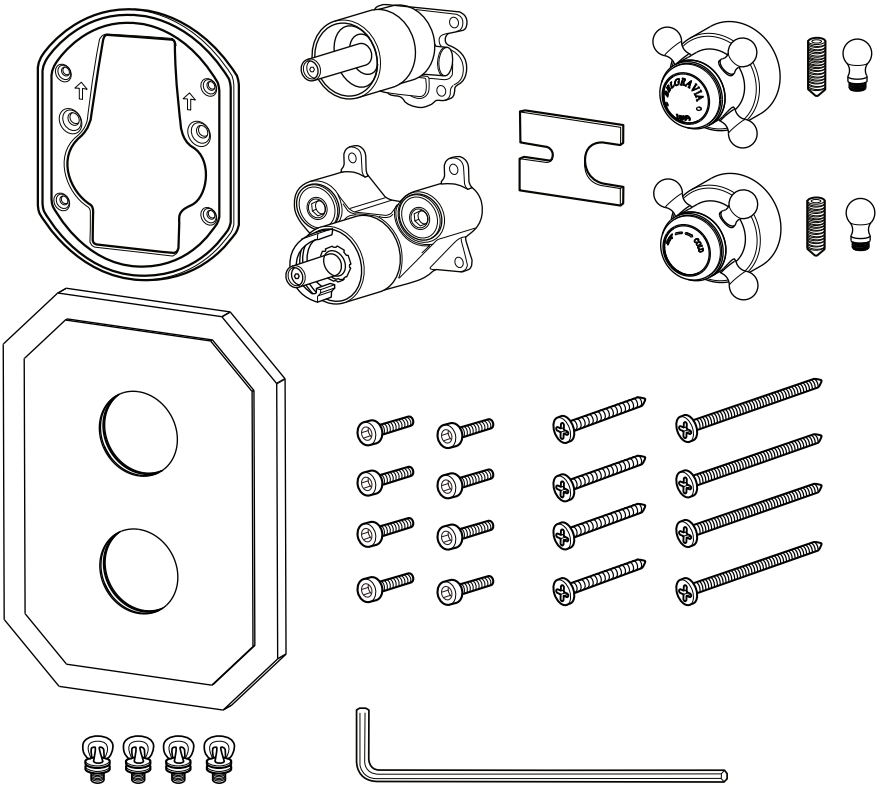

GB Mounting Instructions

10 PACKAGE CONTENT - THERMOSTATIC 1-2-3 WAYS



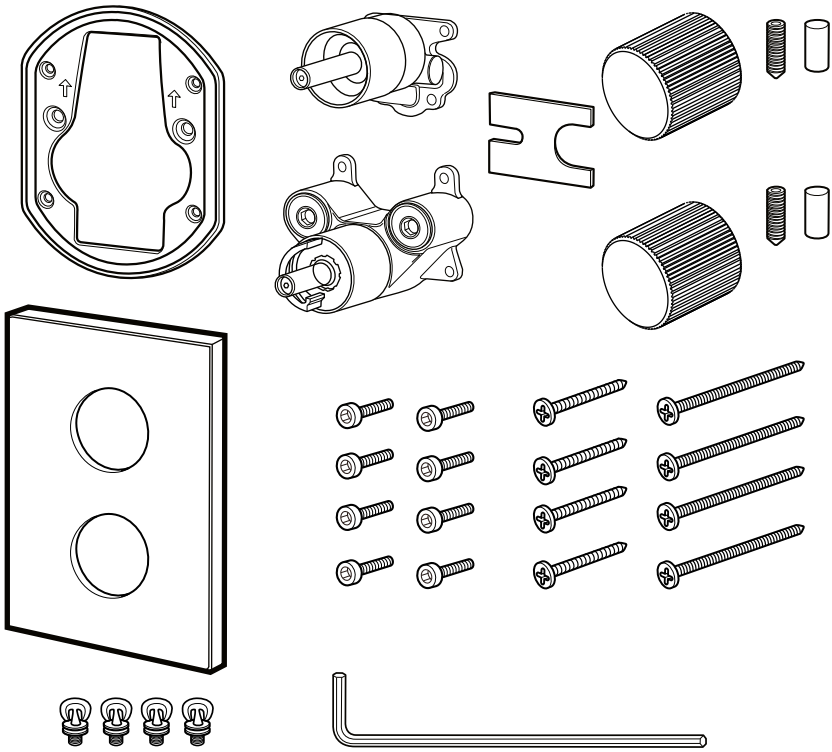

GB Mounting Instructions

11 PACKAGE CONTENT - THERMOSTATIC 1-2-3 WAYS



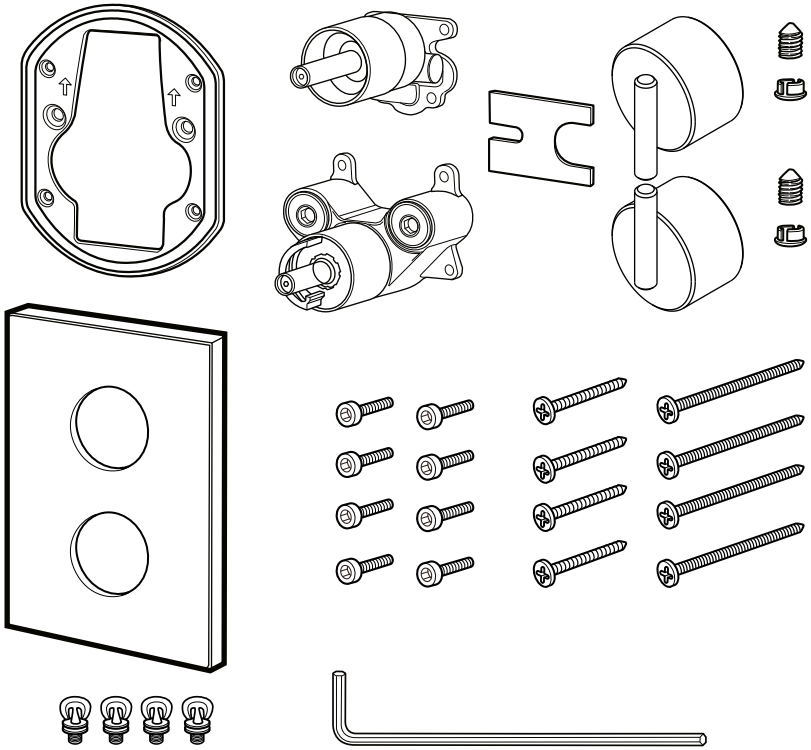

GB Mounting Instructions

1

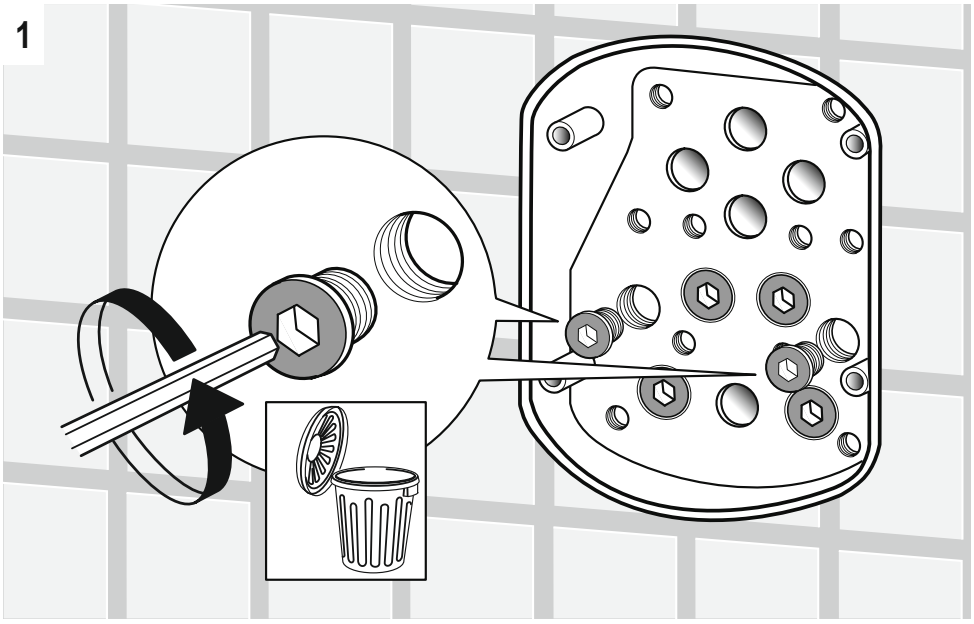

2

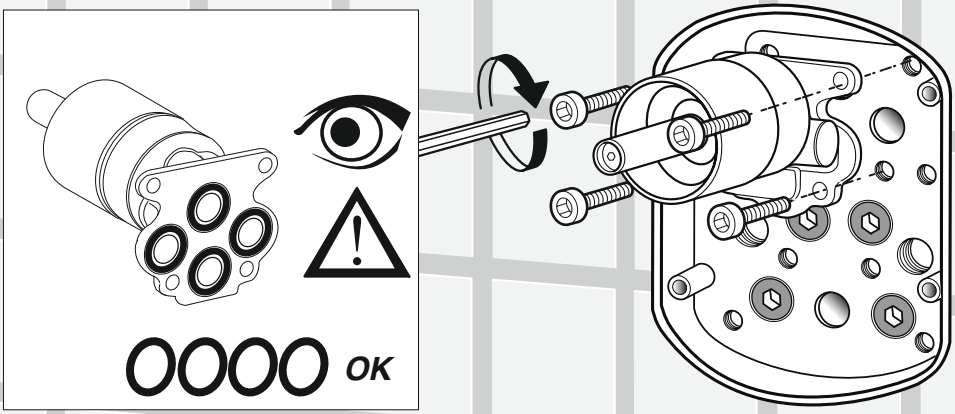

3

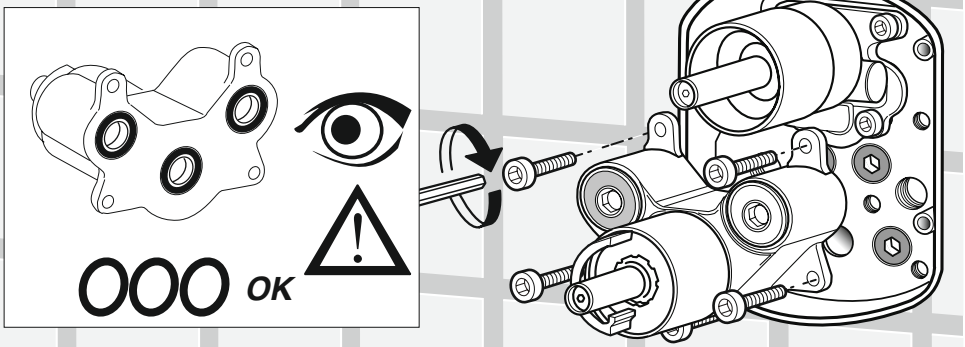

4

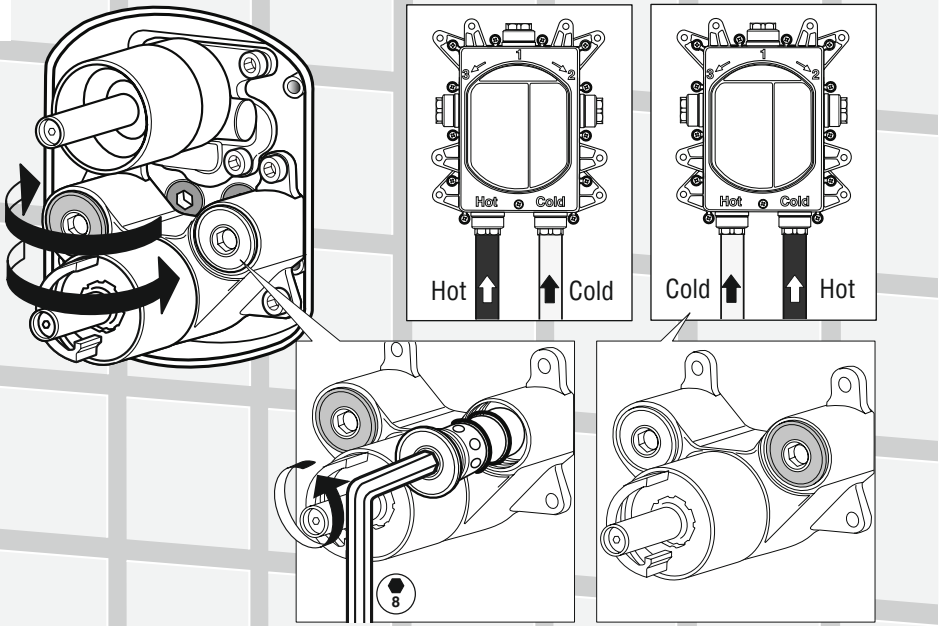

INSTALLATION

5

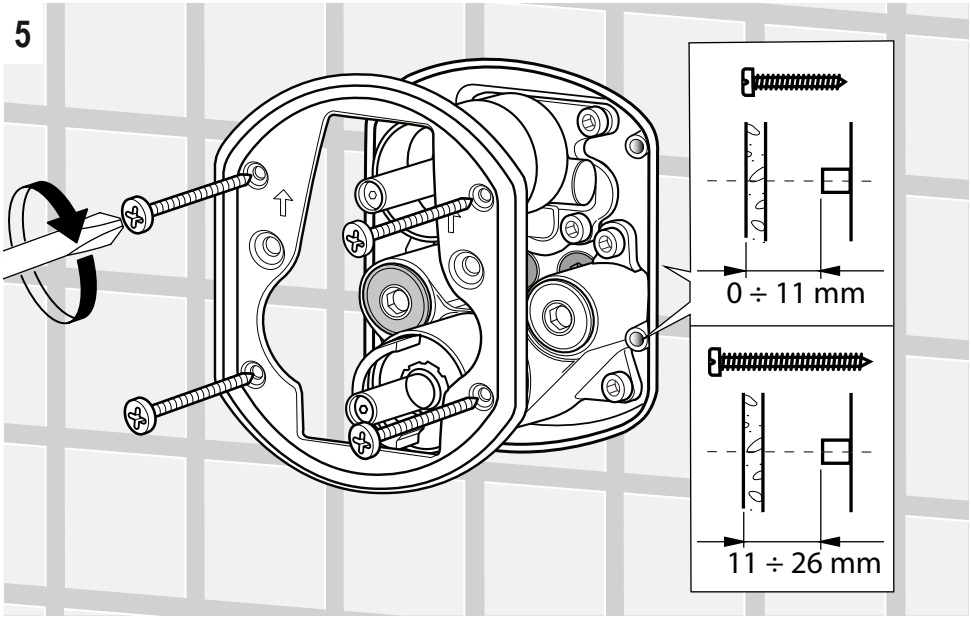

6A

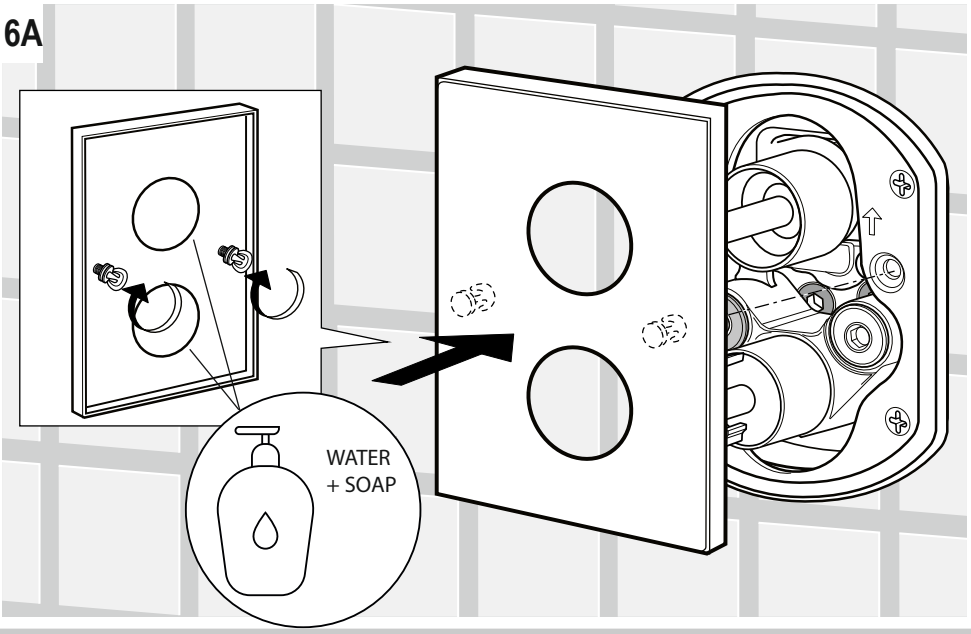

INSTALLATION

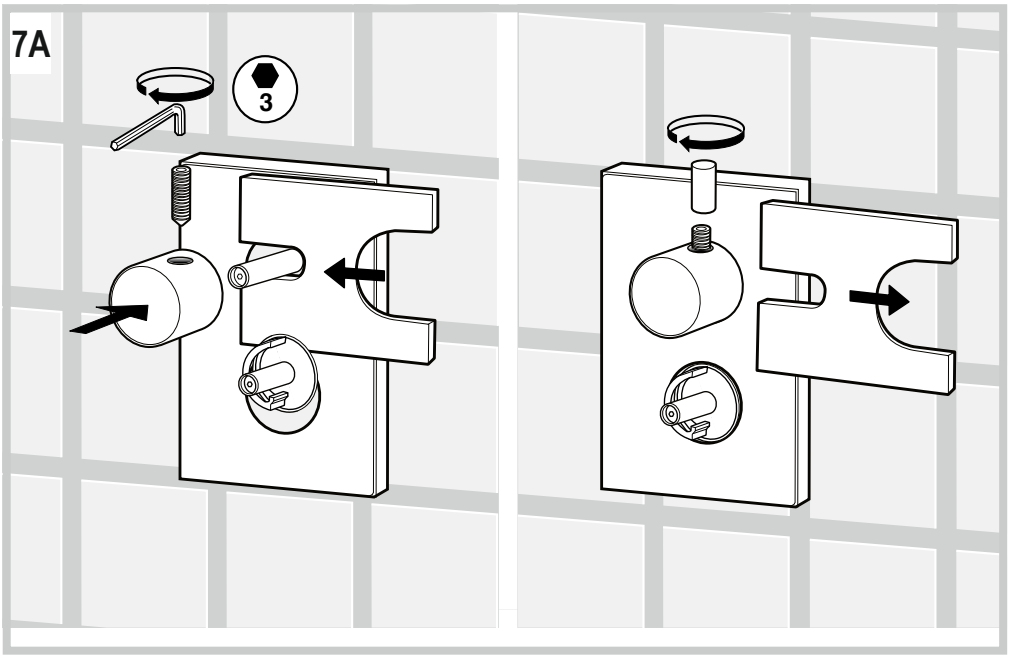

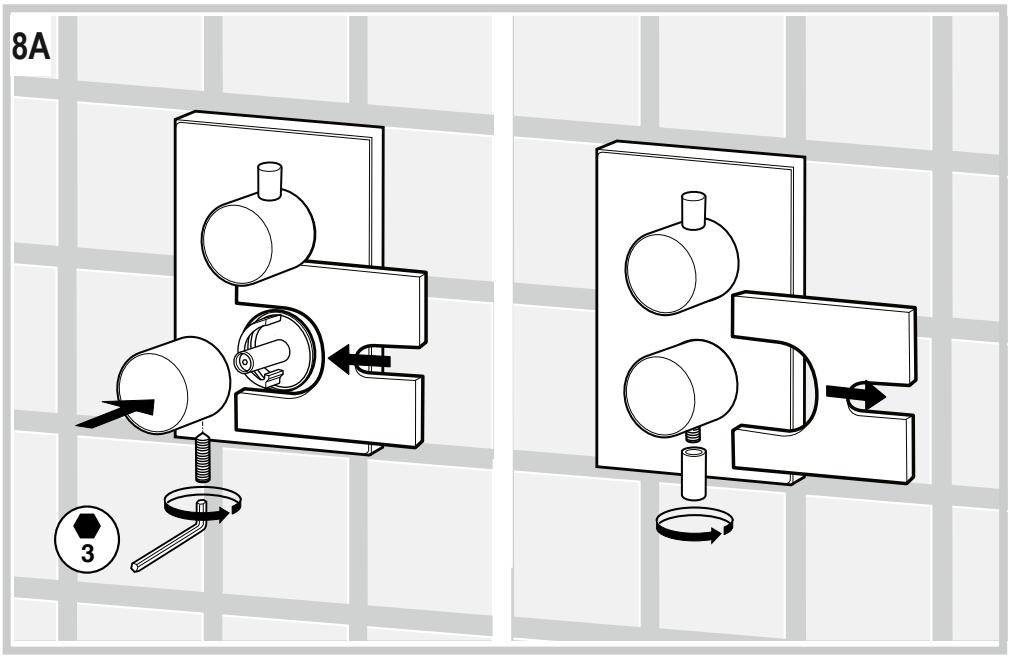

INSTALLATION

5

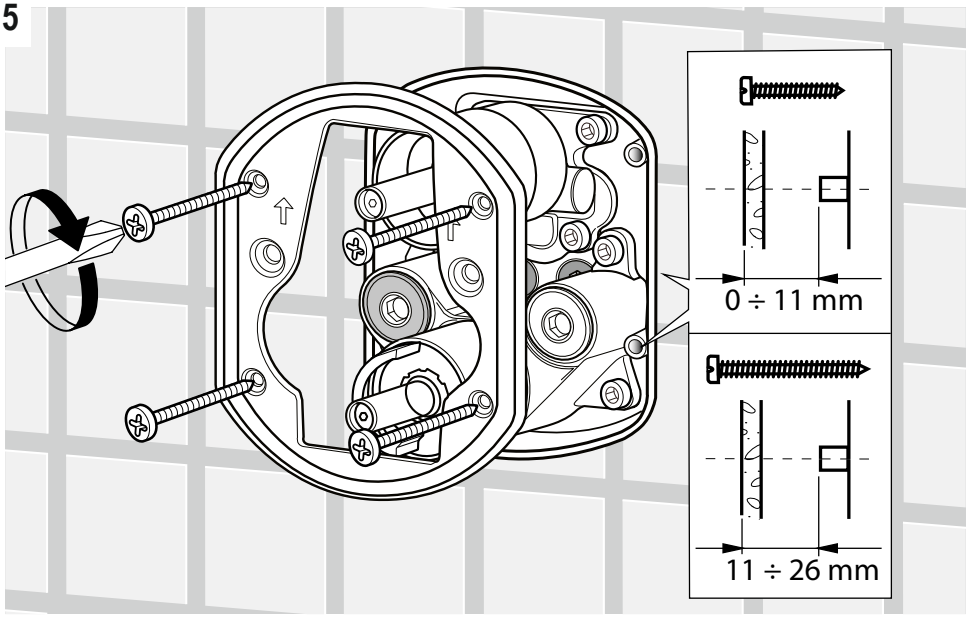

6B

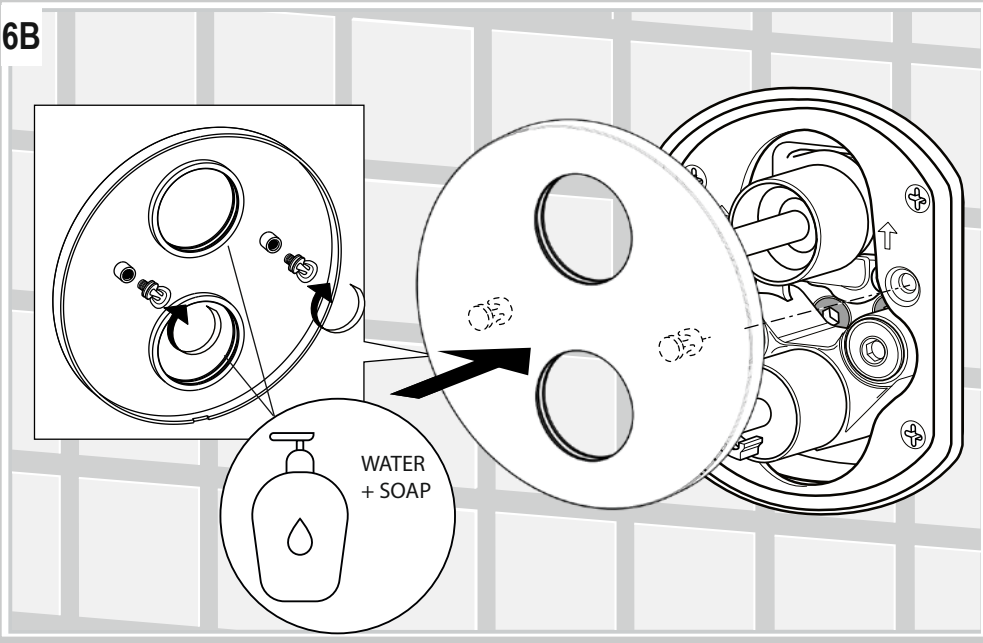

INSTALLATION

7B

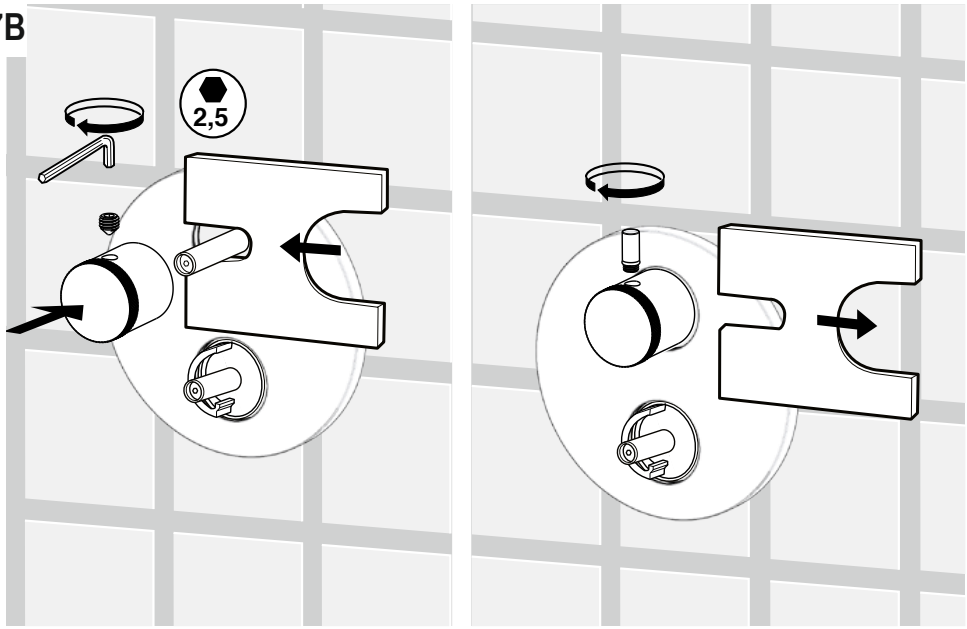

8B

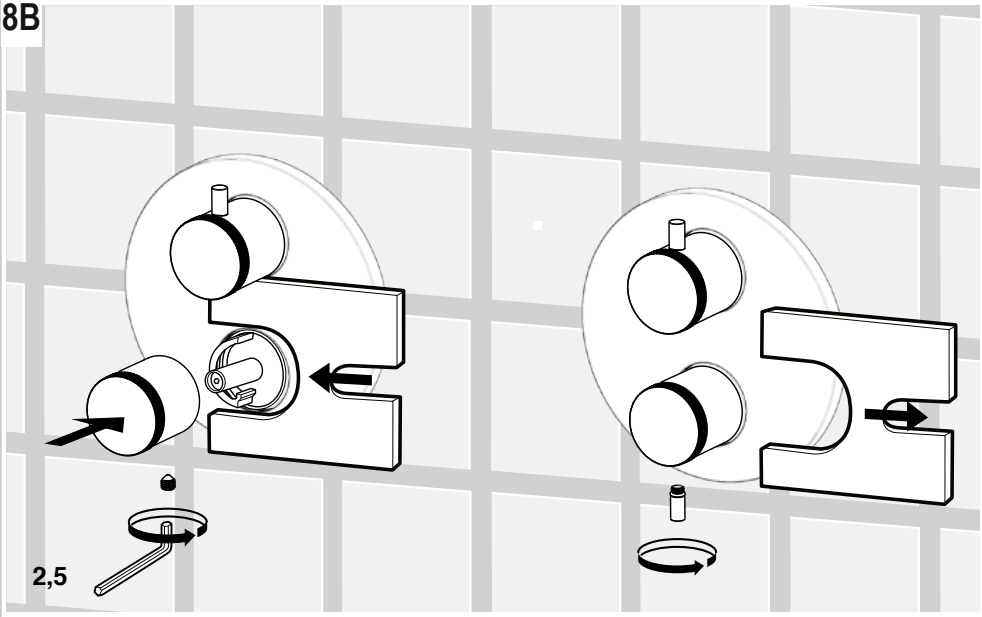

INSTALLATION

5

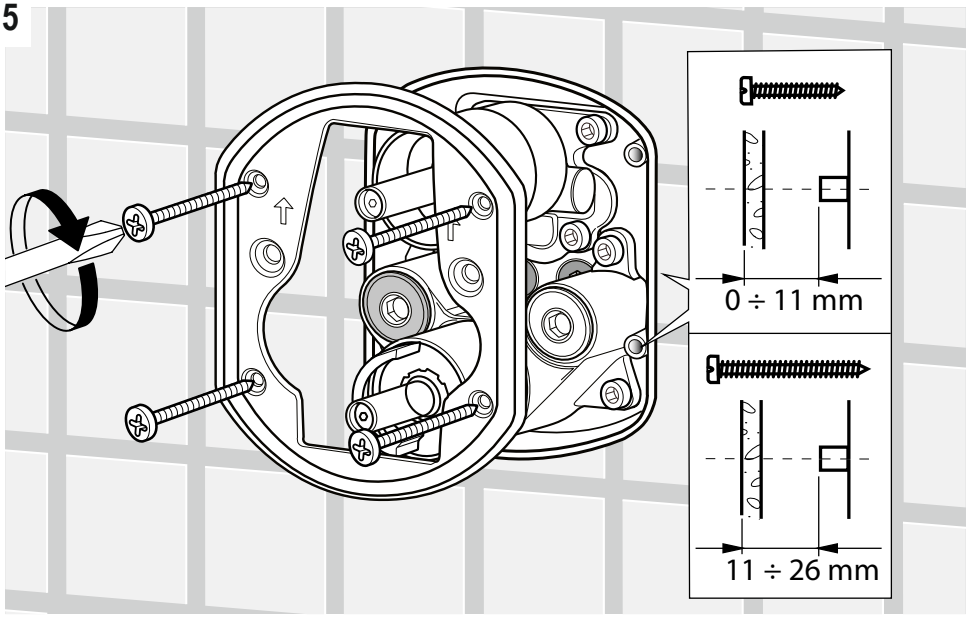

6C

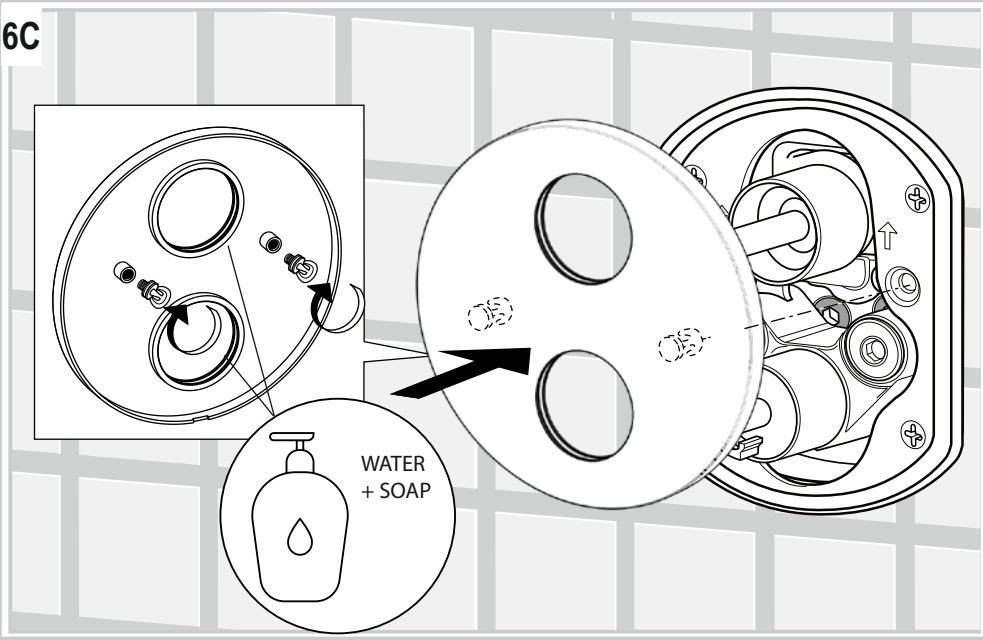

INSTALLATION

7C

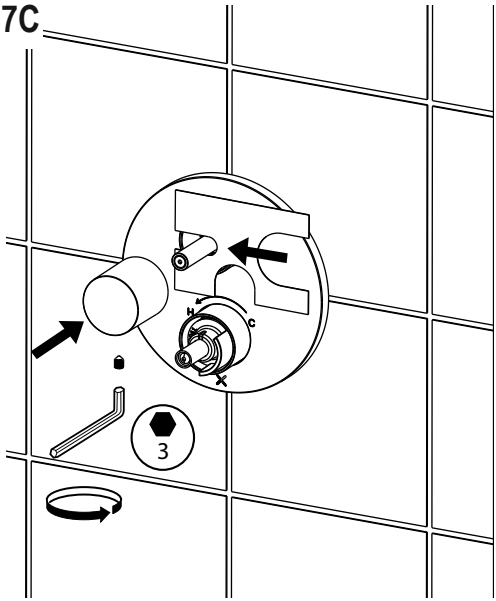

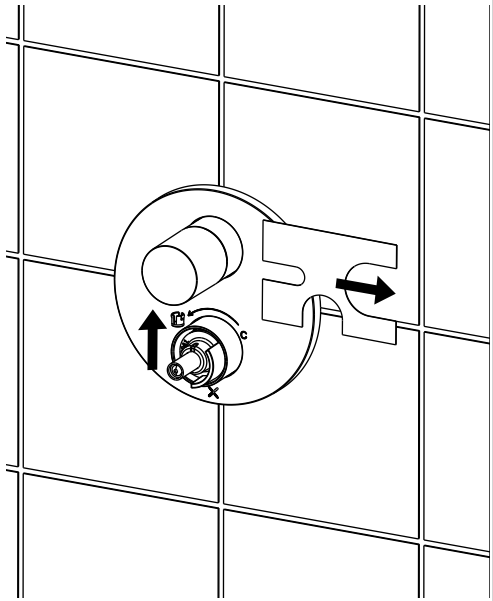

8C

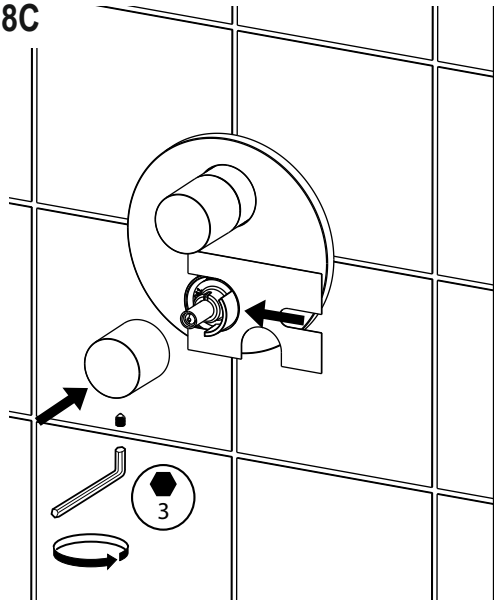

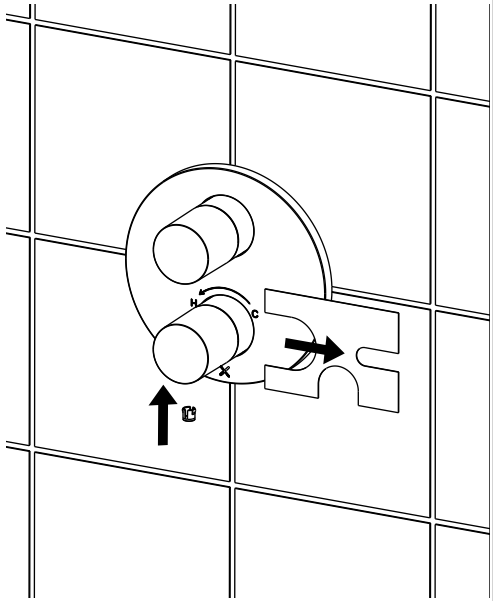

5

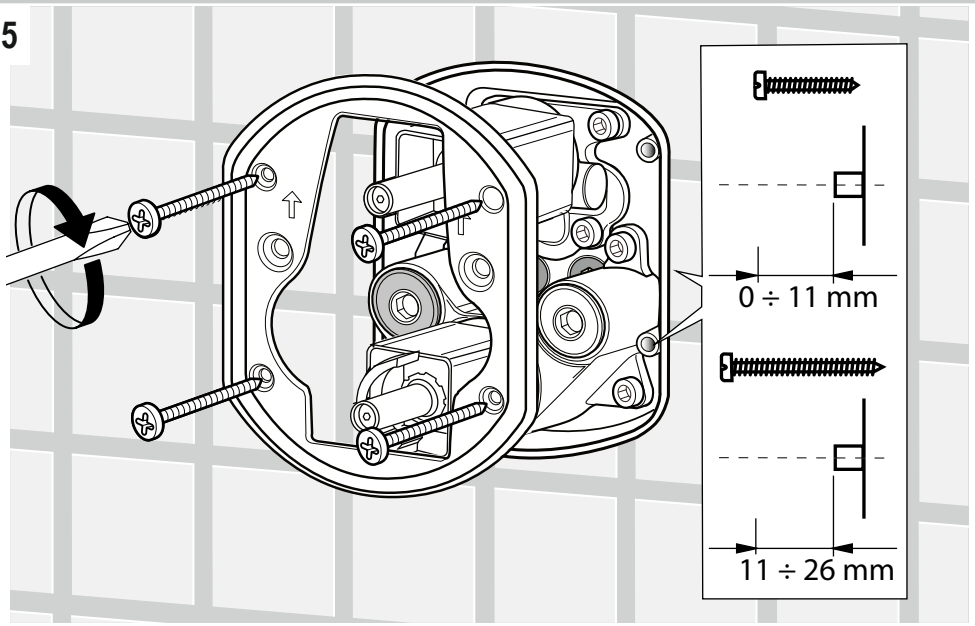

6D

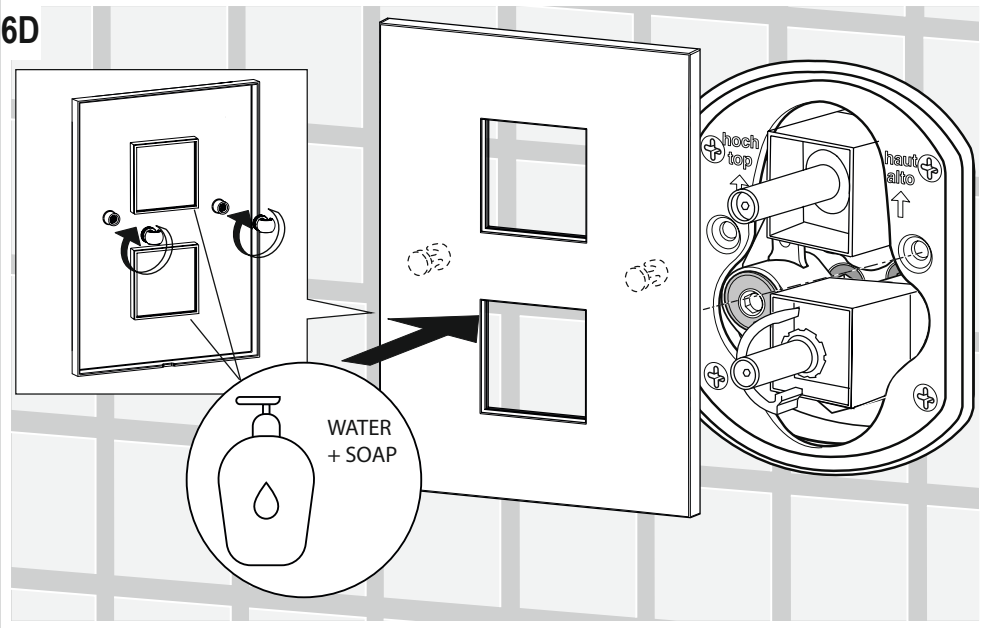

INSTALLATION



7D

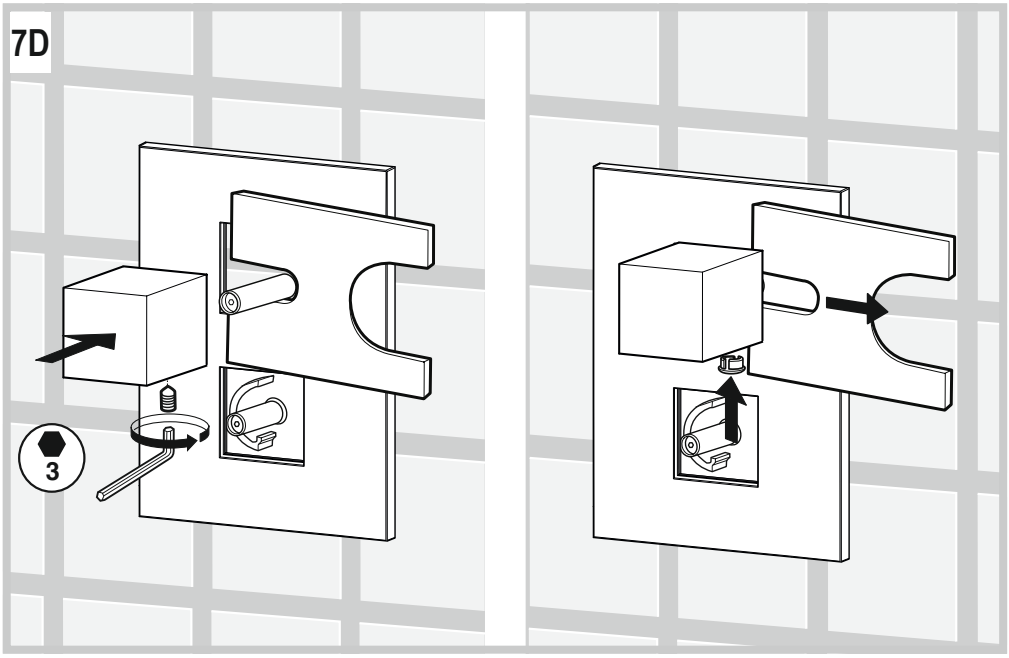

8D

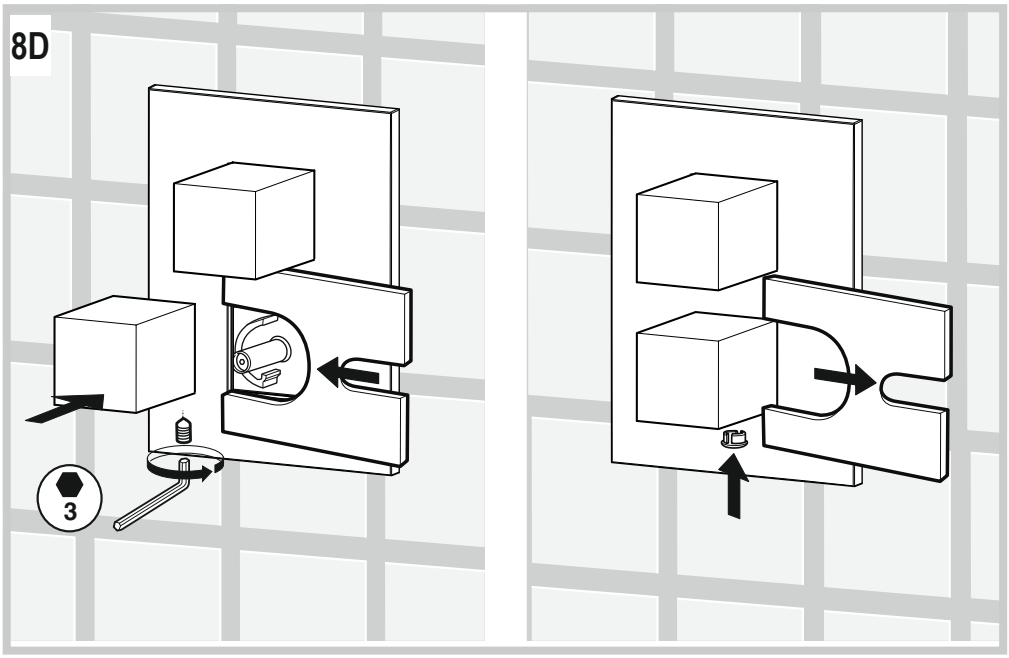

5

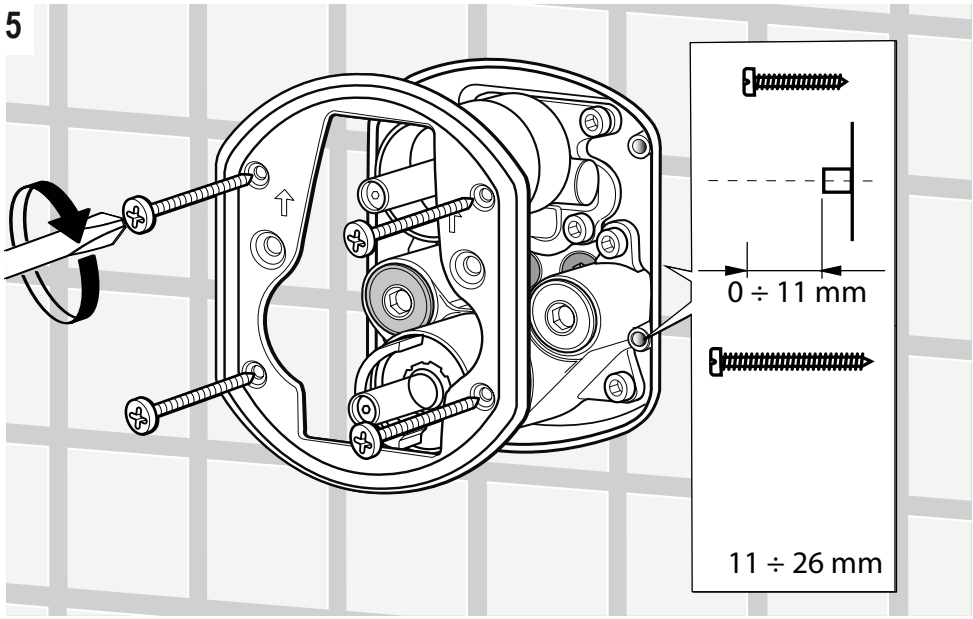

6E

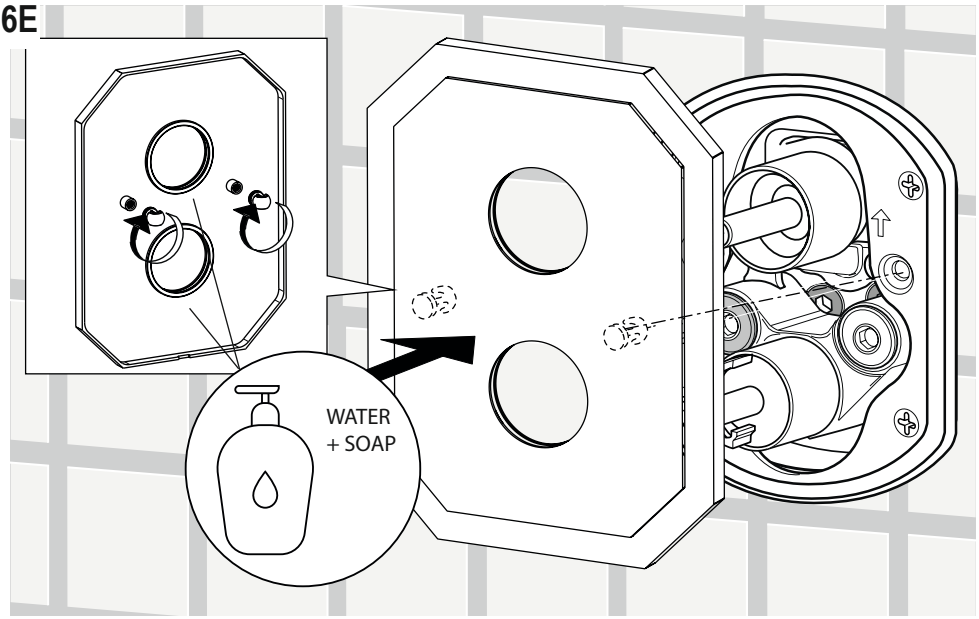

INSTALLATION

7E

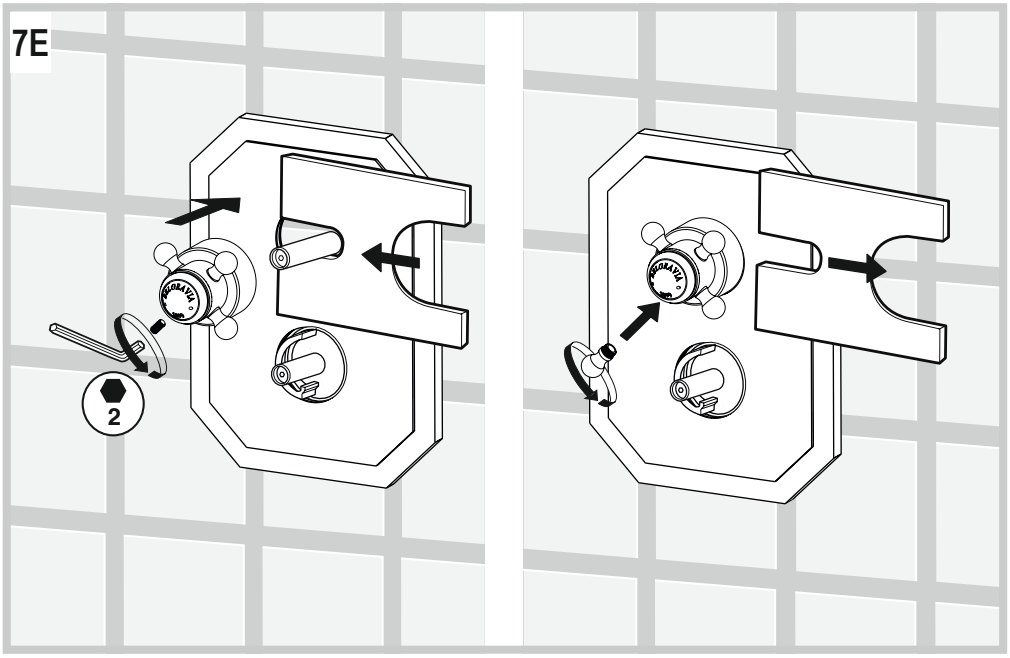

8E

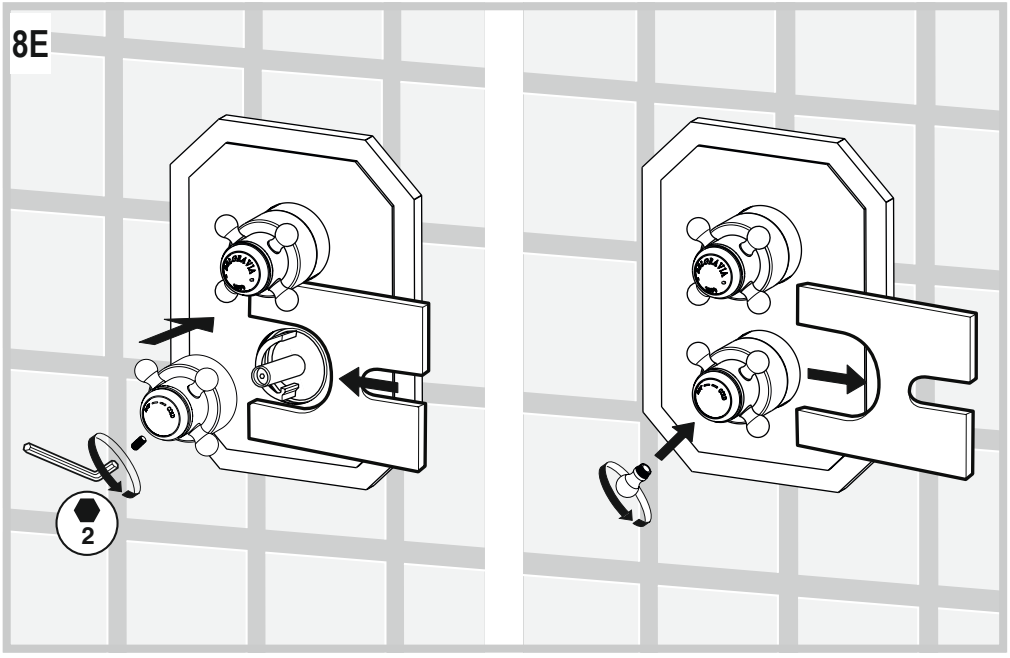

5

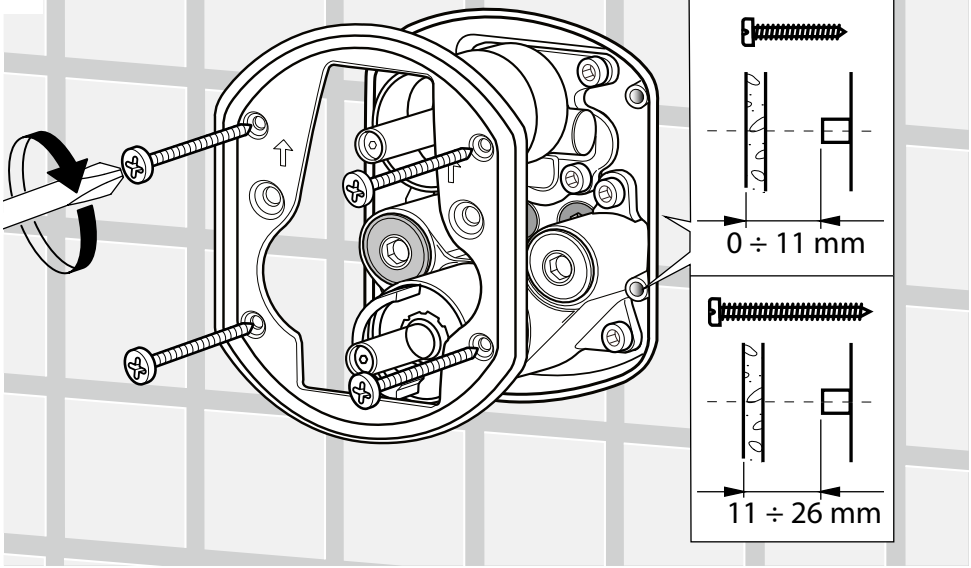

6F

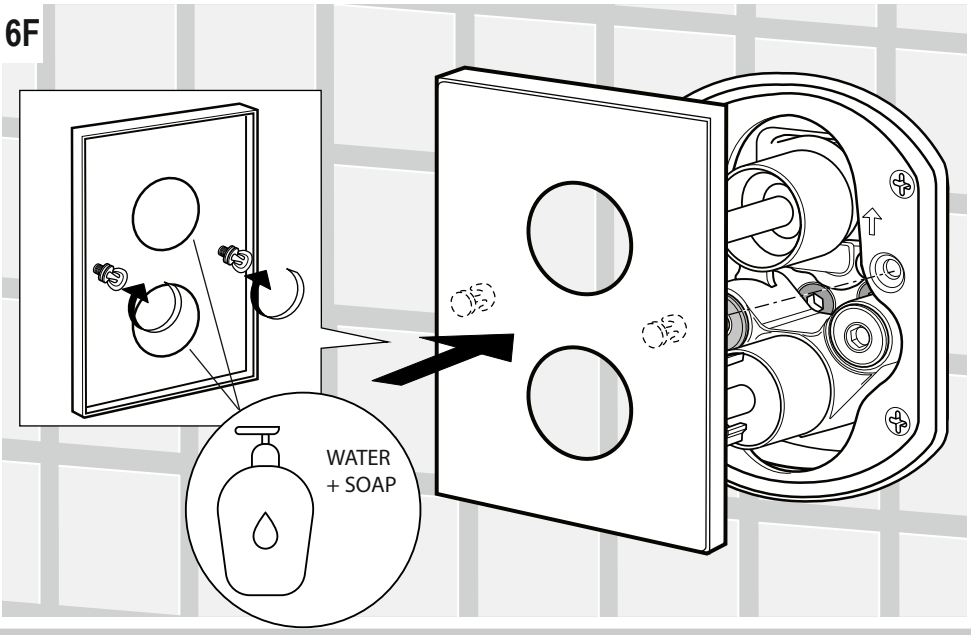

INSTALLATION

7F

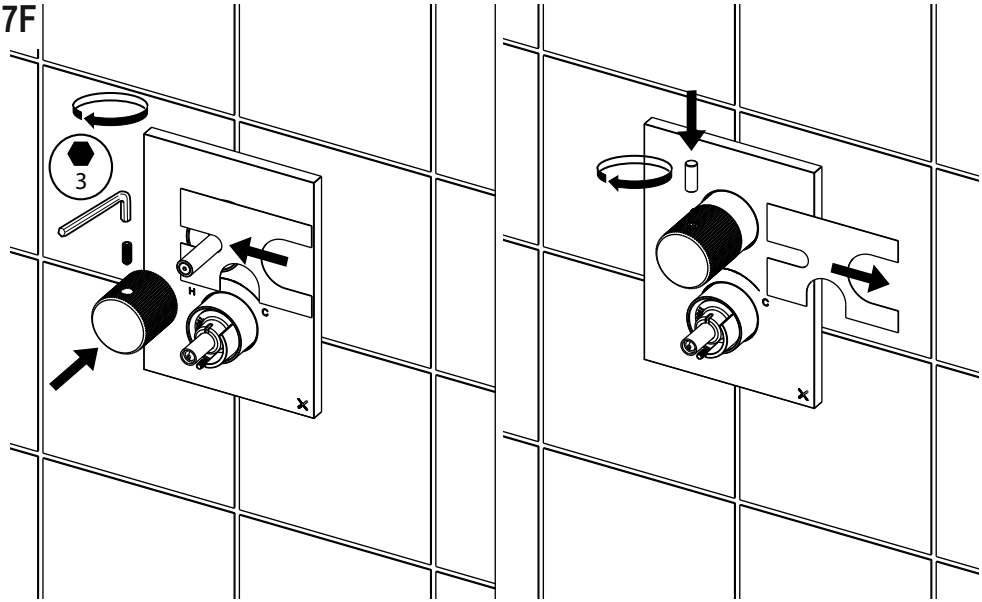

8F

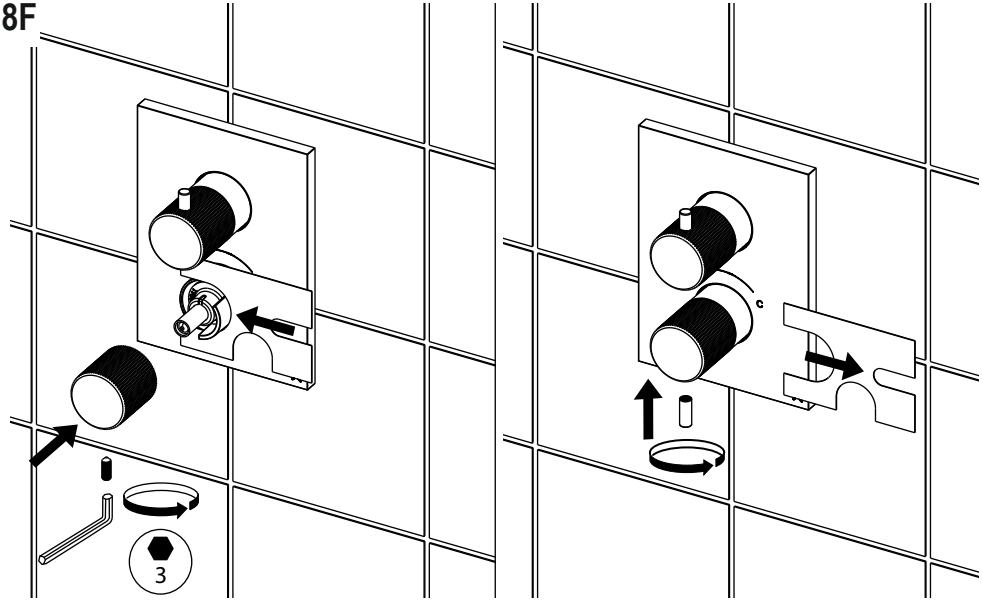

5

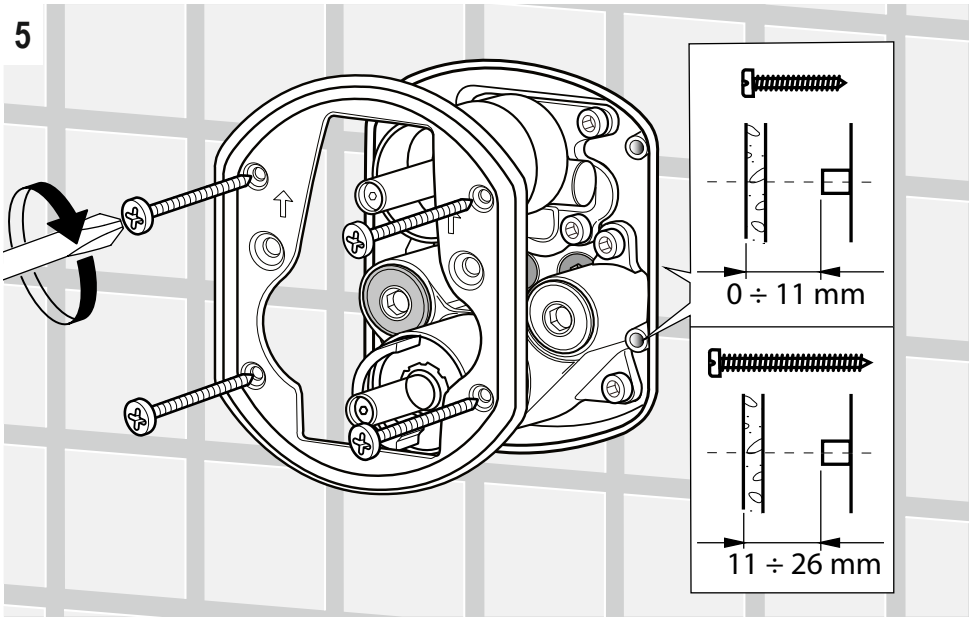

6G

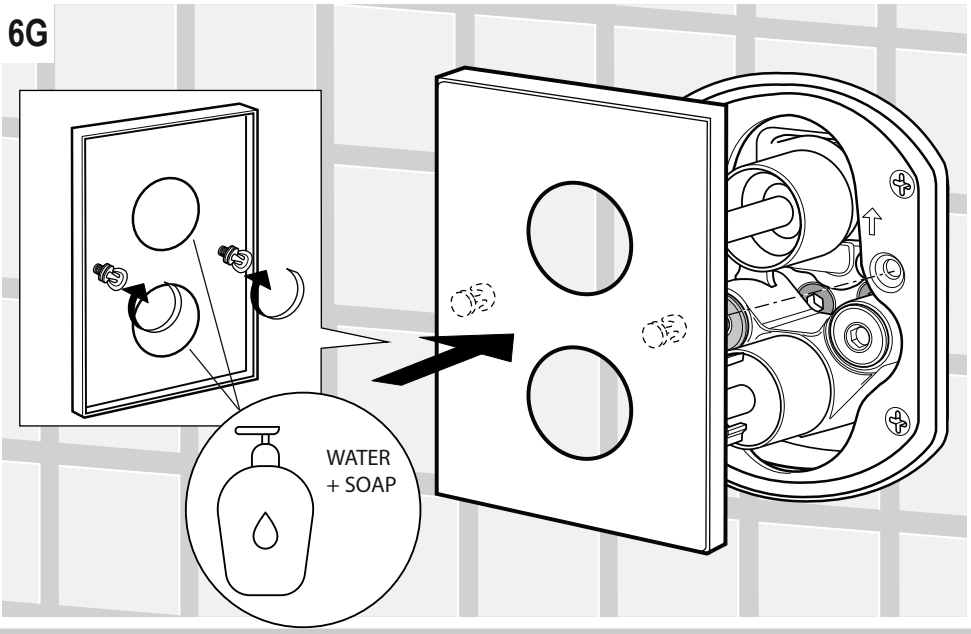

INSTALLATION

7G

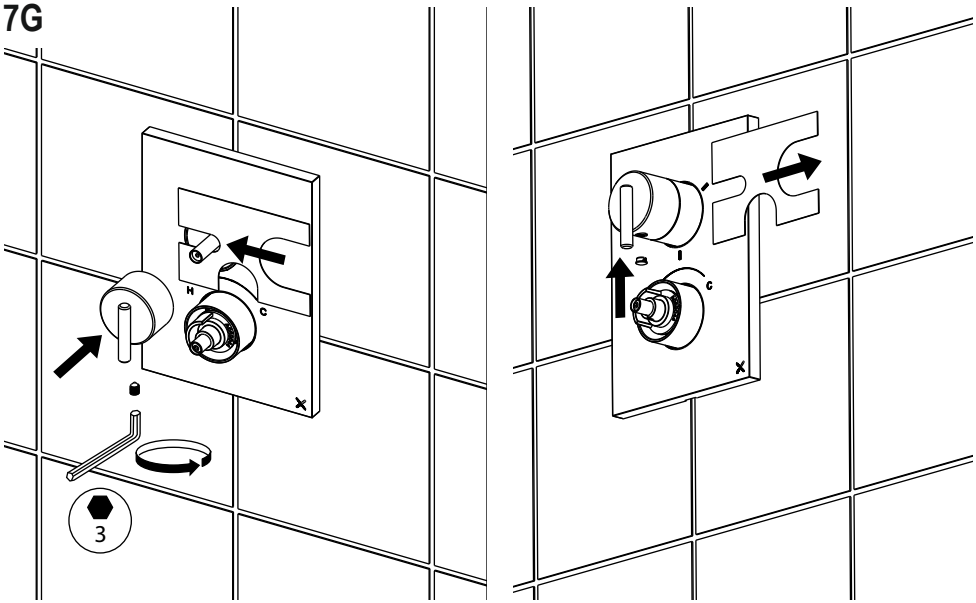

8G

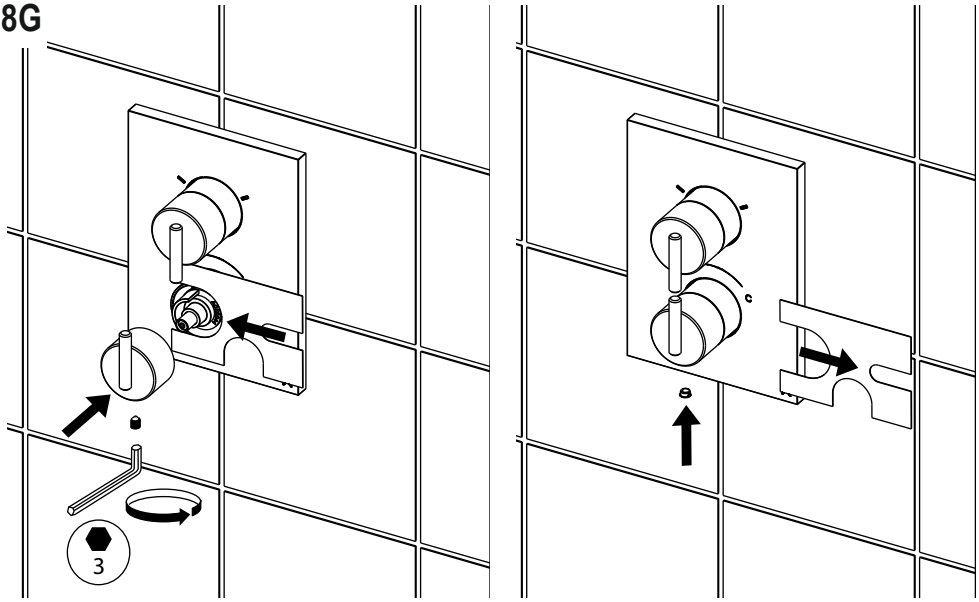

MAINTENANCE

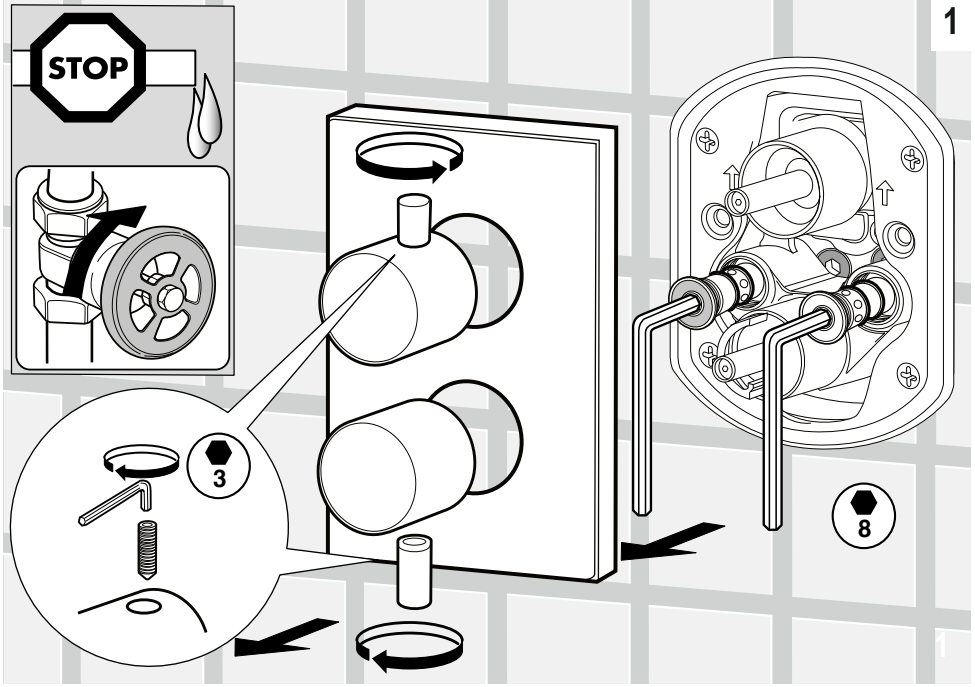

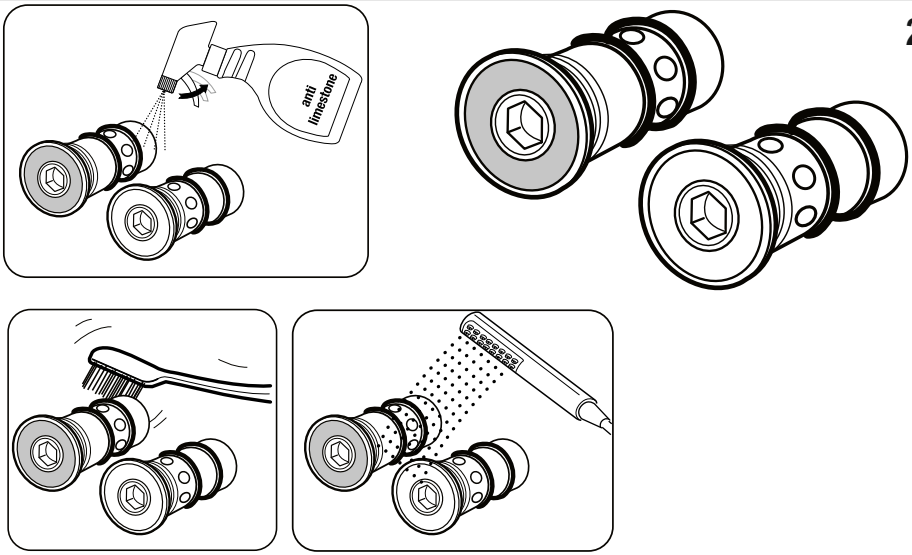

MAINTENANCE



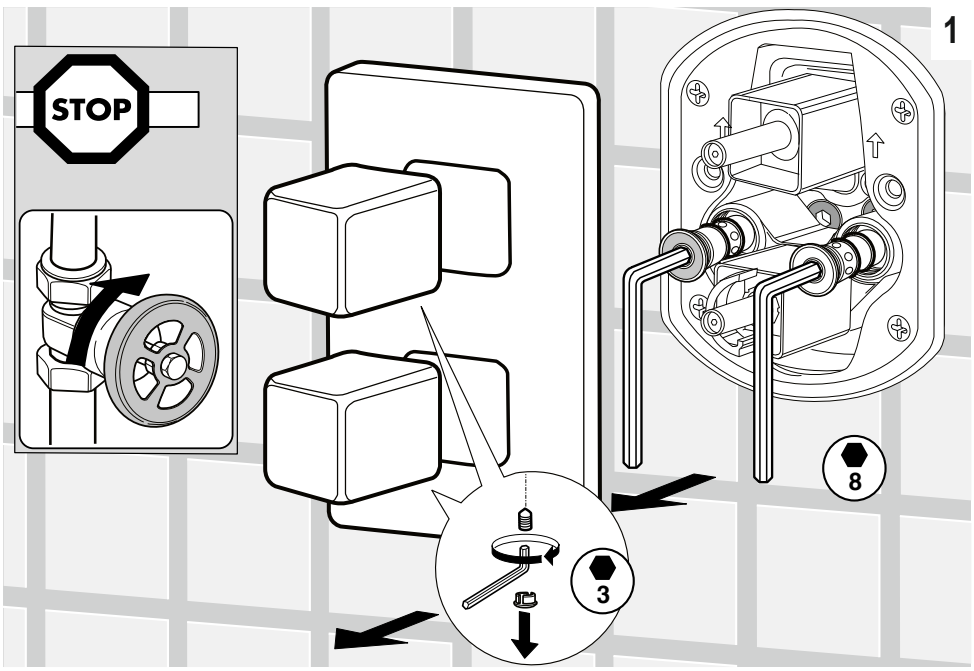

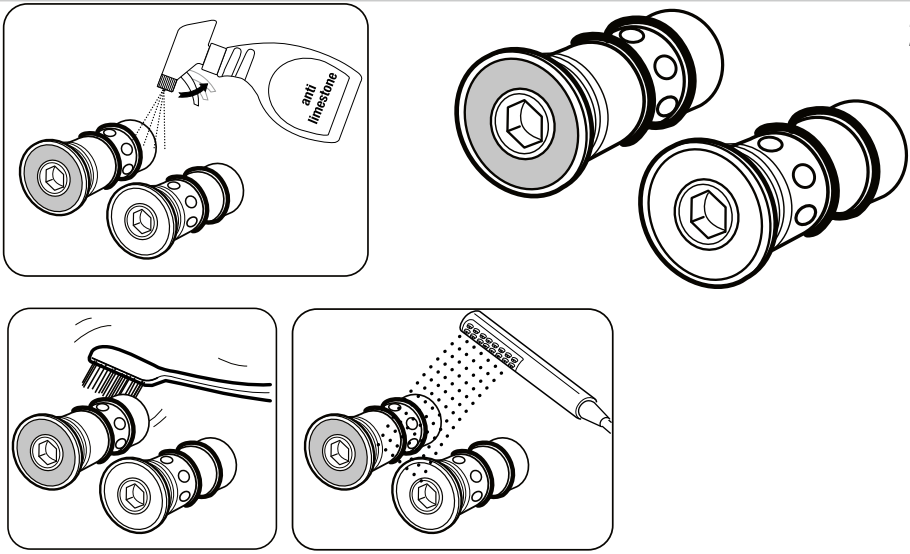

MAINTENANCE

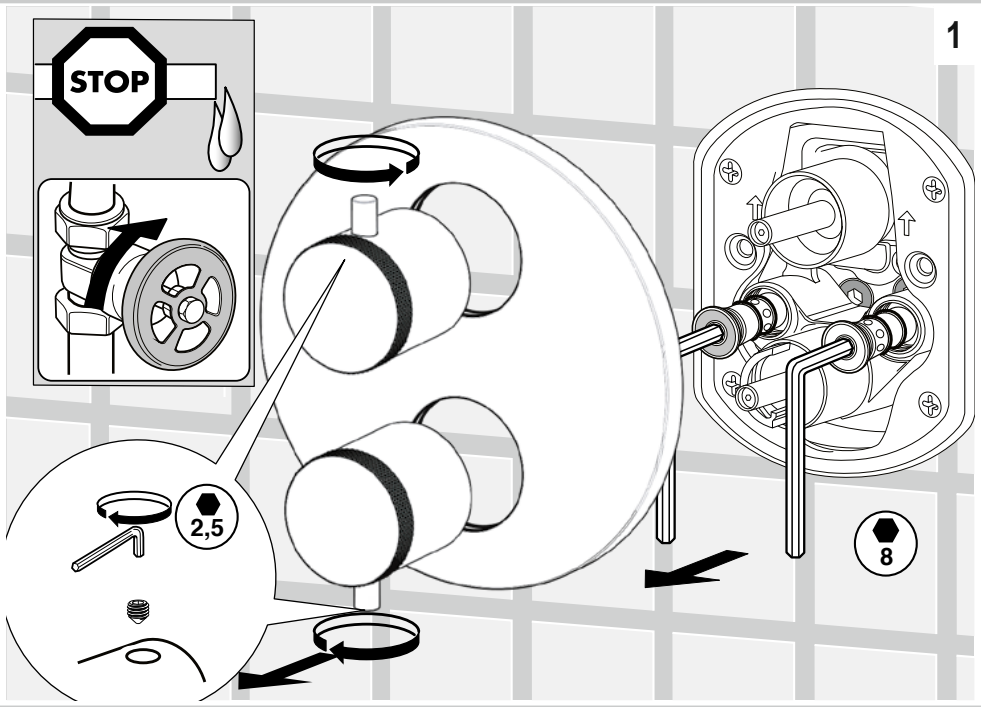

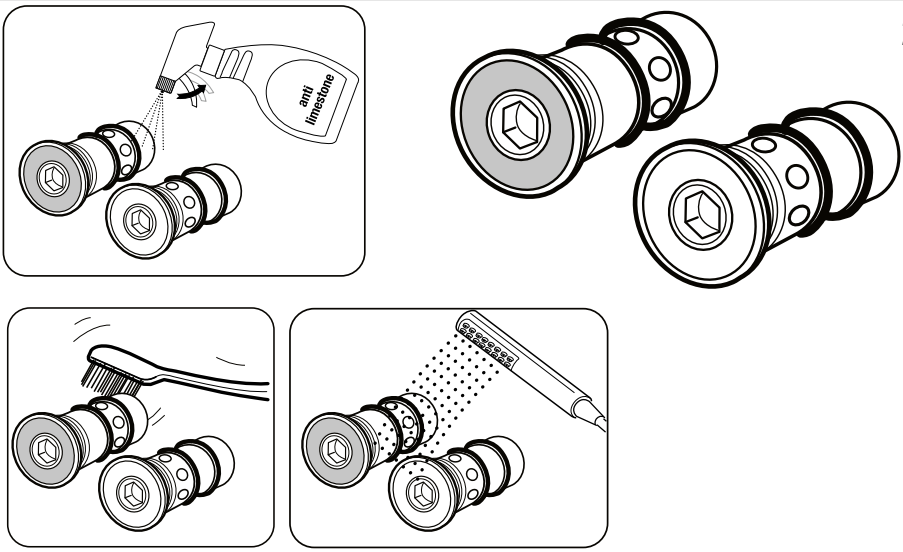

MAINTENANCE

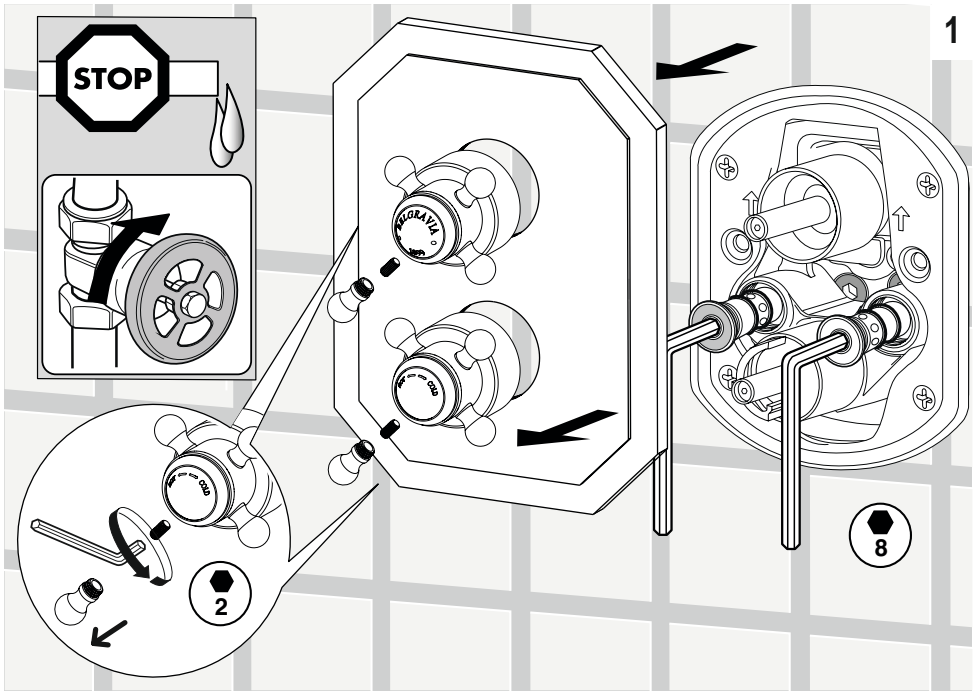

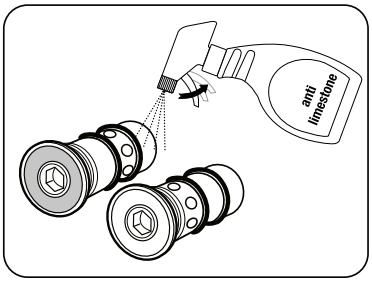

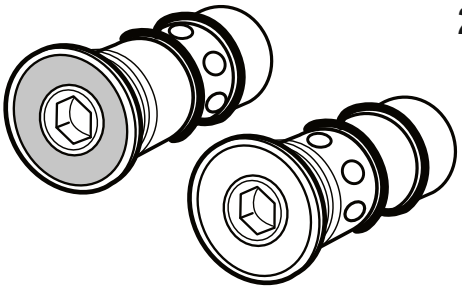





THERMOSTATIC 1 WAY

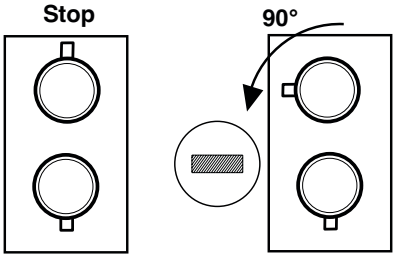

THERMOSTATIC 2 WAYS

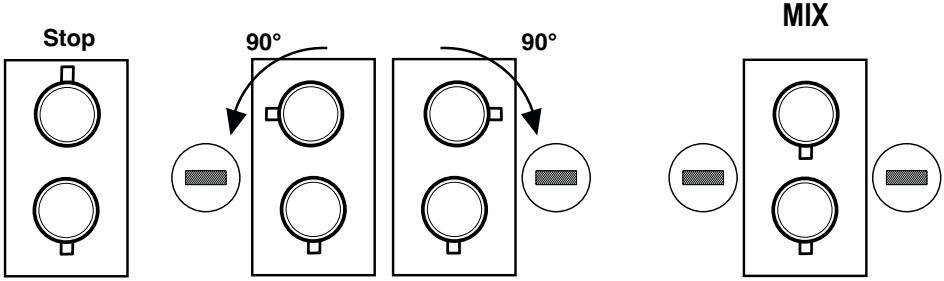

THERMOSTATIC 3 WAYS

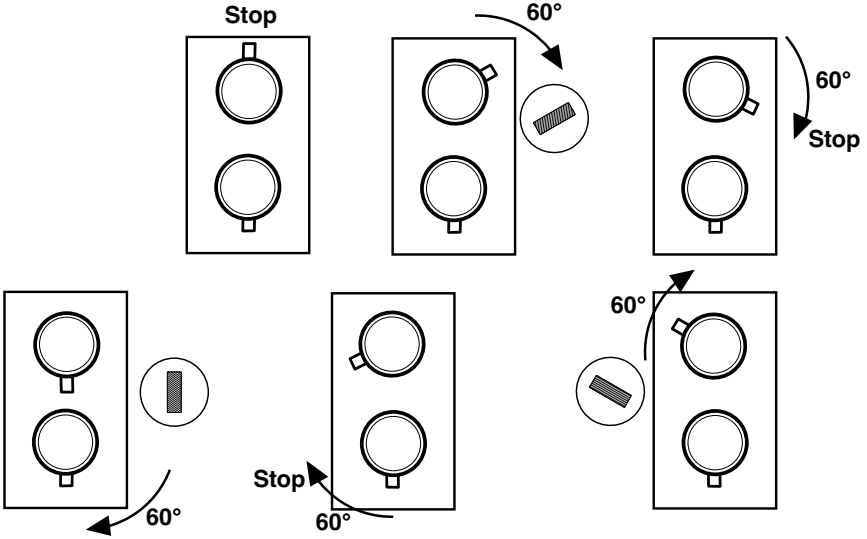

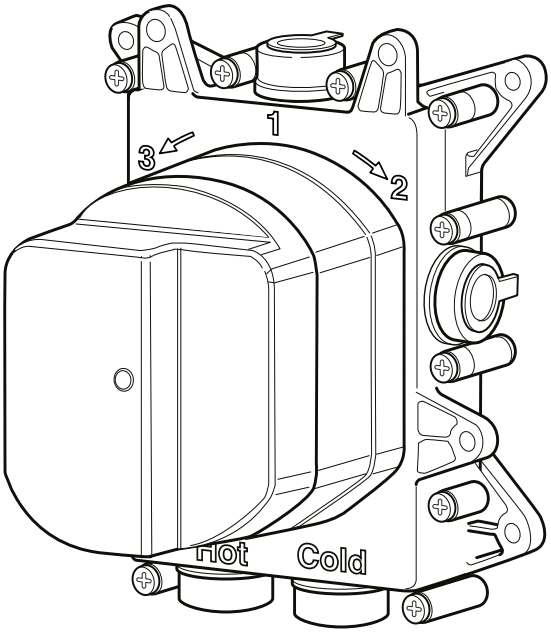

Concealed Box

Mounting Instructions

1 PACKAGE CONTENT

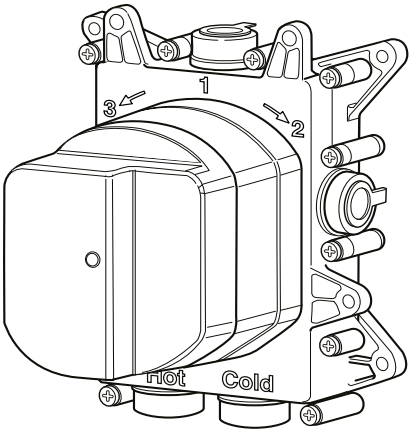

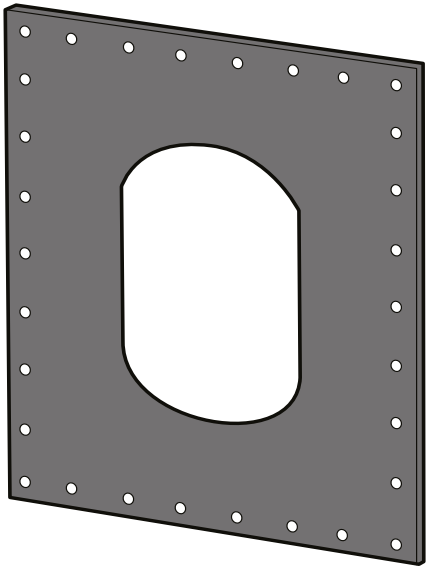







Mounting instructions



2 TECHNICAL FEATURES

Pressure range min/max 0,5/5 bar
(in case of water pressure highter than 5 bar weeracommend installing pressure reducers).
Recommended pressure 3 bar.

Operation:
Either with gas or electric accumulation boilers.
Centralised systems.

Safety lock at:	41° C
Min. Working temperature:	3° C
Min. recommended:	15° C
Max. Working temperature:	70° C
Max. recommended:	65° C
Recommended thermal differential	50° C

Thermal disinfection is allowed.

Safety system with flow stop in case of lack of one of the two waters.

Warning: contact the plumber for the choice of the best water heating device.

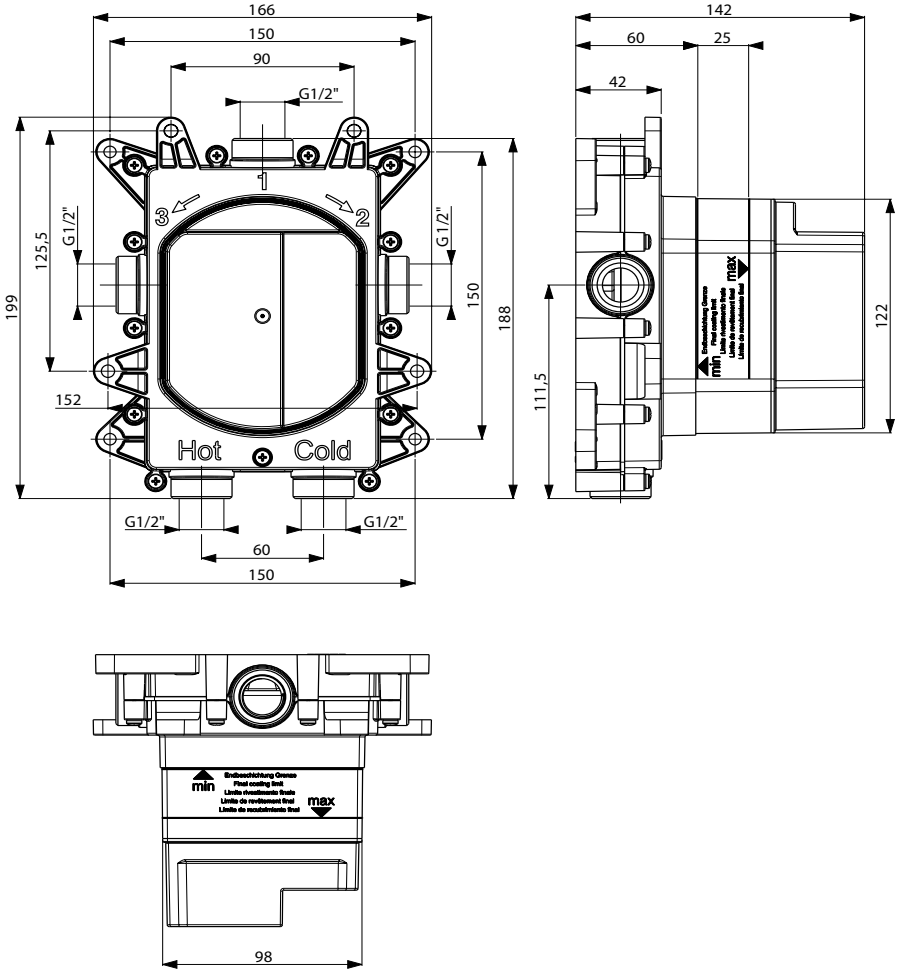
166
150
90
G1/2"
1
3
2
G1/2"
G1/2"
125,5
199
150
188
152
Hot
Cold
G1/2"
G1/2"
60
150
142
60
25
42
111,5
122
min
max
98

Press.	FLOW RATE (L/min)			
	Push button 2 ways			
	 Exit 1		 Exit 2	
bar	min.	max.	min.	max.
0,5	1,5	7,5	1,5	7,5
1	2,3	11,3	2,3	11,2
2	3,5	16,5	3,5	16
3	4,5	20,5	4,5	20
4	5,5	23,7	5,2	22,8
5	5,7	26,5	5,7	25,5

Press.	FLOW RATE (L/min)					
	Push button 3 ways					
	 Exit 1		 Exit 2		 Exit 3	
bar	min.	max.	min.	max.	min.	max.
0,5	1,8	8,1	1,8	7,7	1,8	7,7
1	2,7	11,8	2,6	11,5	2,6	11,5
2	3,9	16,8	3,9	16,7	3,9	16,7
3	4,8	20,7	4,8	20,5	4,8	20,5
4	5,5	24	5,5	23,7	5,5	23,7
5	6,2	26,7	6,2	26,6	6,2	26,6

2 WAYS - ONLY PUSH VERSION

ATTENTION:
indications valid only for PUSH VERSION!

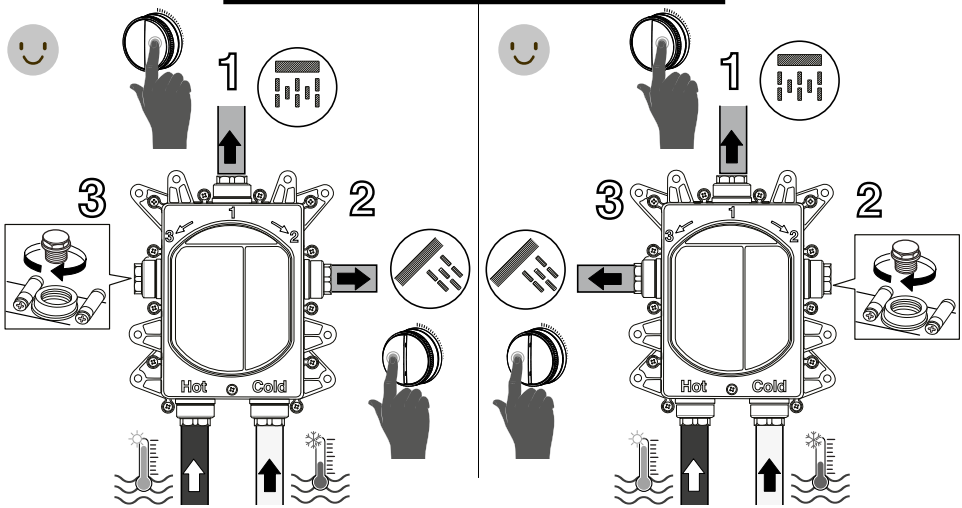

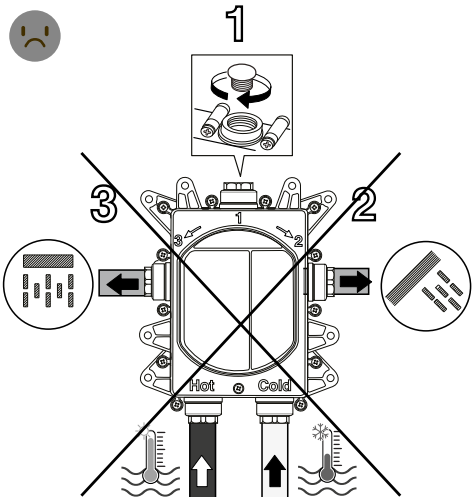

3 WAYS - ONLY PUSH VERSION

ATTENTION:
indications valid only for PUSH VERSION!

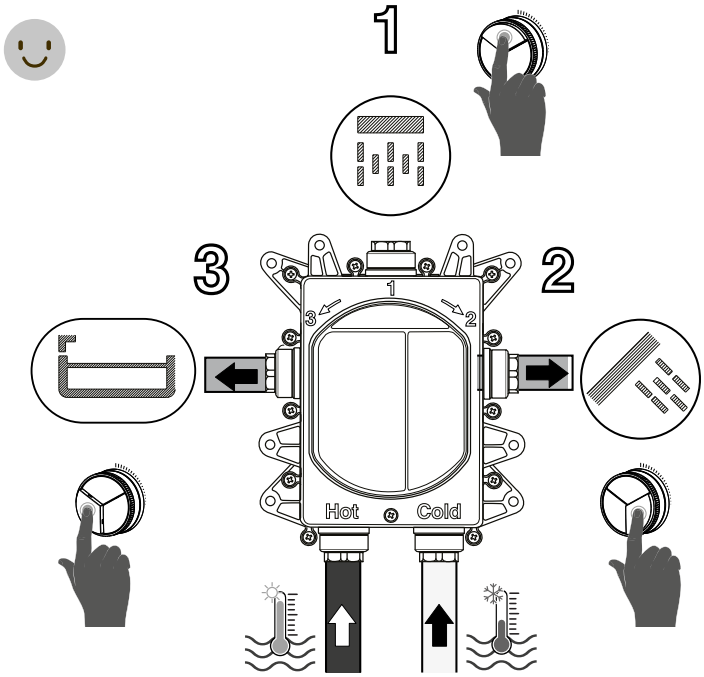

Press.	FLOW RATE (L/min)			
	Term. 1 way	Term. 2 way		
				
bar	Exit 1/2/3	Exit 2	Exit 3	Mix
0,5	8,2	8,2	8,2	9,2
1	11,7	11,7	11,7	13,2
2	16,7	16,4	16,4	18,7
3	20,7	20	20	22,9
4	24	23	23	26,4
5	26,6	25,8	25,8	29,5

Press.	FLOW RATE (L/min)		
	Term. 3 ways		
			
bar	Exit 1	Exit 2	Exit 3
0,5	9,4	8,1	8,1
1	13,4	11,6	11,6
2	19,2	16,6	16,6
3	23,7	20,5	20,5
4	27,4	23,8	23,8
5	30,5	26,6	26,6



ATTENTION:
indications valid only for OTHER VERSIONS!

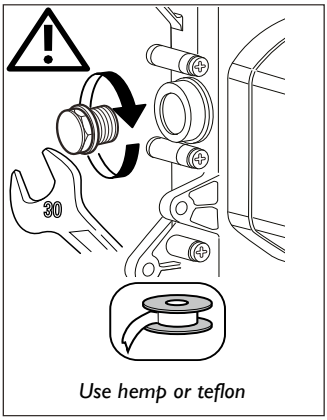

Use hemp or teflon

I way

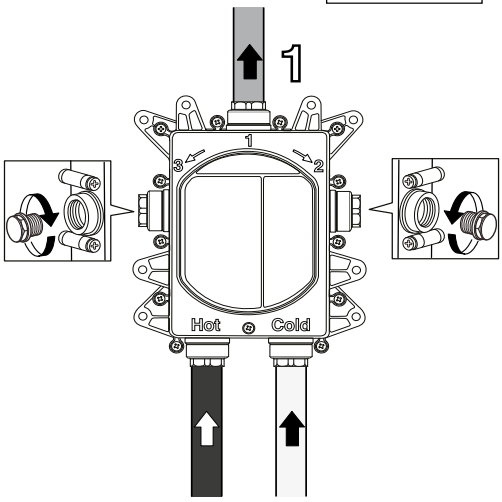

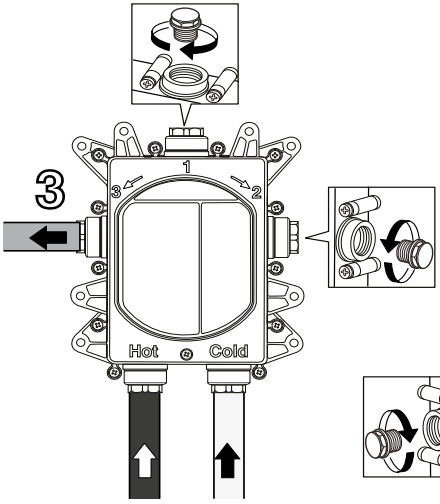

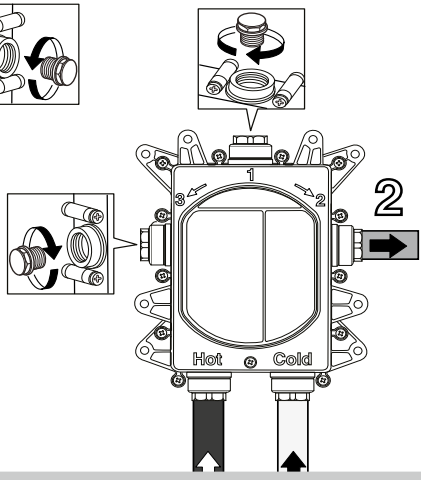

PRE-INSTALLATION INFORMATIONS



ATTENTION:
indications valid only for OTHER VERSIONS!

2 ways

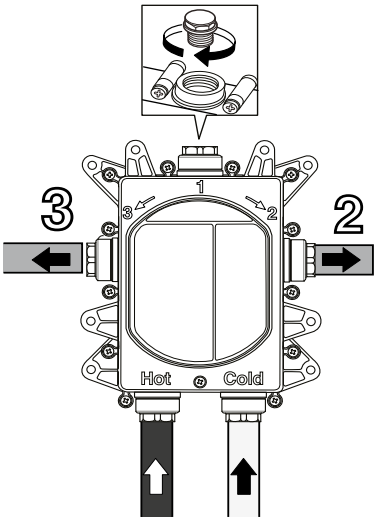

3 ways

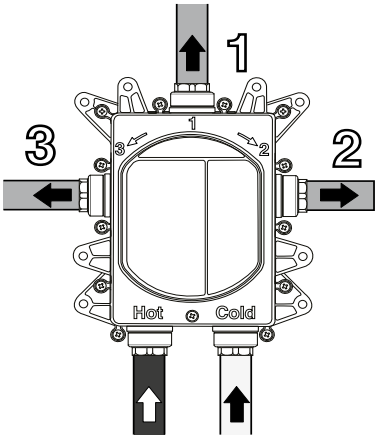

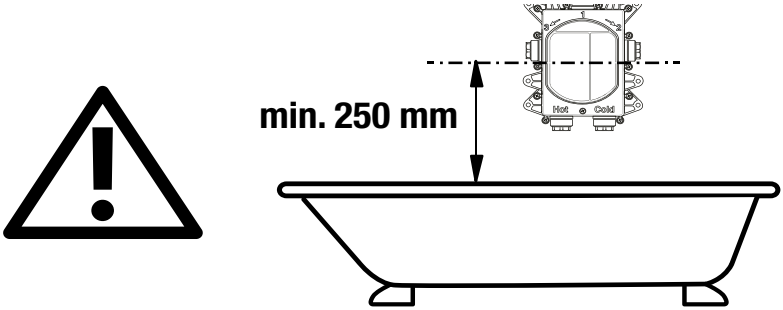
min. 250 mm
Hot
Cold

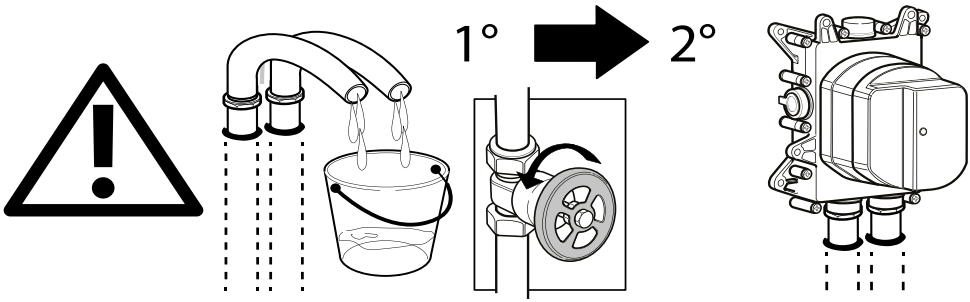
1°
2°

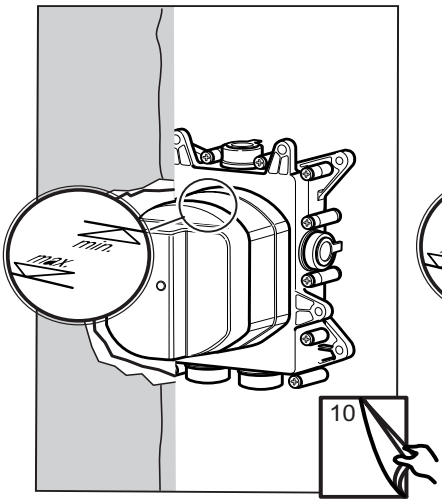

Mounting on plasterboard wall

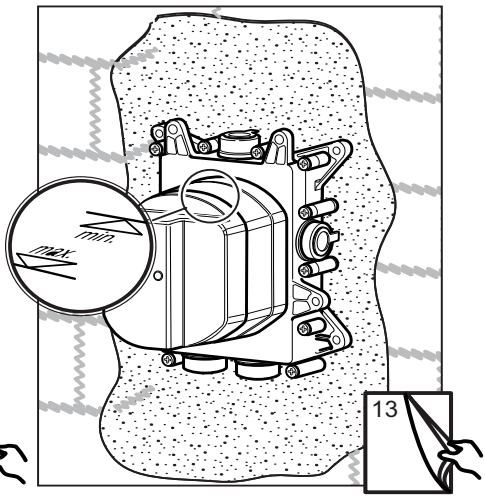

Wall mounting

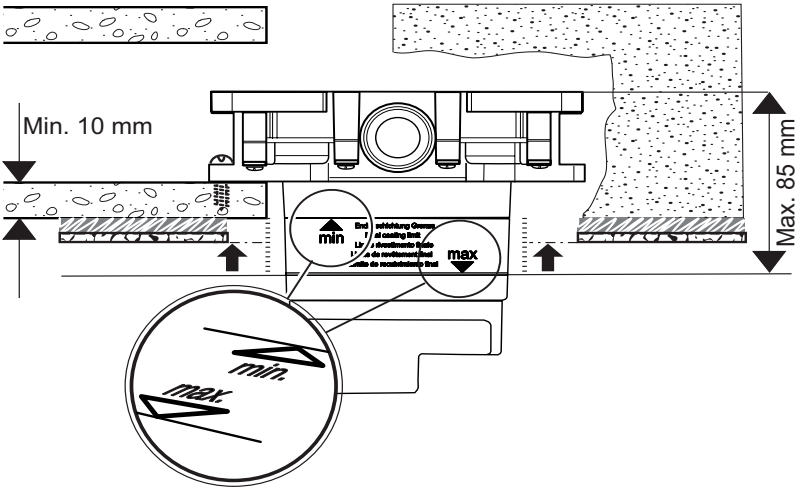

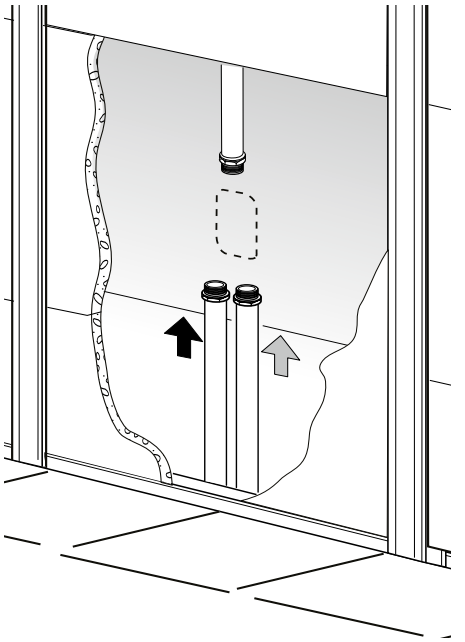

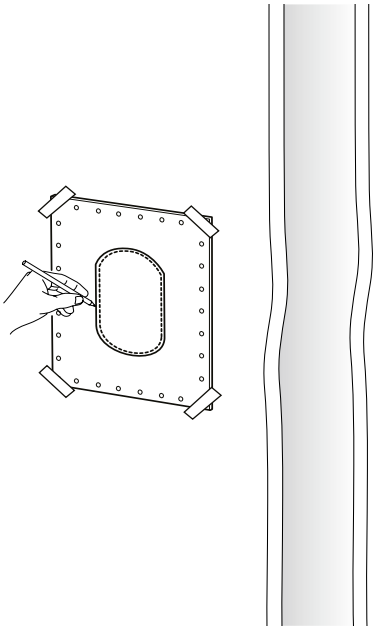

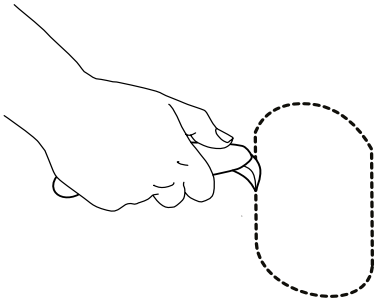

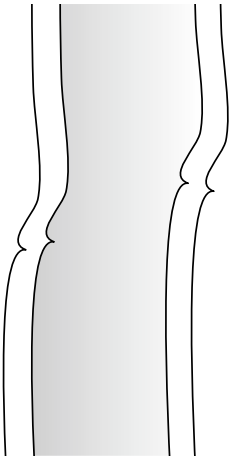

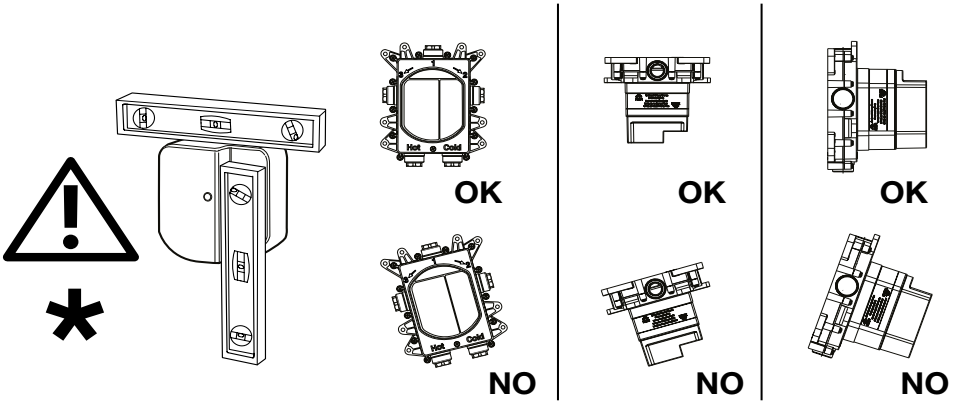
Hot
Cold
OK
NO
OK
NO
OK
NO

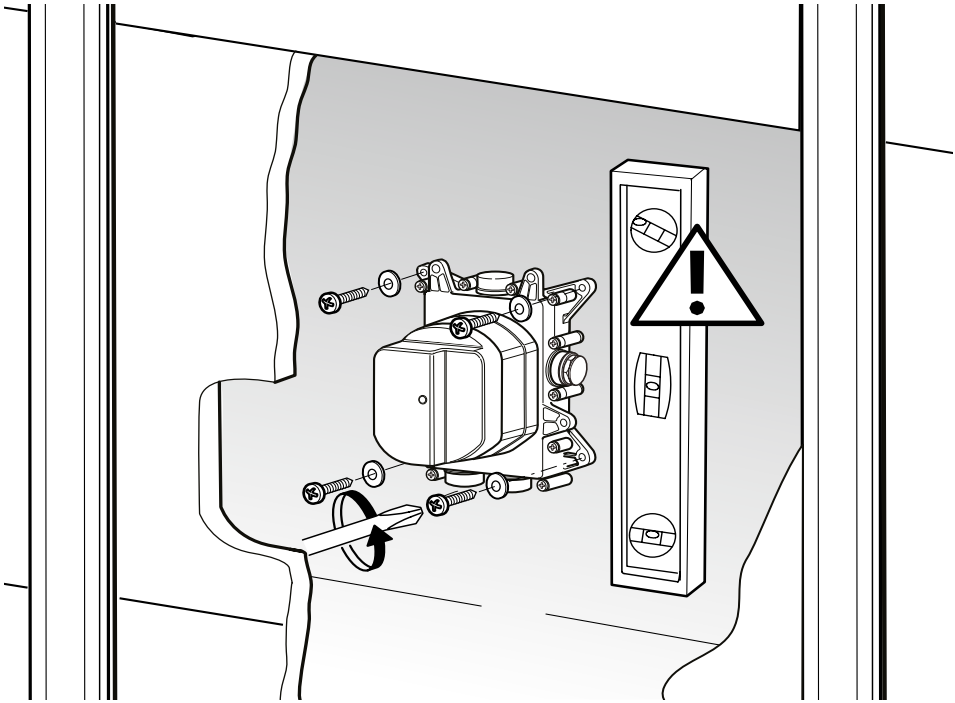

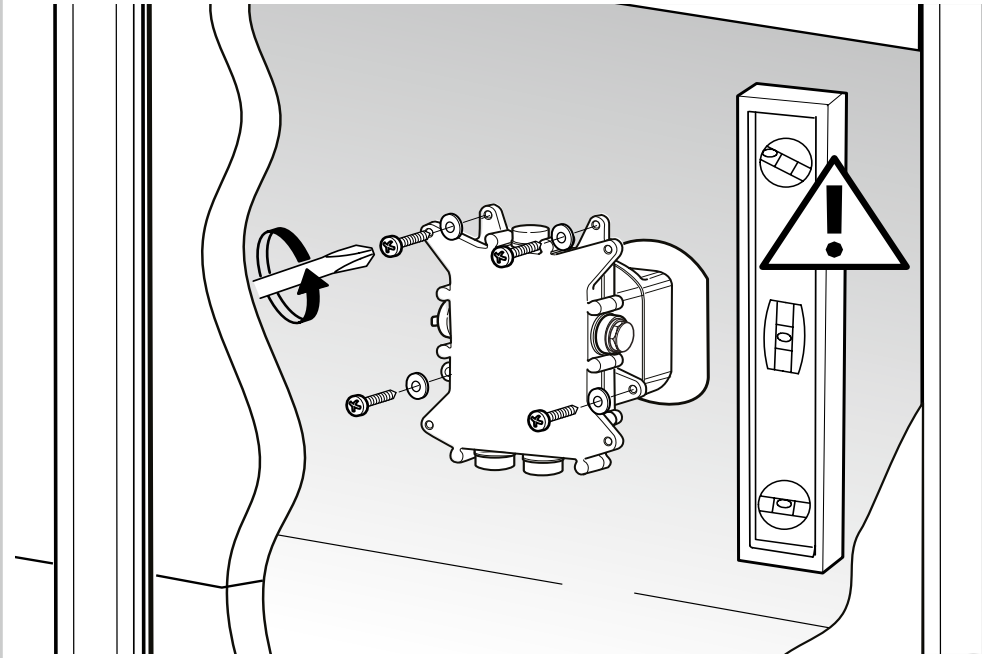

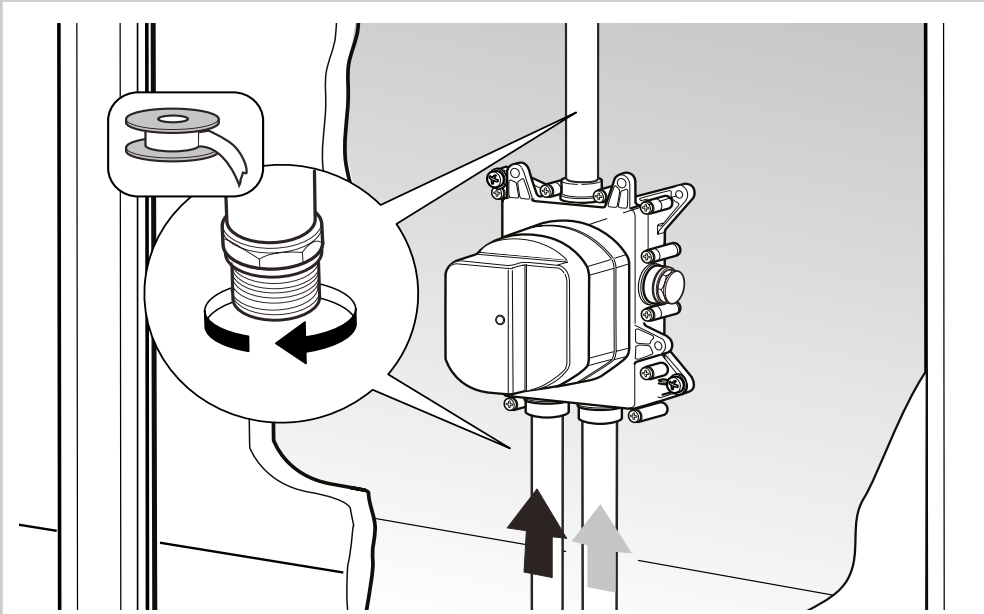

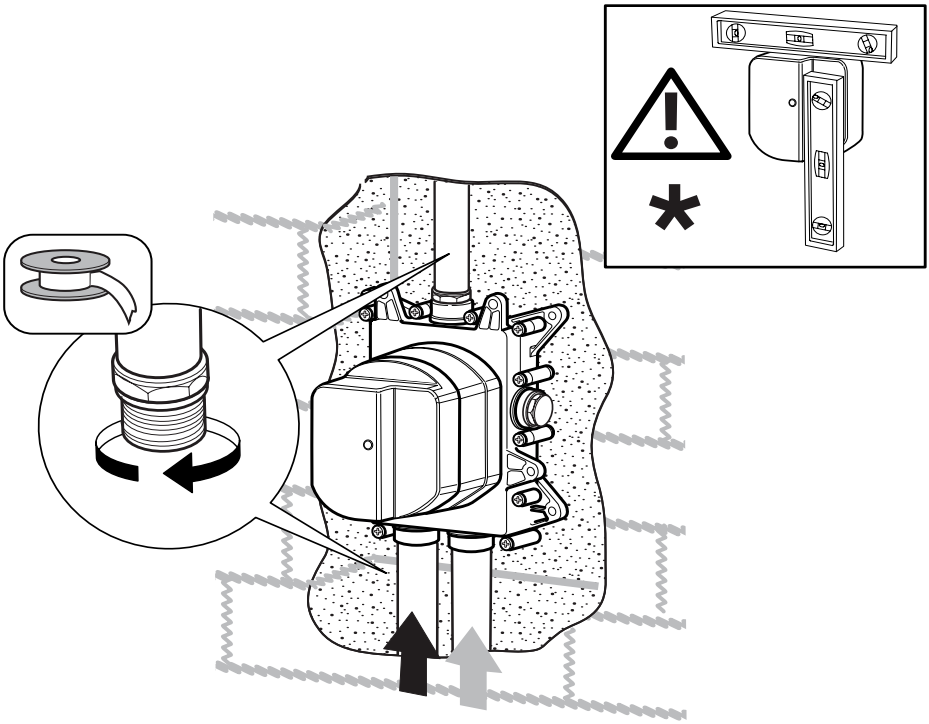

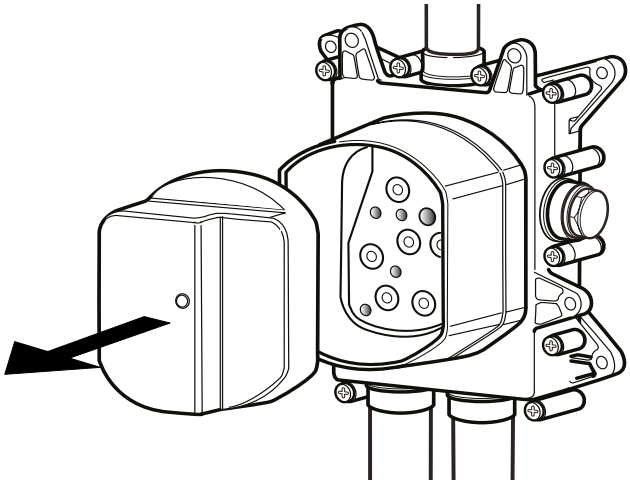

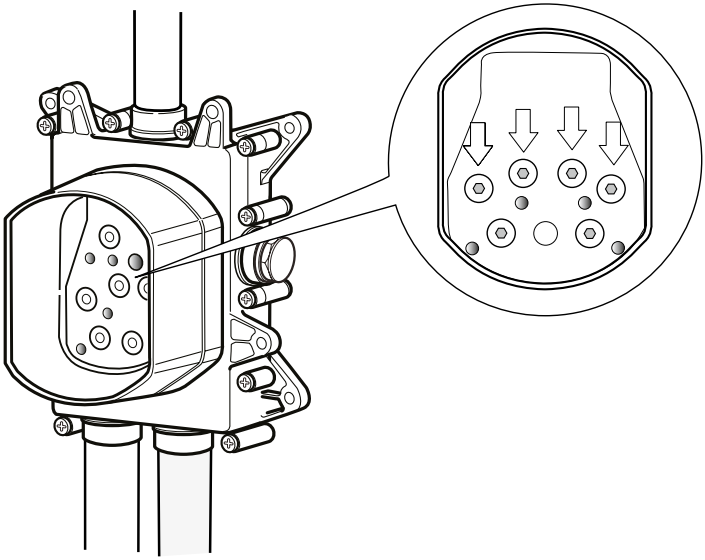

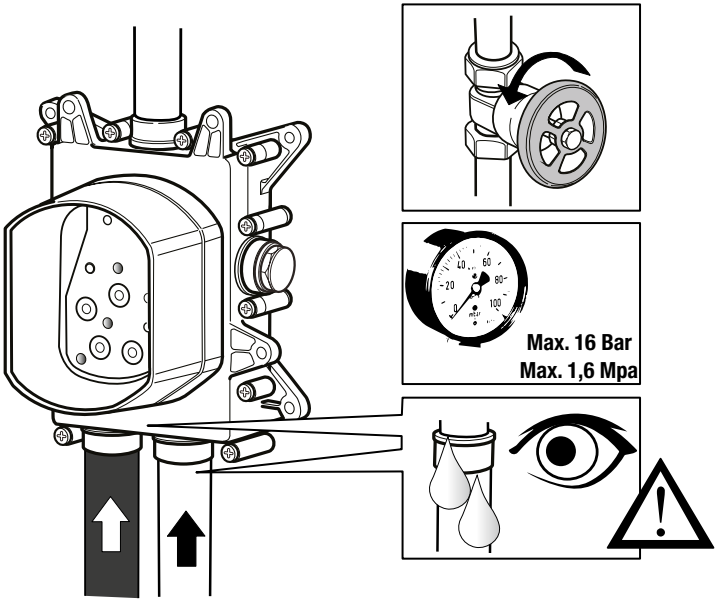
Max. 16 Bar
Max. 1,6 Mpa

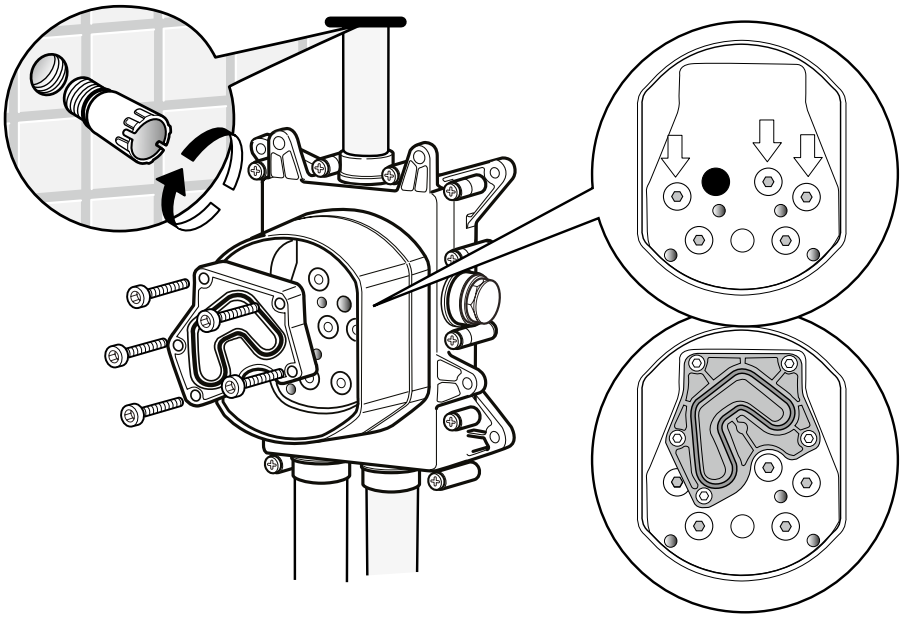

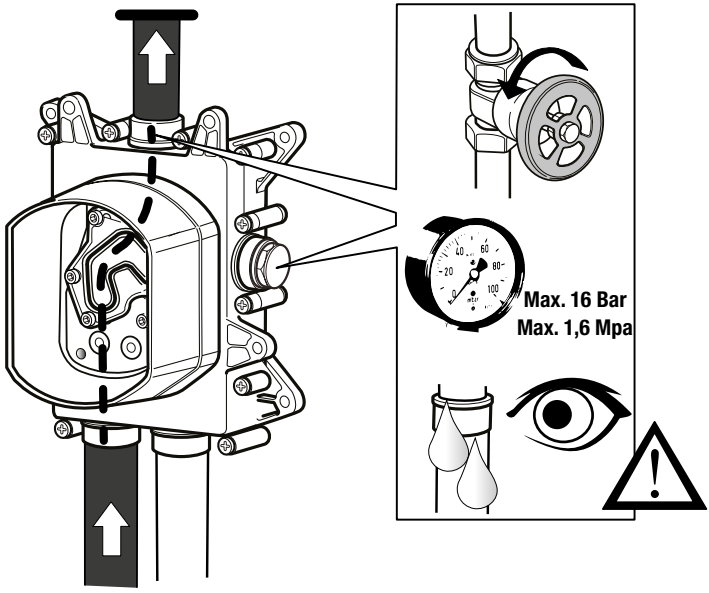
Max. 16 Bar
Max. 1,6 Mpa

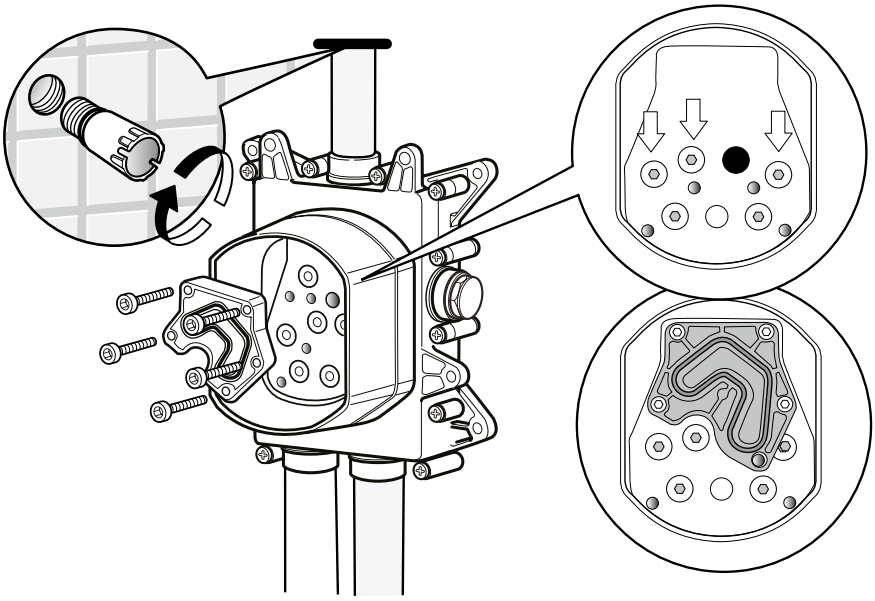

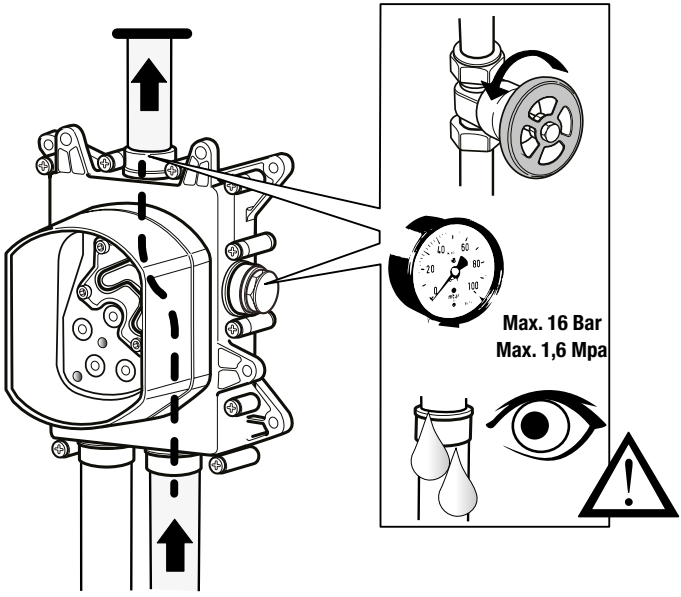
Max. 16 Bar
Max. 1,6 Mpa