
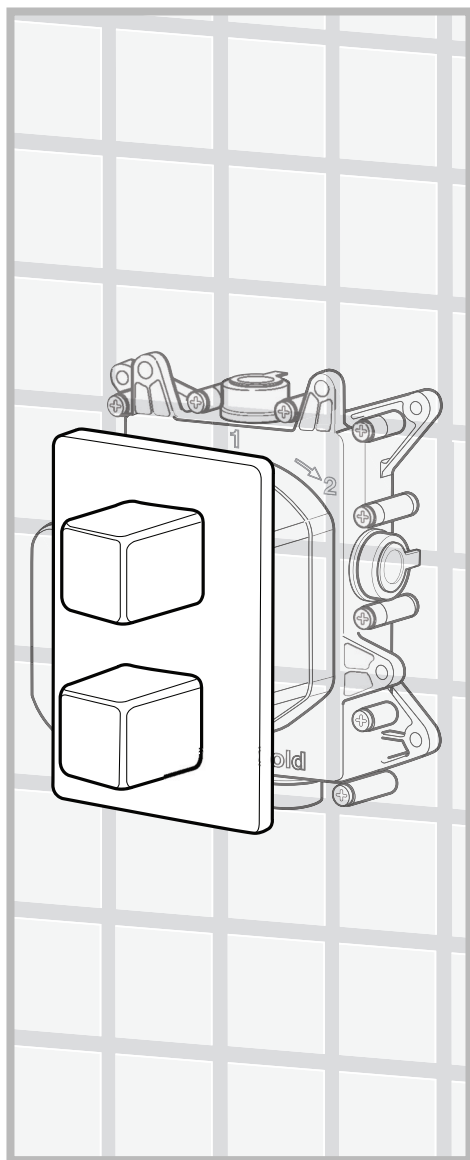


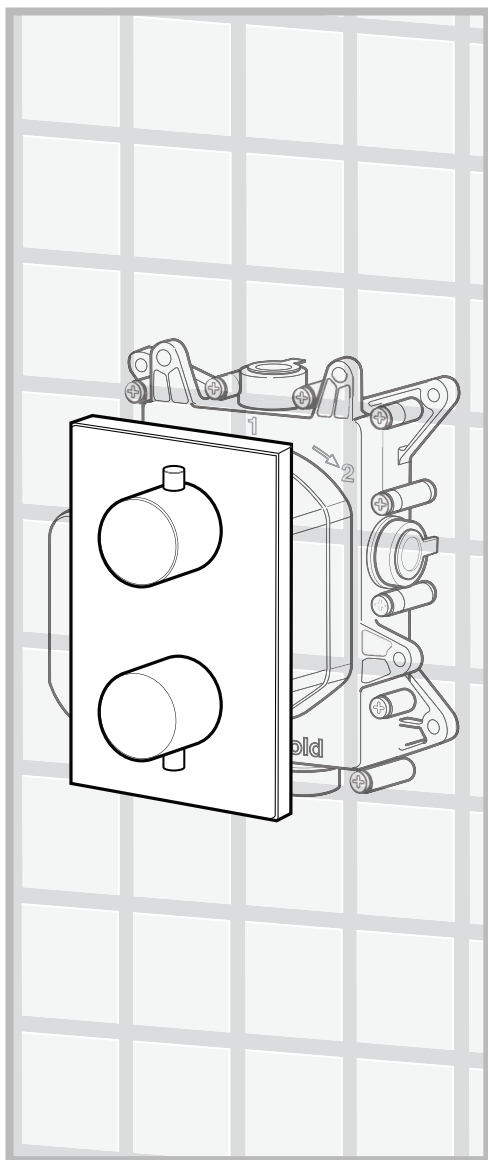

Completion Concealed Box

Mounting Instructions

Pressure range min/max 0,5/5 bar

(in case of water pressure higher than 5 bar we recommend installing pressure reducers).

Recommended pressure 3 bar.

Operation:





Either with gas or electric accumulation
boilers.

Centralised systems.

Safety lock at:	41°
Min. Working temperature:	3°C
Min. recommended:	15°C
Max. Working temperature:	80°C
Max. recommended:	65°C
<i>Recommended thermal differential</i>	50°C

Safety system with flow stop in case
of lack of one of the two waters.

Warning: contact the plumber for the choice of the best water heating device.


Press.		FLOW RATE (L/min)			
bar	Term. 1 way		Term. 2 way		
					
	Exit 1/2/3	Exit 2	Exit 3	Mix	
	0,5	8,2	8,2	8,2	9,2
	1	11,7	11,7	11,7	13,2
	2	16,7	16,4	16,4	18,7
	3	20,7	20	20	22,9
	4	24	23	23	26,4
	5	26,6	25,8	25,8	29,5

Press.


FLOW RATE (L/min)

Term. 3 ways


bar



Exit 1



Exit 2



Exit 3

0,5

9,4

8,1

8,1

1

13,4

11,6

11,6

2

19,2

16,6

16,6

3

23,7

20,5

20,5

4

27,4

23,8





23,8

5

30,5



26,6

26,6

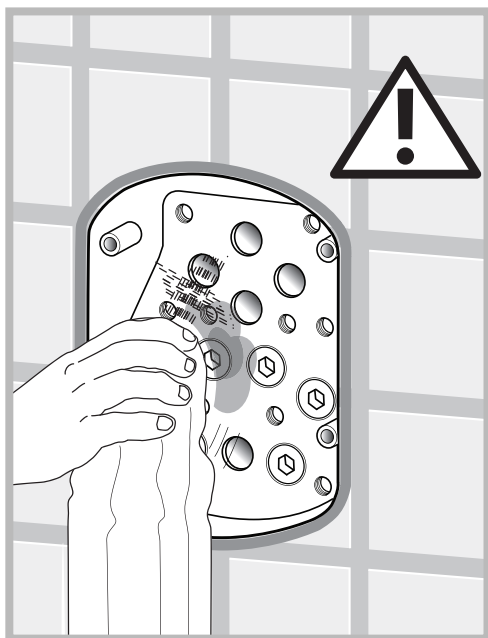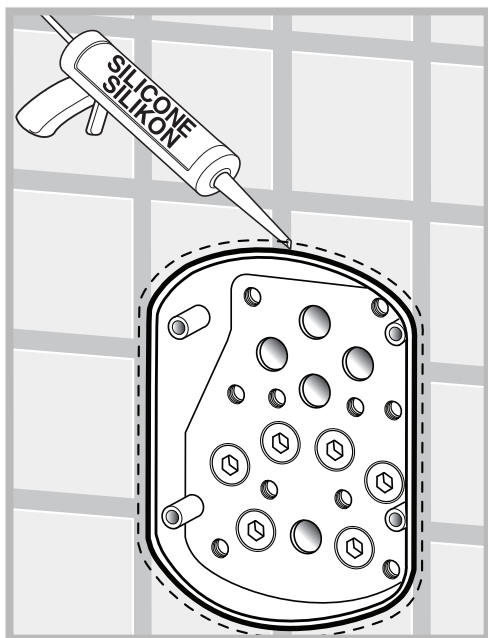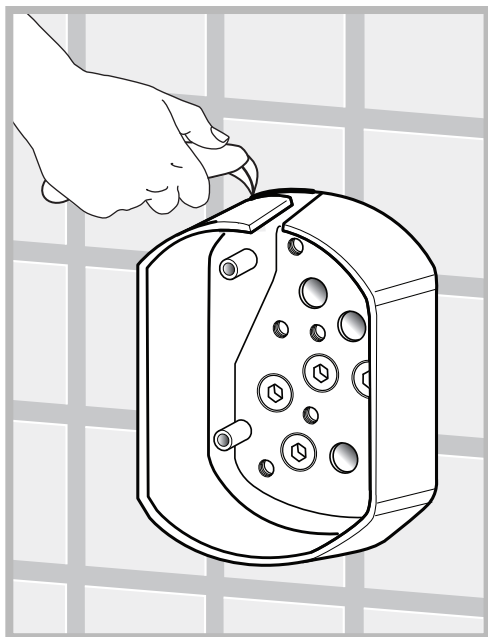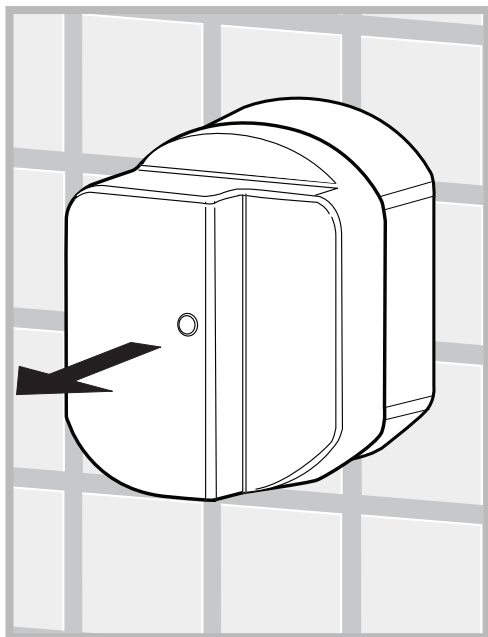

THERMOSTATIC

1-2-3 WAYS








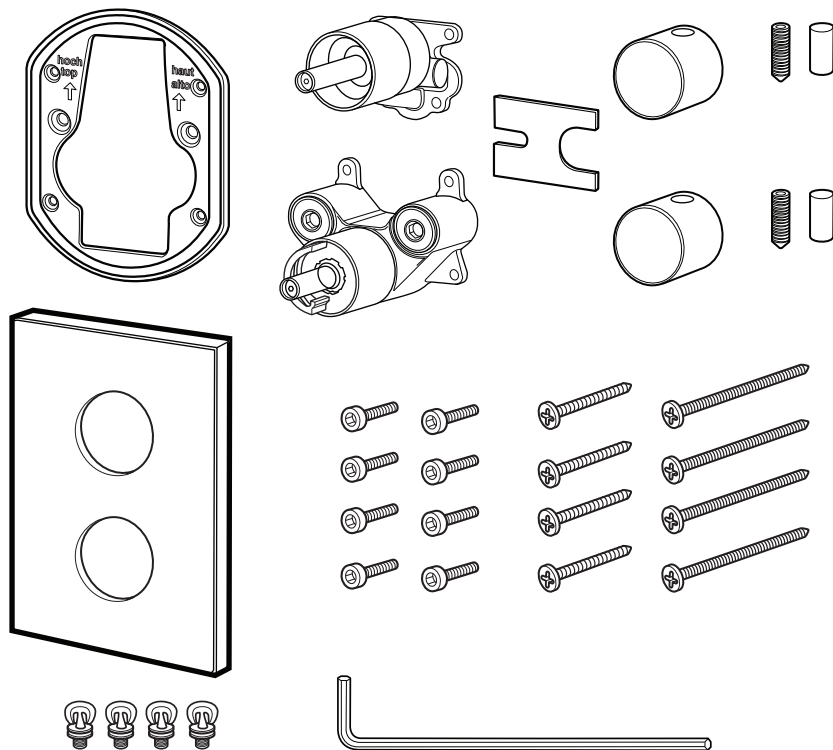



GB Mounting instructions





THERMOSTATIC



1-2-3 WAYS

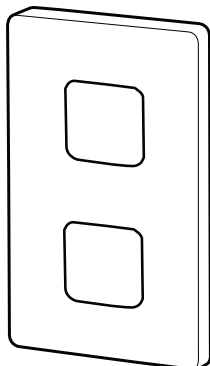






GB Mounting instructions



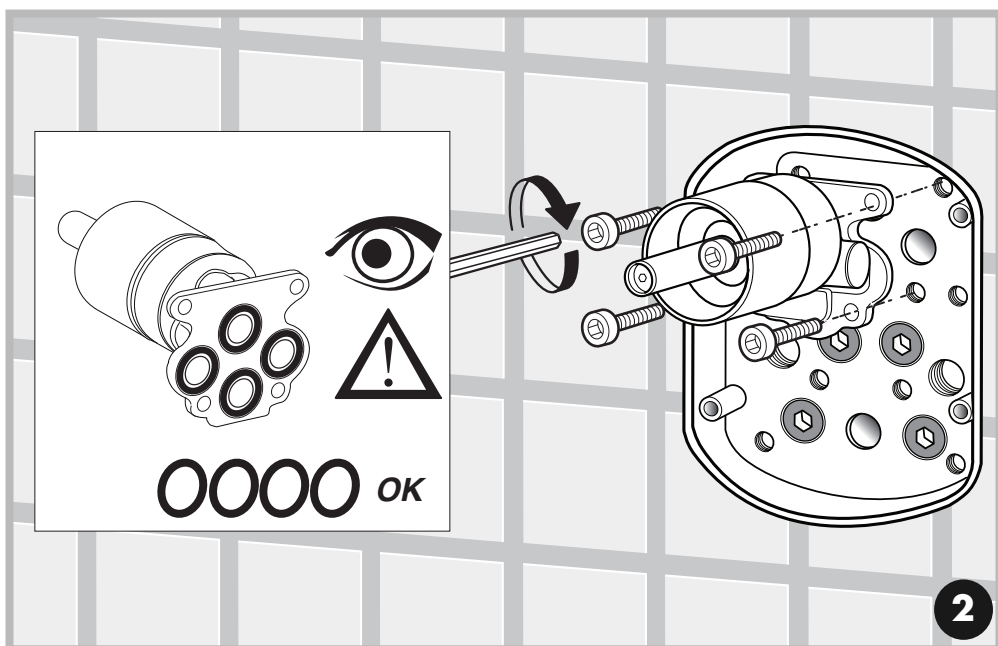
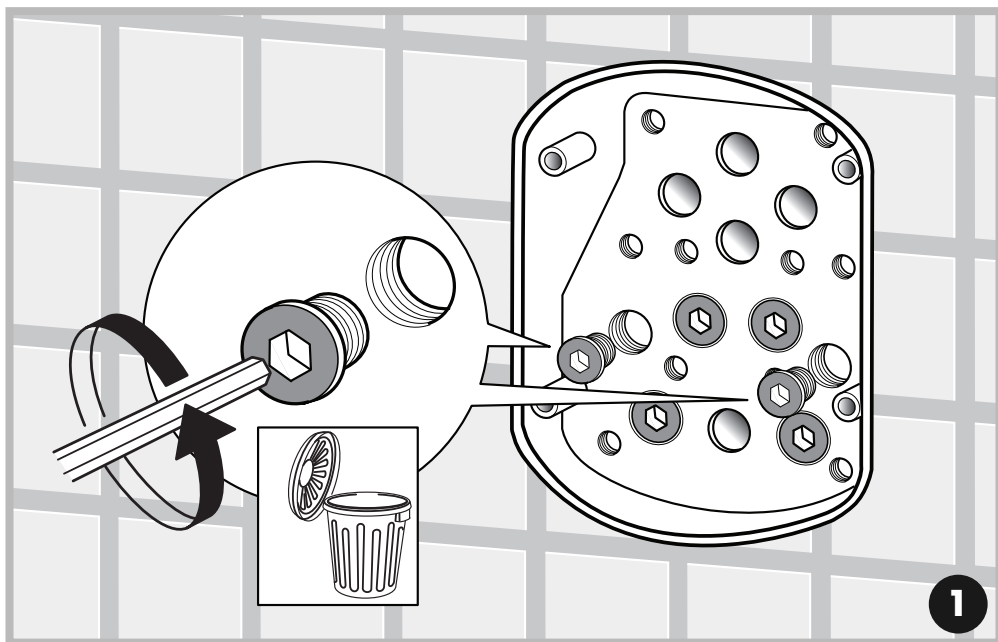


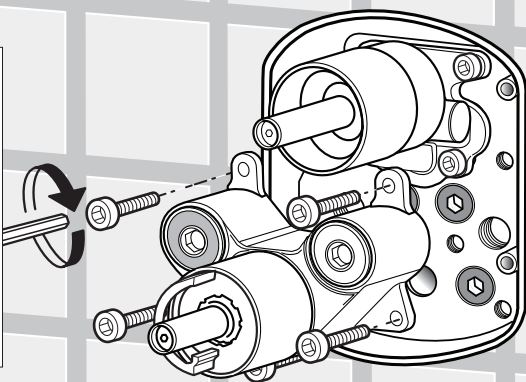
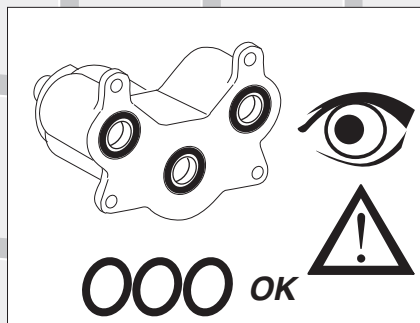




3

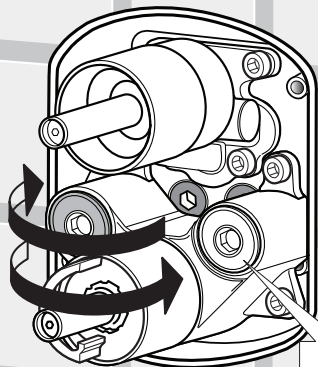



4

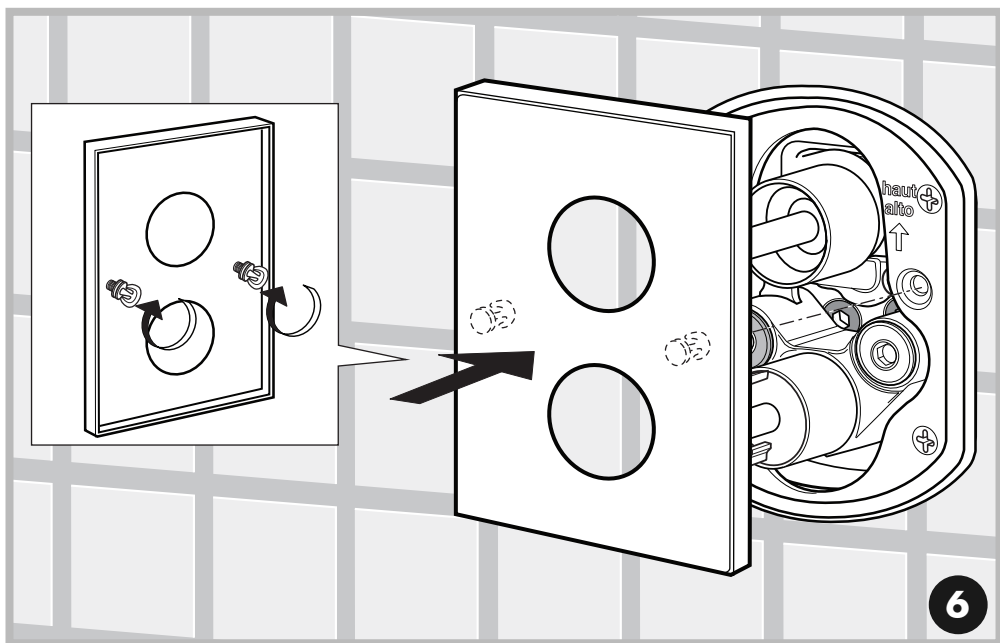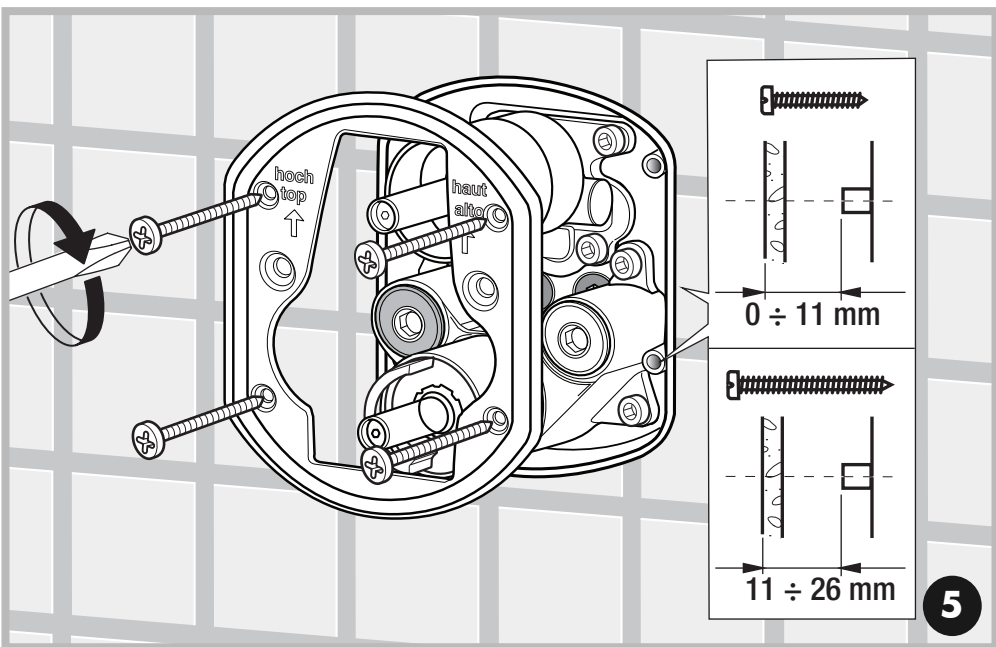

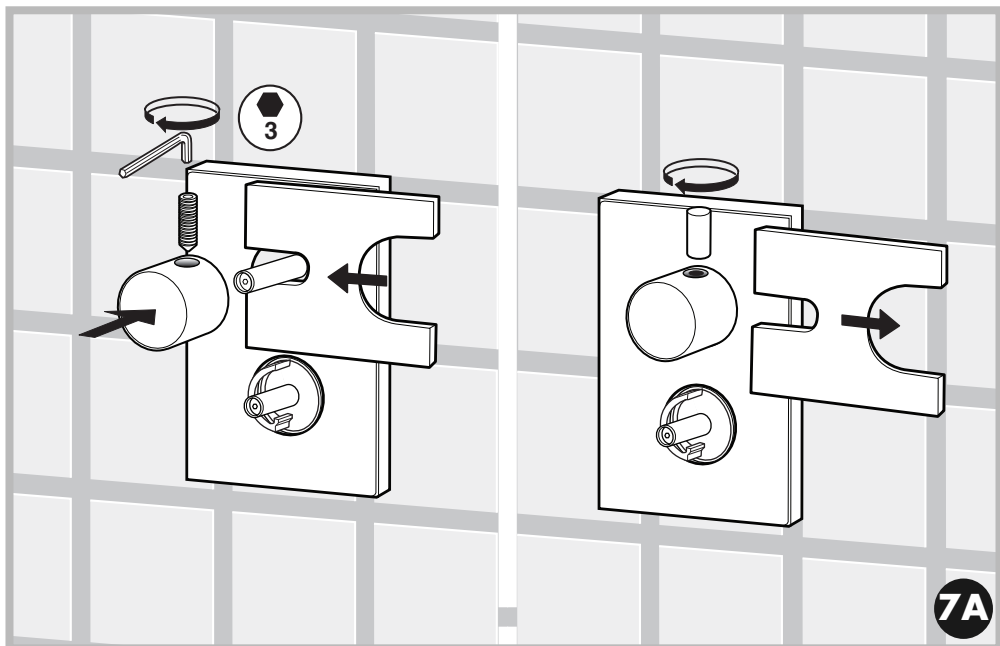
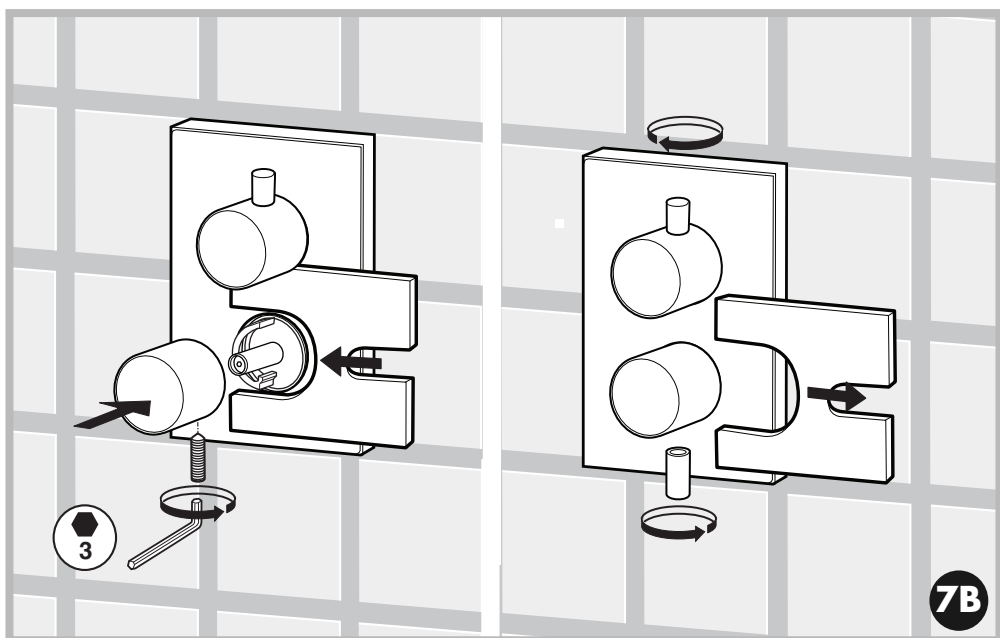
**7A****7B**

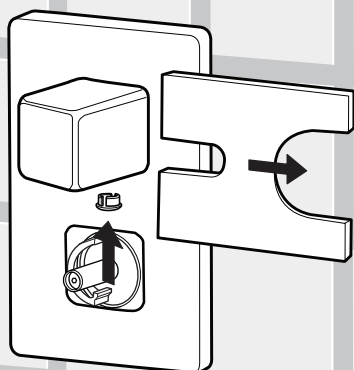
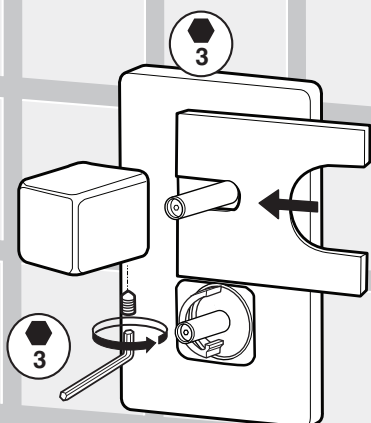





8A

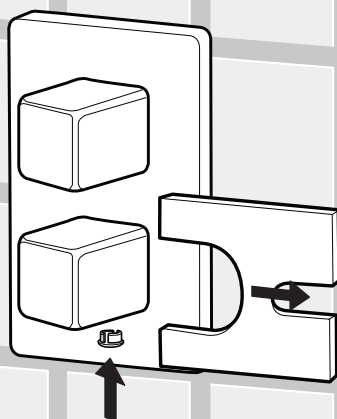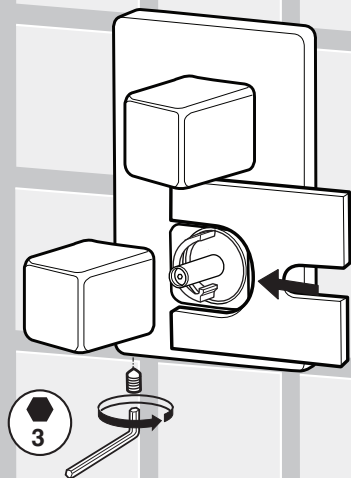


8B

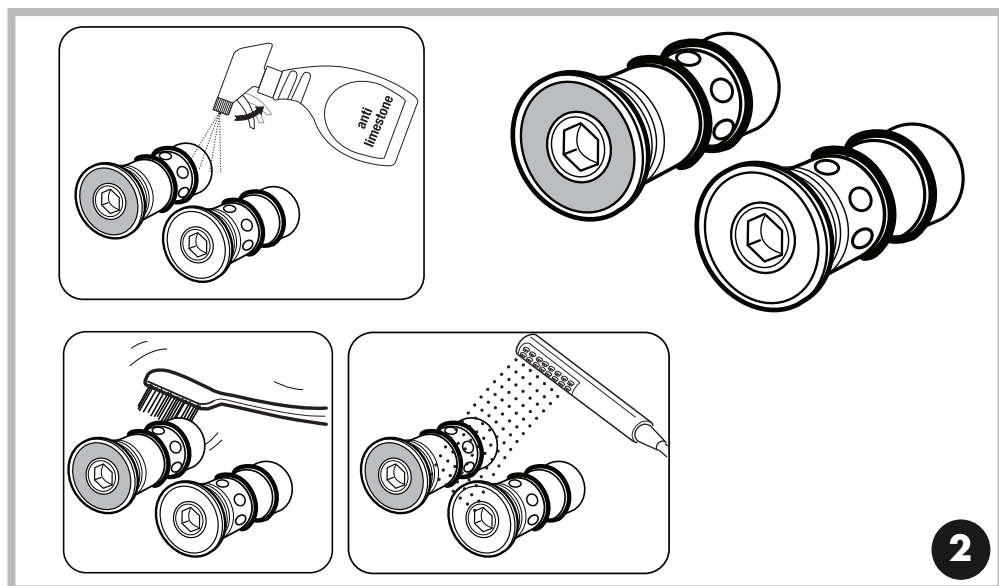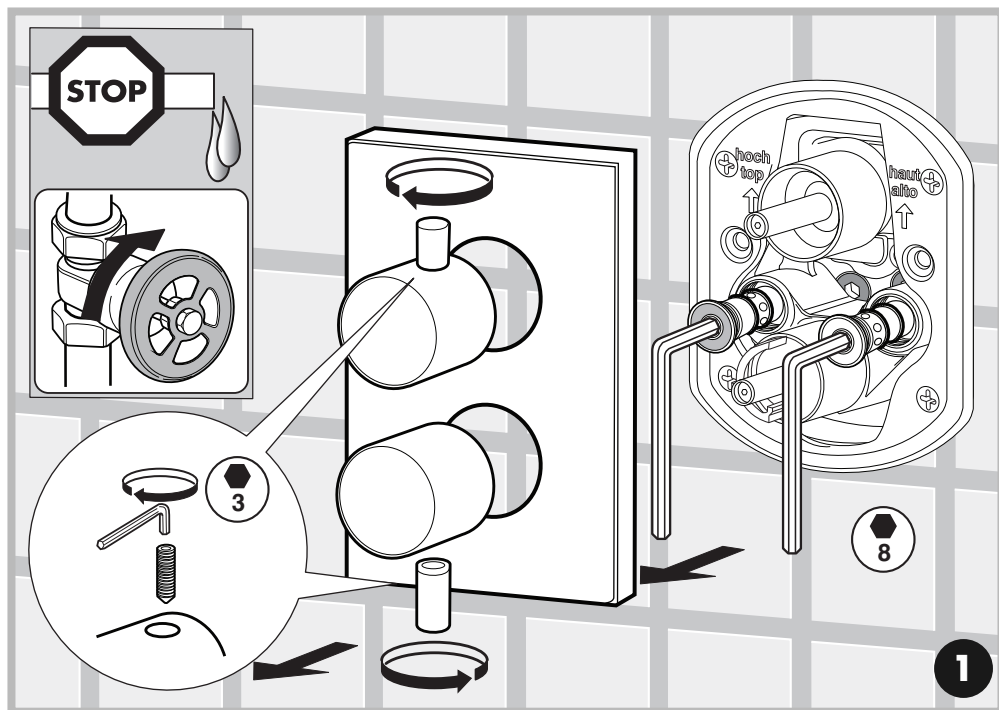


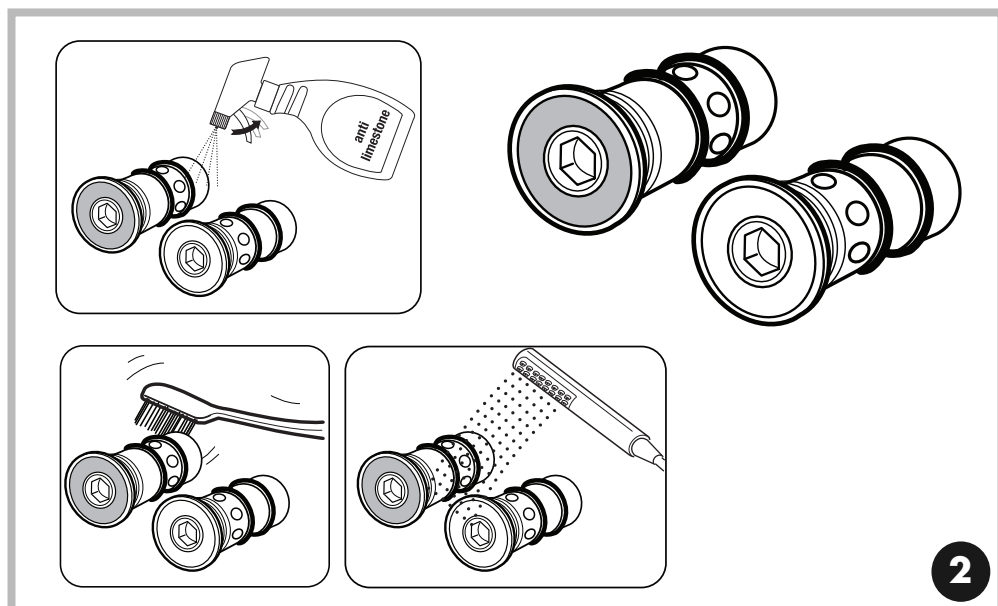
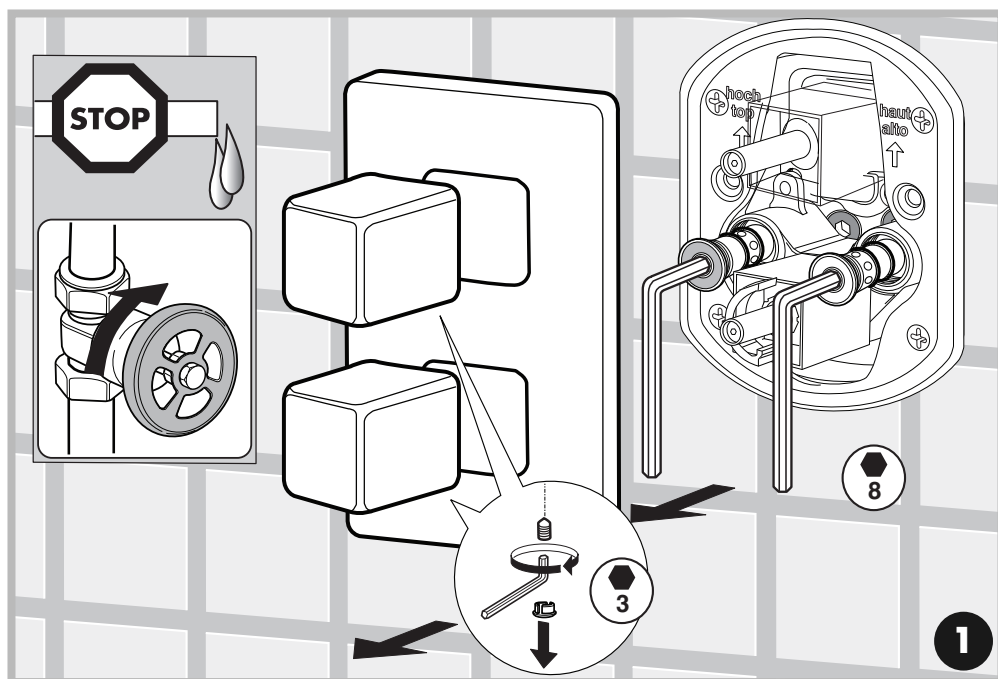


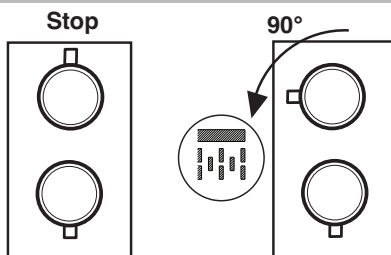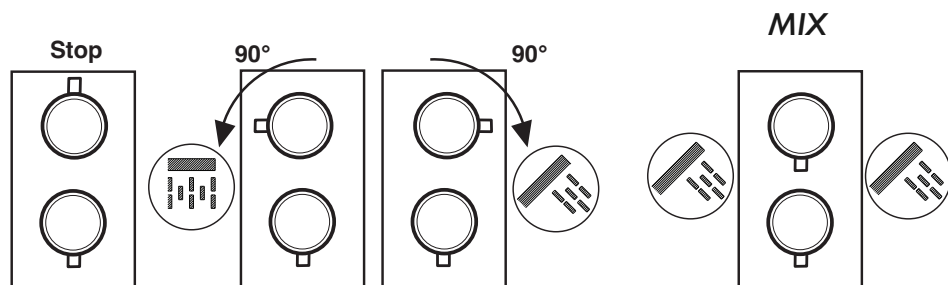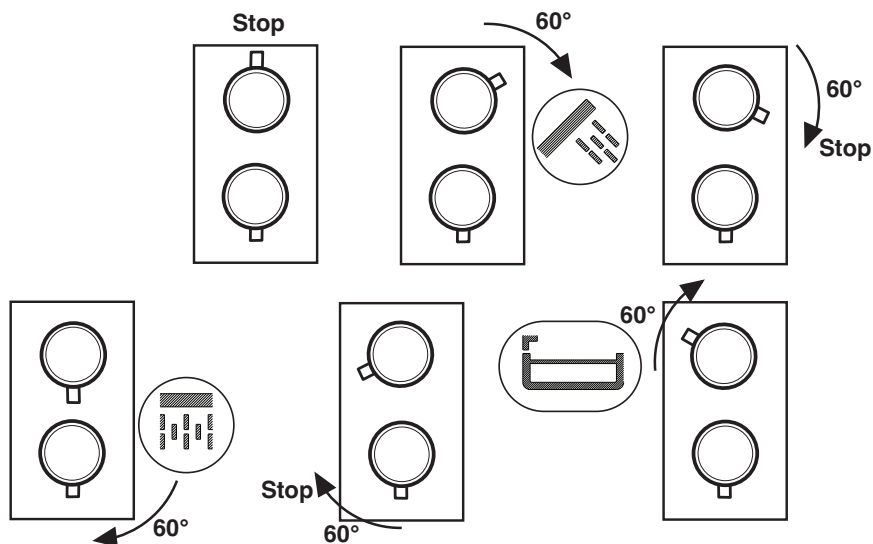**THERMOSTATIC 1 WAY****THERMOSTATIC 2 WAYS****THERMOSTATIC 3 WAYS**

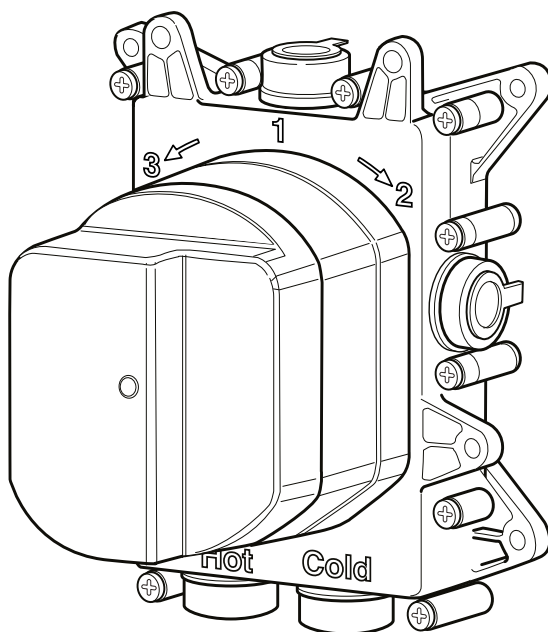

Concealed Box

Mounting Instructions

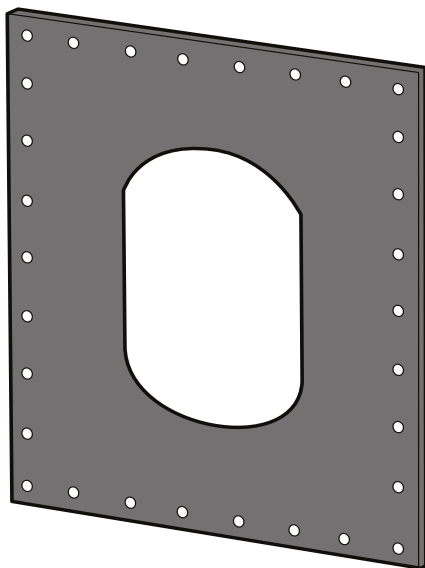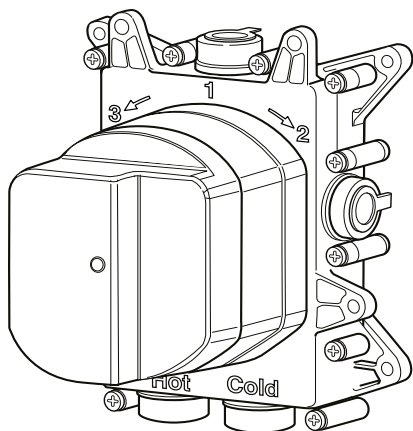

Mounting instructions



Pressure range min/max 0,5/5 bar

(in case of water pressure higher than 5 bar we recommend installing pressure reducers).

Recommended pressure 3 bar.

Operation:

Either with gas or electric accumulation boilers.

Centralised systems.

<i>Safety lock at:</i>	41° C
------------------------	-------

<i>Min. Working temperature:</i>	3° C
----------------------------------	------

<i>Min. recommended:</i>	15° C
--------------------------	-------

<i>Max. Working temperature:</i>	70° C
----------------------------------	-------


<i>Max. recommended:</i>	65° C
--------------------------	-------



<i>Recommended thermal differential</i>	50° C
---	-------

Thermal disinfection is allowed.

Safety system with flow stop in case of lack of one of the two waters.

Warning: contact the plumber for the choice of the best water heating device.

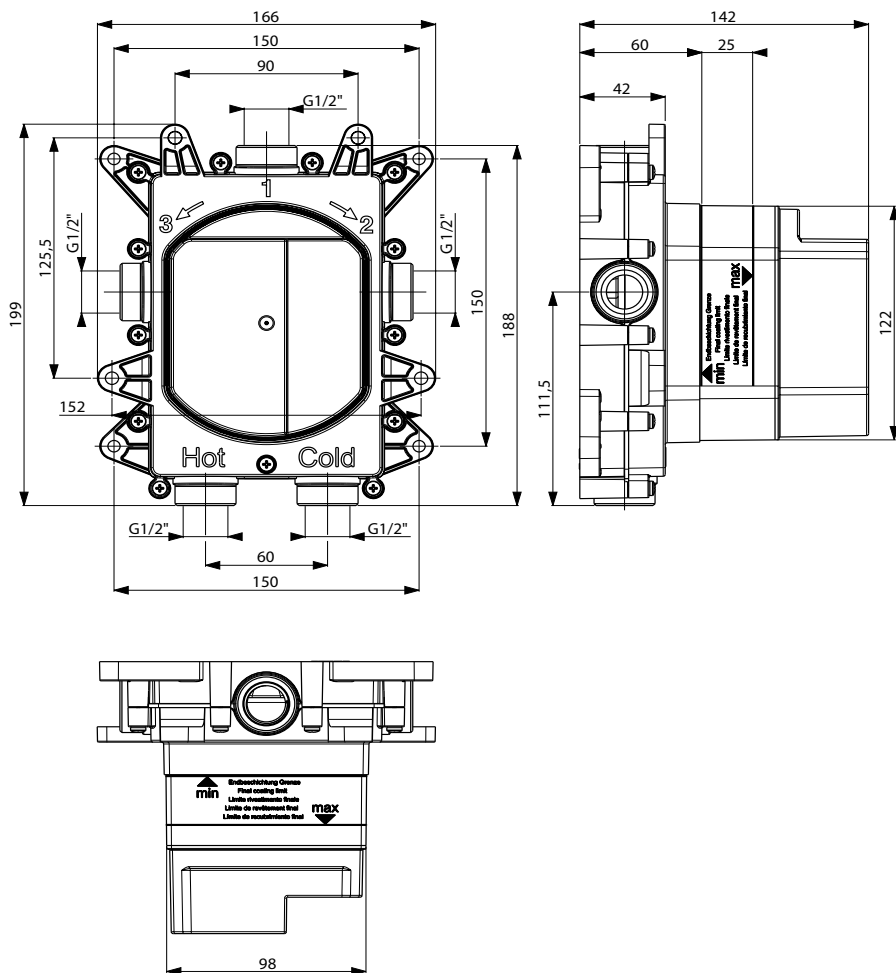


Press.	FLOW RATE (L/min)			
bar	Push button 2 ways			
				
	Exit 1		Exit 2	
	min.	max.	min.	max.
	1,5	7,5	1,5	7,5
	2,3	11,3	2,3	11,2
	3,5	16,5	3,5	16
3	4,5	20,5	4,5	20
4	5,5	23,7	5,2	22,8
5	5,7	26,5	5,7	25,5


Press.

FLOW RATE (L/min)


Push button 3 ways



Exit 1



Exit 2



Exit 3

bar

min. max.

min. max.

min. max.

0,5

1,8 8,1

1,8 7,7

1,8 7,7

1

2,7 11,8

2,6 11,5

2,6 11,5

2

3,9 16,8

3,9 16,7

3,9 16,7

3

4,8 20,7

4,8 20,5

4,8 20,5

4

5,5 24

5,5 23,7

5,5 23,7

5



6,2 26,7

6,2 26,6

6,2 26,6

**2 WAYS - ONLY PUSH VERSION**

ATTENTION:
indications valid only
for PUSH VERSION!

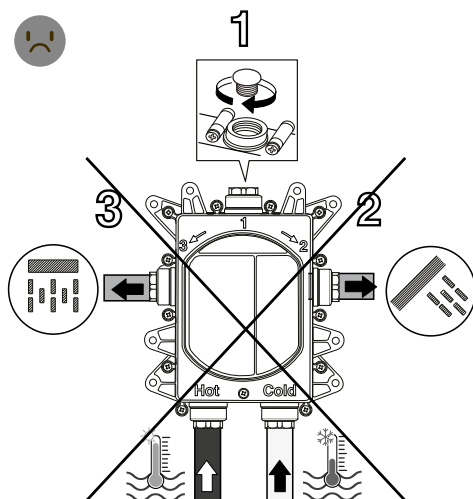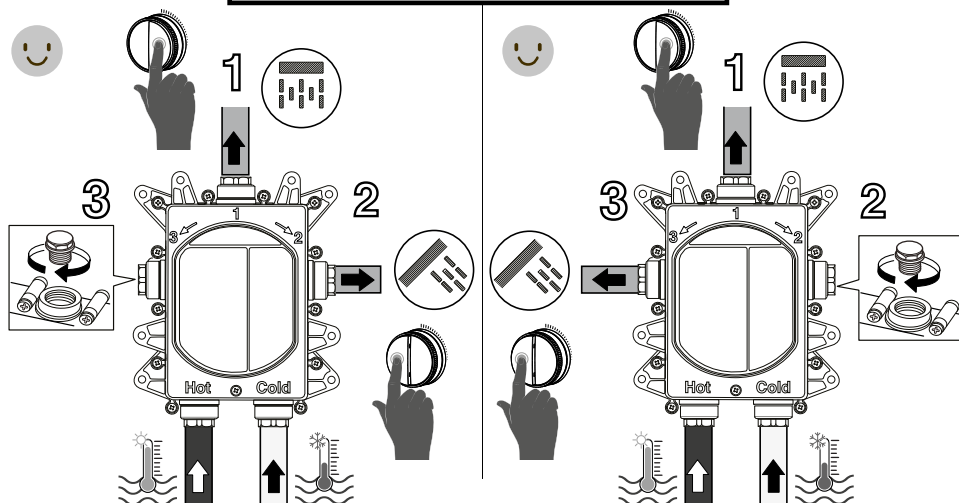

**3 WAYS - ONLY PUSH VERSION**



ATTENTION:
indications valid only
for PUSH VERSION!




1



3



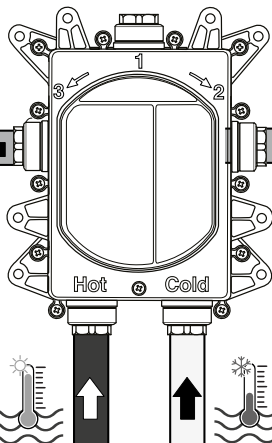






2



Press.


FLOW RATE (L/min)

bar	Term. 1 way		Term. 2 way	
				
	Exit 1/2/3	Exit 2	Exit 3	Mix
	0,5	8,2	8,2	9,2
	1	11,7	11,7	13,2
	2	16,7	16,4	18,7
	3	20,7	20	22,9
	4	24	23	26,4
	5	26,6	25,8	29,5




Press.	FLOW RATE (L/min)		
	Term. 3 ways		
			
	Exit 1	Exit 2	Exit 3
	bar		
	0,5	9,4	8,1
	1	13,4	11,6
	2	19,2	16,6
	3	23,7	20,5
	4	27,4	23,8
	5	30,5	26,6



ATTENTION:
indications valid only
for **OTHER VERSIONS!**


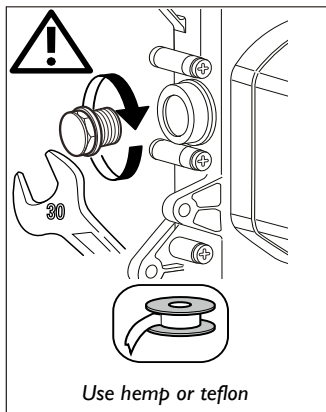


1 way

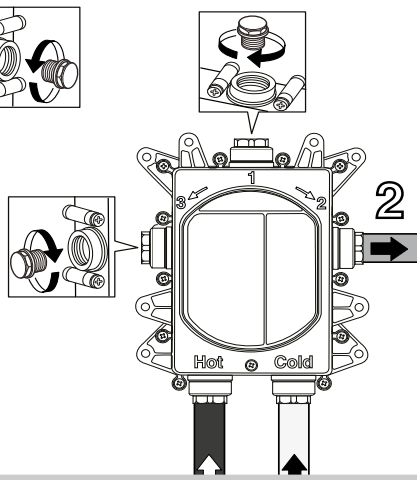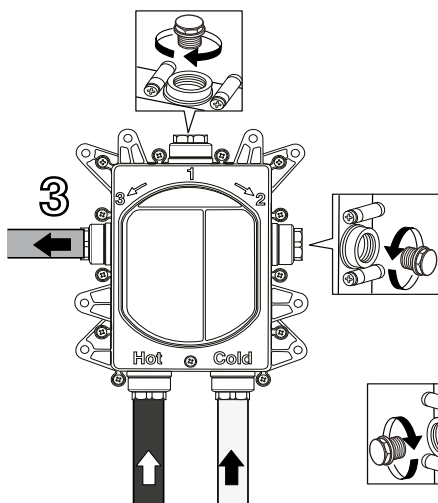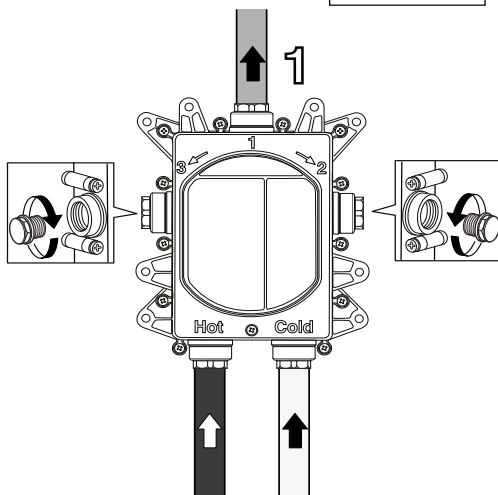









ATTENTION:
indications valid only
for **OTHER VERSIONS!**

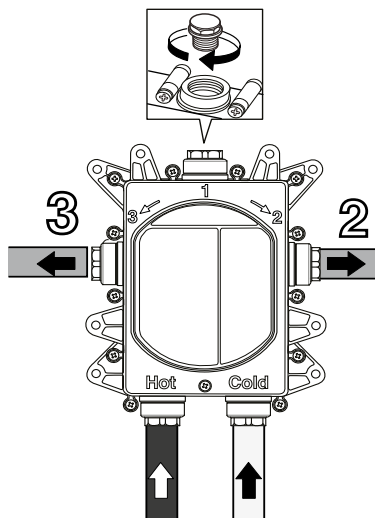
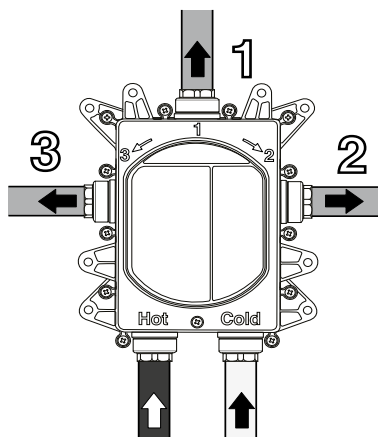
2 ways**3 ways**




min. 250 mm

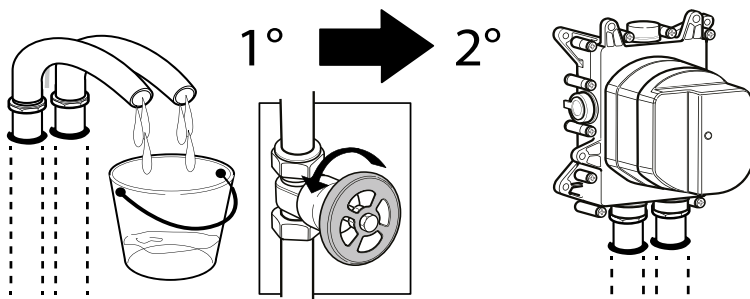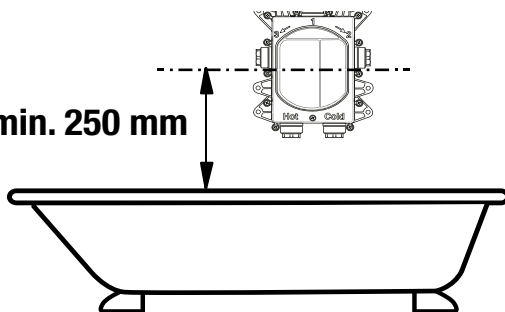

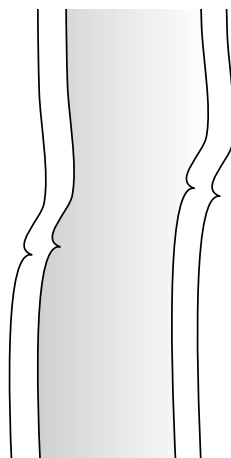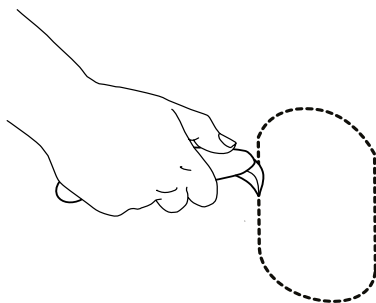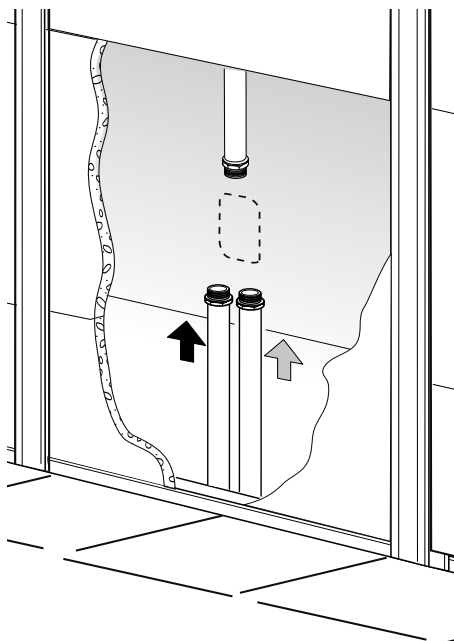





OK




NO




OK



NO



OK



NO

