


BAYSWATER

London W.2

CODE: BAYR018

DESCRIPTION: Nelson Triple Radiator 1800X291

CATEGORY: Heating

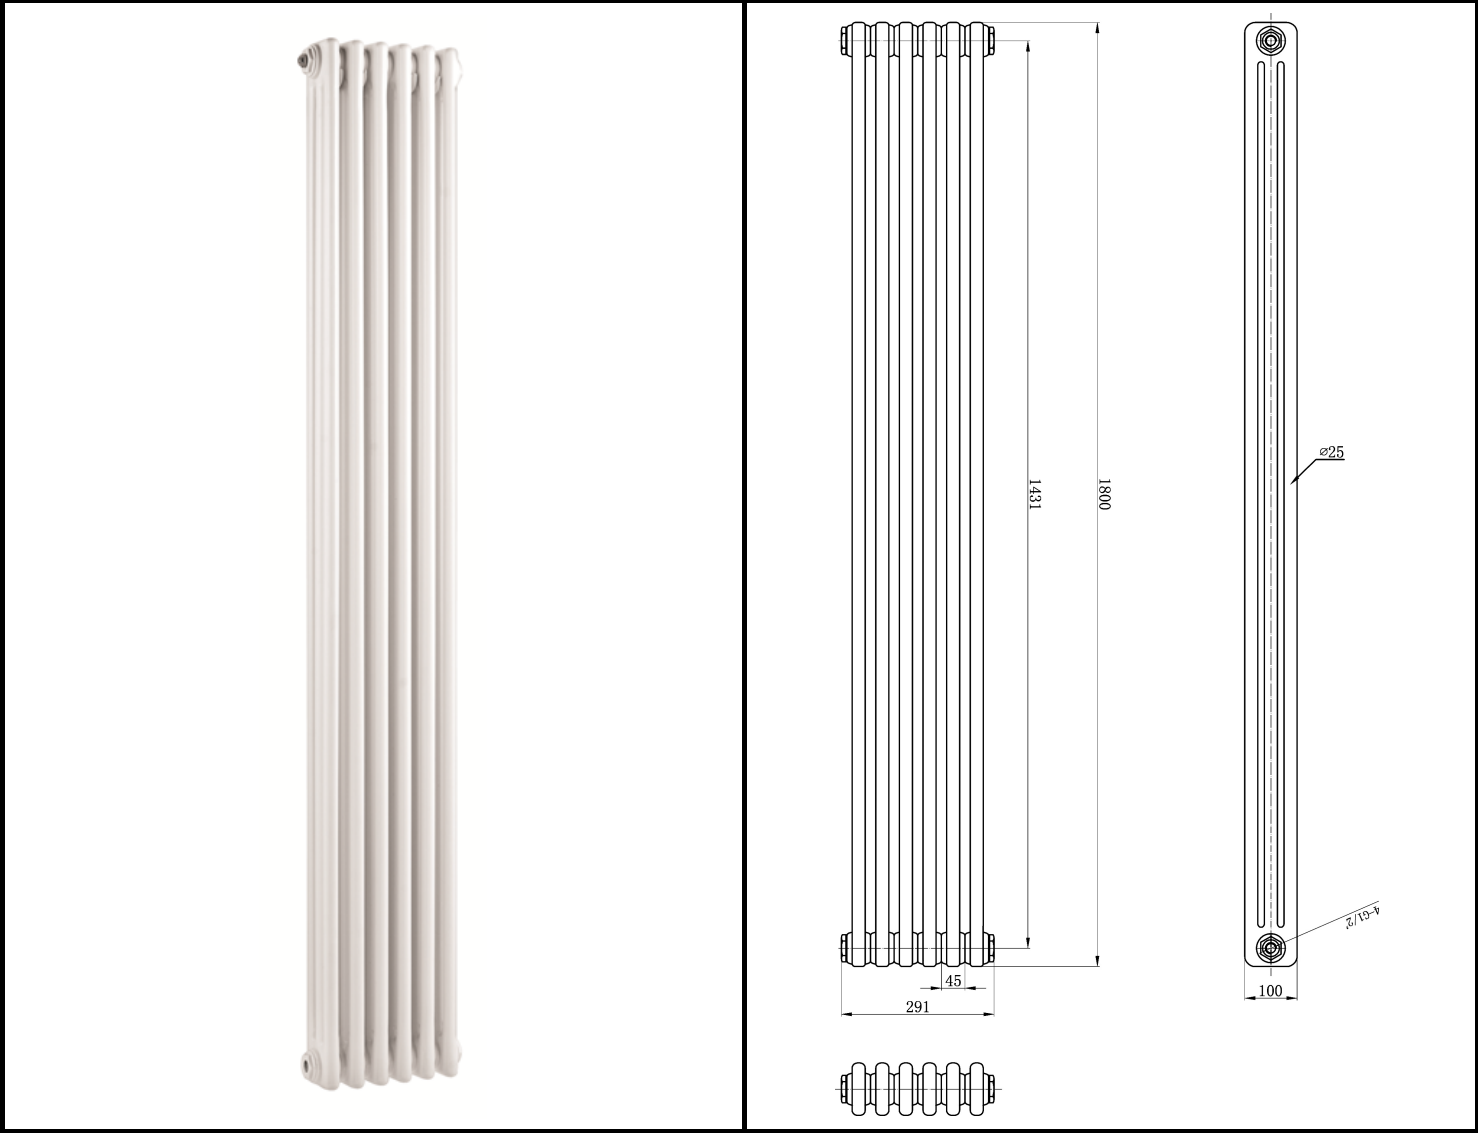

PRODUCT DIMENSIONS				
Height (mm)	Width (mm)	Depth (mm)	Length (mm)	Nett Wgt Kg
1800	291	100		34

PACKAGING DIMENSIONS			
Height (mm)	Width (mm)	Length (mm)	Gross Wgt Kg
1600	440	157	34

PACKAGING DATA			
Box Colour	White Cardboard Shrinkwrapped		
Box Qty	1	Label Colour	White Label
Label Size	100 x 50	Label Qty	2

OUTER BOX DIMENSIONS (If Applicable)			
Height (mm)	Width (mm)	Length (mm)	Gross Wgt Kg
Barcode	5055275890073		

PRODUCT DETAILS						
Contry of Origin	United Kingdom					
Fitting Instruction	Yes					
RAL No	9016					
Heat Element Wattage	Not Applicable					
BTU Outputs	30°C	1717	50°C	3348	60°C	4262
Pipe Centres	381mm					
Packaging Volume (L)	91					
Wall to Ctr of Tappings	75					
Dual Fuel	N/A					

Certification	CE	No	RoHS	N/A	WEEE	N/A
Colour/Finish	White					
Product Material	Steel					
Heat Element Wattage Compatible	N/A					
Thermal Outputs (Watts)	30°C	503	50°C	981	60°C	1249
Max Projection	190mm					
Tube Diameter	25mm					
Floor to Ctr of Tappings	N/A					


BAYSWATER

London W.2

CODE: BAYR999

DESCRIPTION: Nelson Floor Mounting Kit

CATEGORY: Heating

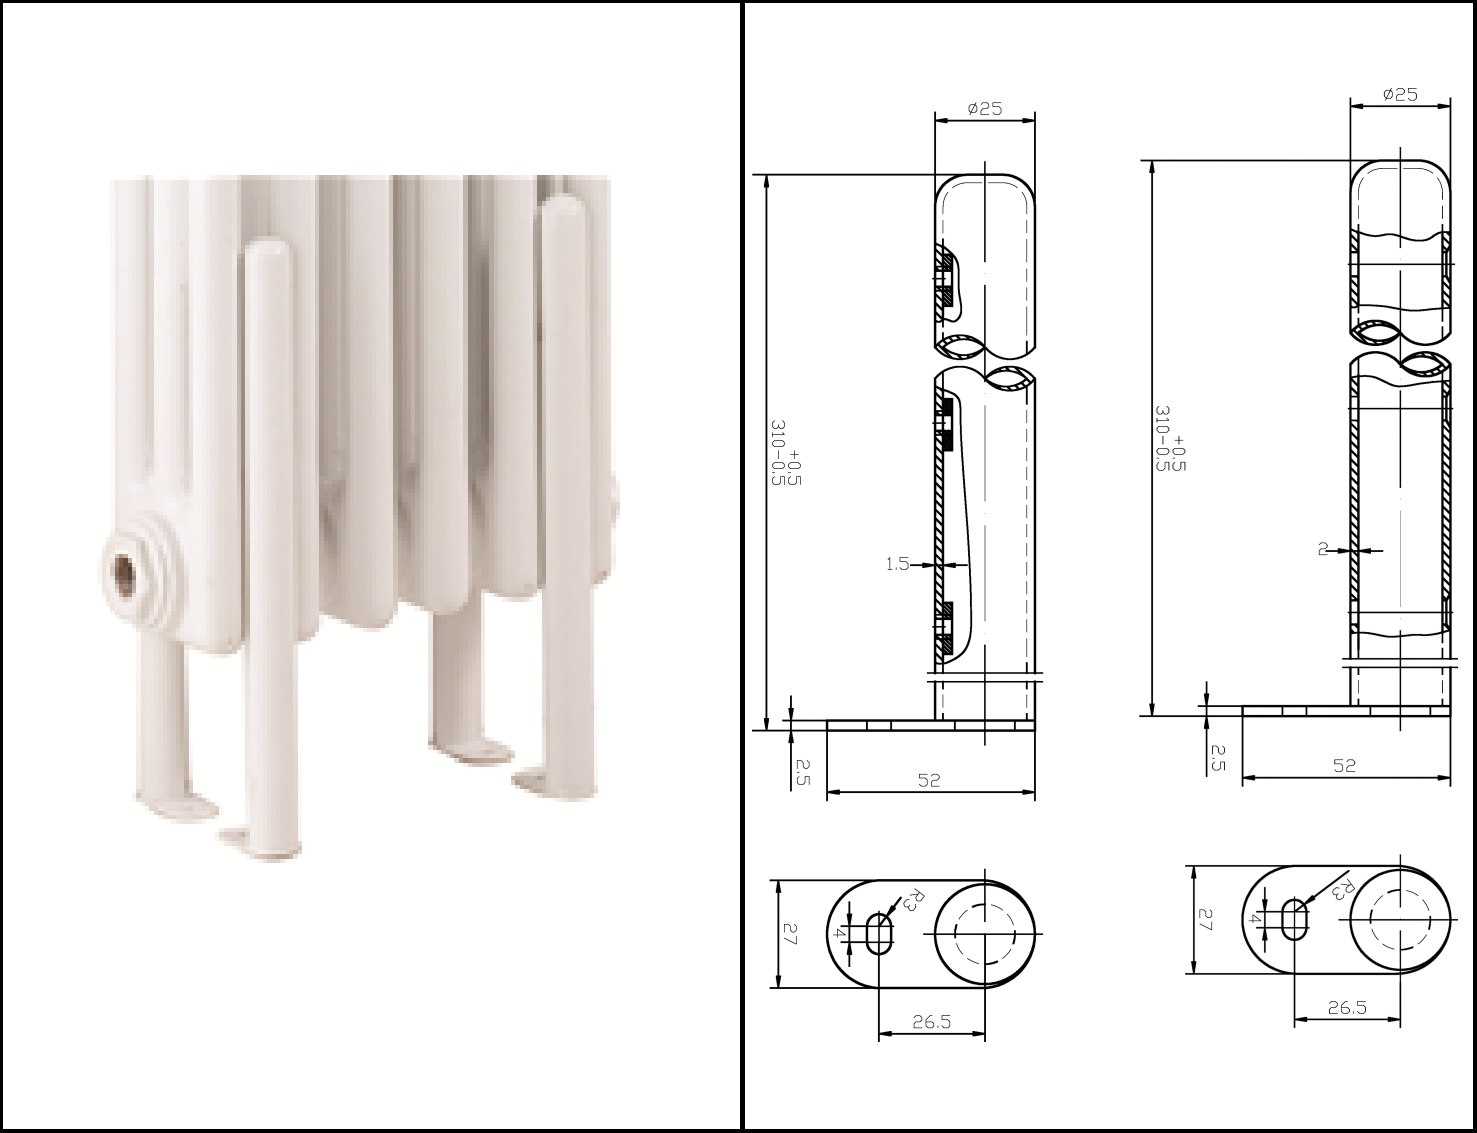

PRODUCT DIMENSIONS				
Height (mm)	Width (mm)	Depth (mm)	Length (mm)	Nett Wgt Kg
310	27	52		38

PACKAGING DATA			
Box Colour	White Cardboard Box		
Box Qty	1	Label Colour	White Label
Label Size	100 x 50	Label Qty	1

PACKAGING DIMENSIONS			
Height (mm)	Width (mm)	Length (mm)	Gross Wgt Kg
1100	675	157	38

OUTER BOX DIMENSIONS (If Applicable)			
Height (mm)	Width (mm)	Length (mm)	Gross Wgt Kg
Barcode	5055275890141		

PRODUCT DETAILS						
Contry of Origin	United Kingdom					
Fitting Instruction	No					
RAL No	9016					
Heat Element Wattage	Not Applicable					
BTU Outputs	30°C	N/A	50°C	N/A	60°C	
Pipe Centres	N/A					
Packaging Volume (L)	N/A					
Wall to Ctr of Tappings	N/A					
Dual Fuel	N/A					

Certification	CE	N/A	RoHS	N/A	WEEE	N/A
Colour/Finish	White					
Product Material	Steel					
Heat Element Wattage Compatible	N/A					
Thermal Outputs (Watts)	30°C	N/A	50°C	N/A	60°C	
Max Projection	N/A					
Tube Diameter	N/A					
Floor to Ctr of Tappings	N/A					