

# SAFFRON BLK SHWR PK

## SAFFRON Shower Range

Saffron Black Concealed  
Dual Control Shower Pack



### Features:

- All in one box - pack includes shower valve with integral two outlet diverter, slimline 200mm round fixed head with shower arm, and shower kit with an adjustable riser rail plus a multi function handset and wall outlet.
- Rub clean handset and fixed head - limescale and debris build-up is quickly and easily removed by rubbing a finger or a cloth over the nozzles.
- On-trend matt black finish to make a statement in your bathroom.
- Slim design recessed shower valve will fit into a cavity space as small as 35mm for hassle-free installation.
- Dual control - Flow and temperature are operated separately giving accurate control of both.
- Cartridge can be accessed from the front for easy servicing.
- 15mm inlet connections.
- Fitting depth including plasterboard and tiles is 60mm - 75mm.
- 5-year parts and 1 year labour guarantee for peace of mind.
- Also available in chrome and brushed brass.
- Co-ordinating range of Bathroom taps available.


### Product Certifications:



### Specification

|                                          |                                                      |
|------------------------------------------|------------------------------------------------------|
| Finish/Colour:                           | Black                                                |
| Main Construction Material:              | Brass; ABS                                           |
| No of Controls:                          | 2                                                    |
| Shower Type:                             | Dual Control                                         |
| Shower Head Type:                        | Fixed Head and Adjustable Riser Kit                  |
| Valve/Cartridge Type:                    | Thermostatic Cartridge & 40mm Single Lever Cartridge |
| Maximum Hot Water Supply Temperature °C: | 65                                                   |
| Plumbing System Suitability:             | Suitable for all plumbing systems                    |
| Minimum Dynamic Pressure (bar):          | 0.2                                                  |
| Maximum Dynamic Pressure (bar):          | 5                                                    |
| Maximum Static Pressure (bar):           | 10                                                   |
| Connection Inlet:                        | 15mm Compression                                     |
| Connection Outlet:                       | G 1/2"                                               |
| Isolation Valve Included:                | No                                                   |
| Check Valve Included:                    | Yes                                                  |

### Dimensions (measurements in mm)

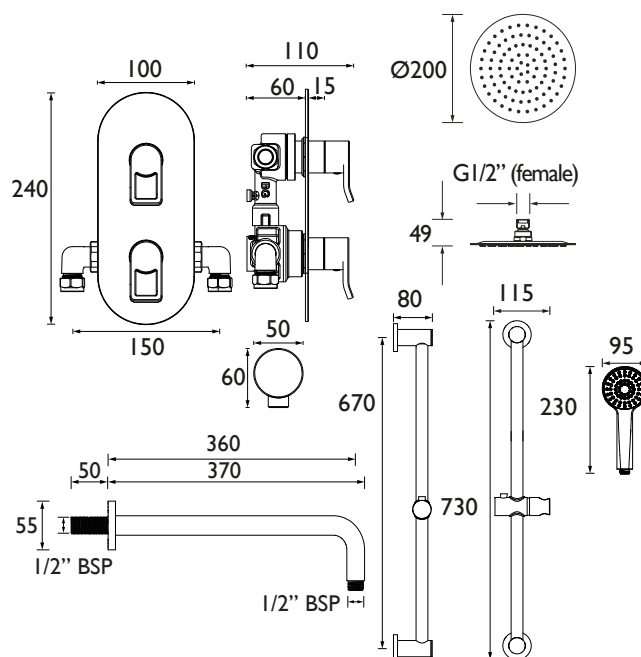

### Flow Rates (l/min)

| System Pressure (bar)                        | 0.2 | 0.5 | 1    | 2    | 3    | 5    |
|----------------------------------------------|-----|-----|------|------|------|------|
| Through Handset (mixed)                      | 2.7 | 5   | 7.3  | 7.8  | 8.9  | 9.8  |
| Through Fixed Head (mixed)                   | 3.6 | 5.9 | 6.5  | 8.1  | 8.5  | 9.6  |
| Through Handset (without flow regulators)    | 3.1 | 5.8 | 8.7  | 12.9 | 16   | 21   |
| Through Fixed Head (without flow regulators) | 5.9 | 9.3 | 13.5 | 19.5 | 23.3 | 24.8 |

TECHNICAL  
DATA  
SHEET



BRISTAN

D1