


# Mirror

*Burlington®*

Framed Mirror

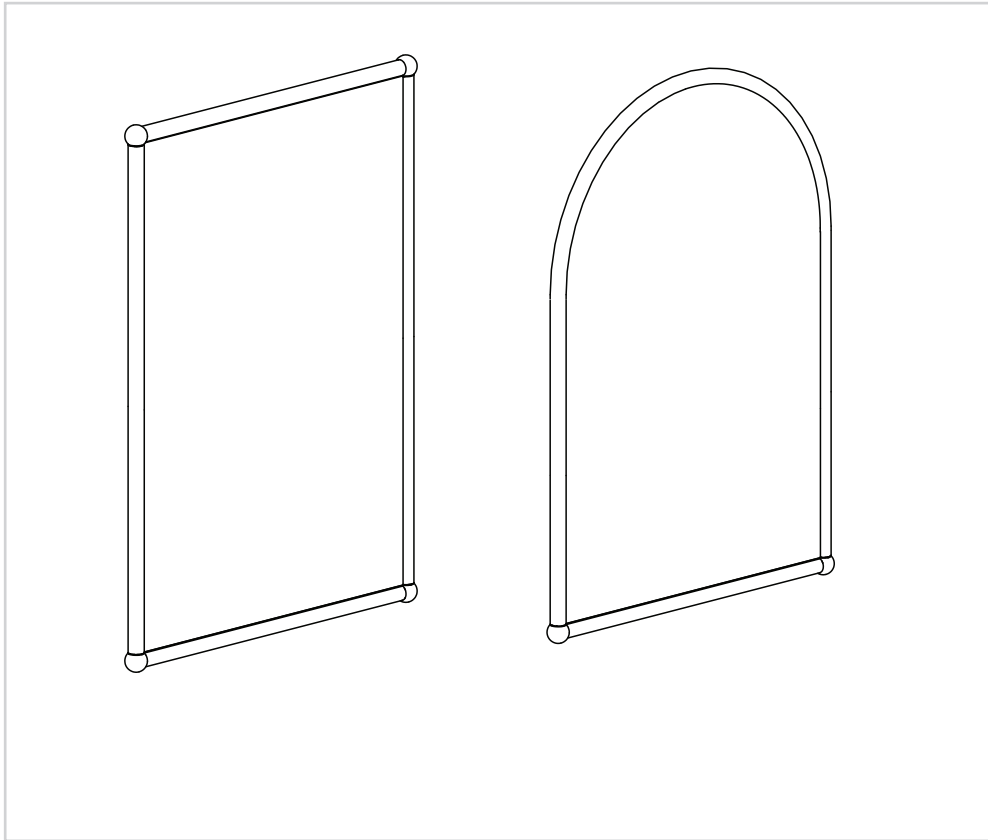

## PRODUCT CODES:

A9  
A11



## IMPORTANT INFORMATION

**Please read carefully and keep this information for further reference.**

Check the contents of the pack carefully before installation. Responsibility will not be held for any de-fit / re-fit costs where faulty product has been fitted. If any fault is found with materials or workmanship, it must be reported immediately to the manufacturer. Remedial action will be taken, based on information received, on condition that:

1. Full details are supplied to the manufacturer;
2. The product has not been modified or tampered with;
3. The manufacturer is informed of any damage/shortages prior to installation.
4. The product has not been installed, or attempts made to install. We do not accept responsibility for any problems that may occur through incorrect installation. Any modification to the supplied product will negate all product guarantees.





## BEFORE YOU START




Before drilling ensure there are no hidden cables or pipes (water, gas or electrical) behind mounting points. Always wear suitable eye protection when drilling. Ensure the wall surface is able to take the weight of the complete product.

When using power tools always follow the manufacturers user instructions.




Please follow the correct installation method. If the instructions are not followed appropriately there is an increased safety risk to the user.

## Tools Required (not supplied):

Spirit Level	
Pencil	
Drill	
Hammer	


Torque Screw Driver	
8mm Drill Bit	
Measuring Tape	

## Parts supplied:


		
2x	2x	2x

## INSTALLATION

- 1 Determine the final installation position, mark the fixing hole positions in pencil.

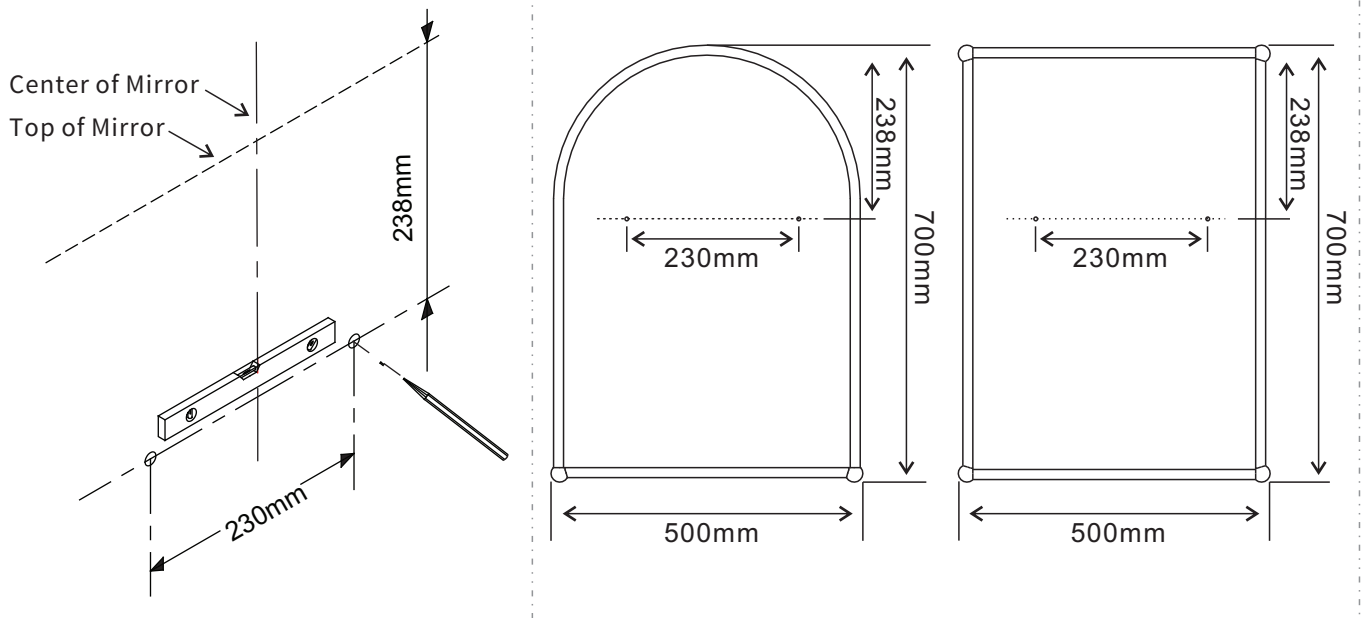


- 2 Using an 8mm drill bit, drill holes on the marked positions.  
(Note: In the event that the wall fixings supplied are inappropriate for the wall, please source alternatives).

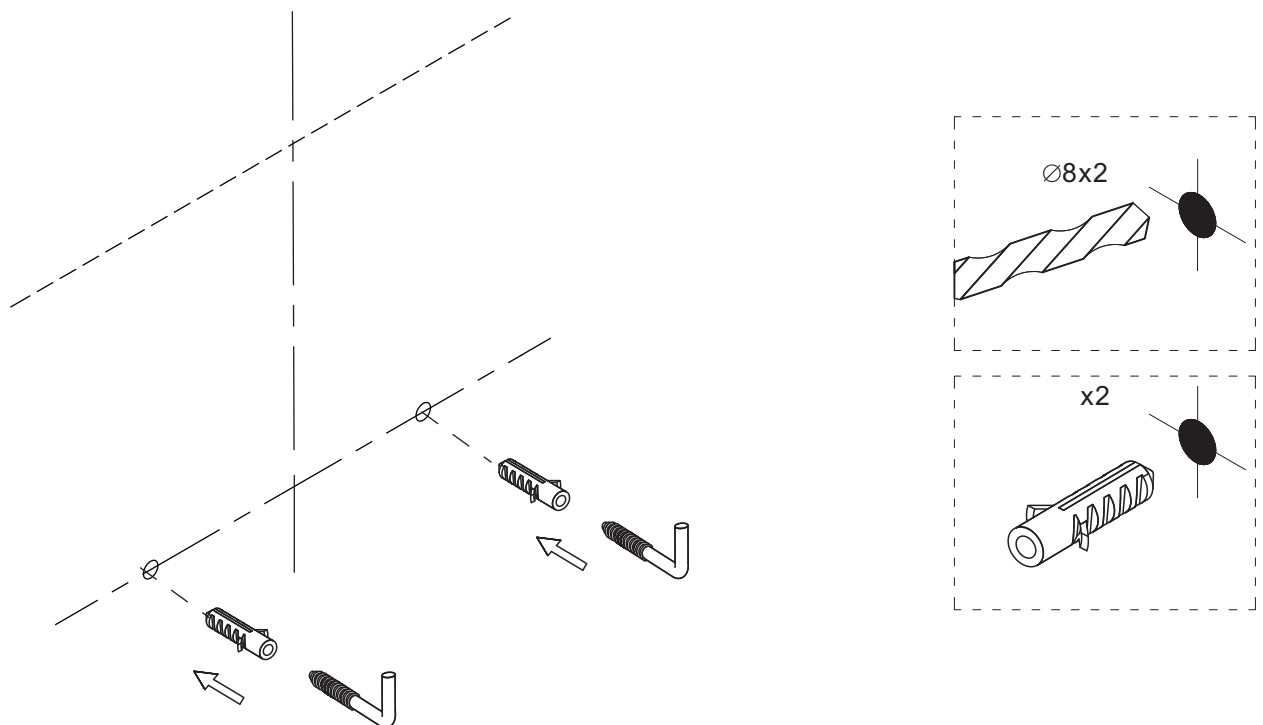

## INSTALLATION


3

Keep the stainless screw exposed 8mm outside the wall.  
Mount the mirror onto the wall by hanging the bracket of mirror onto the exposed screws.

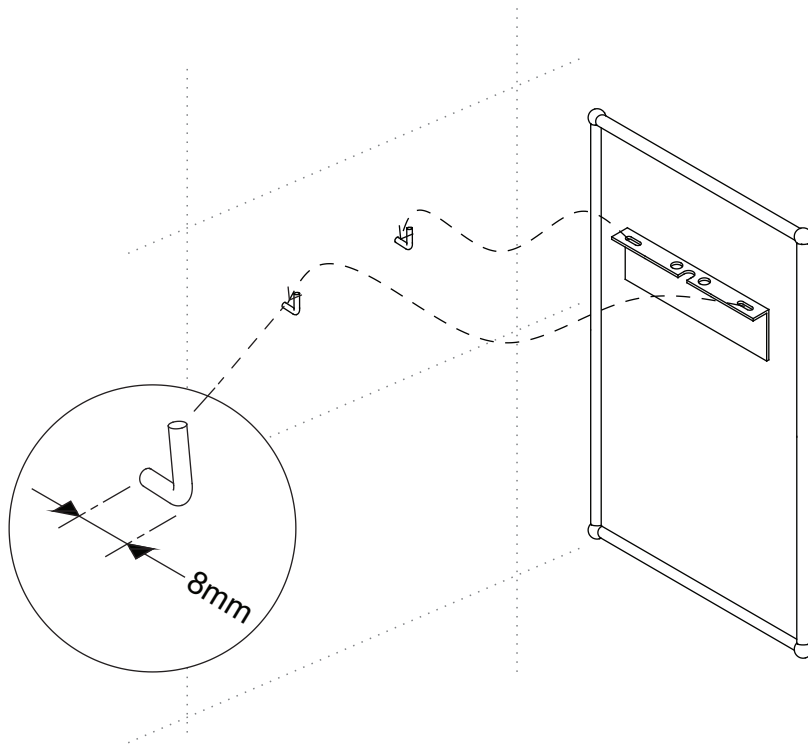

4

Check the mirror is stable.  
If not please readjust the exposed length of the screws and use the washers supplied if needed.

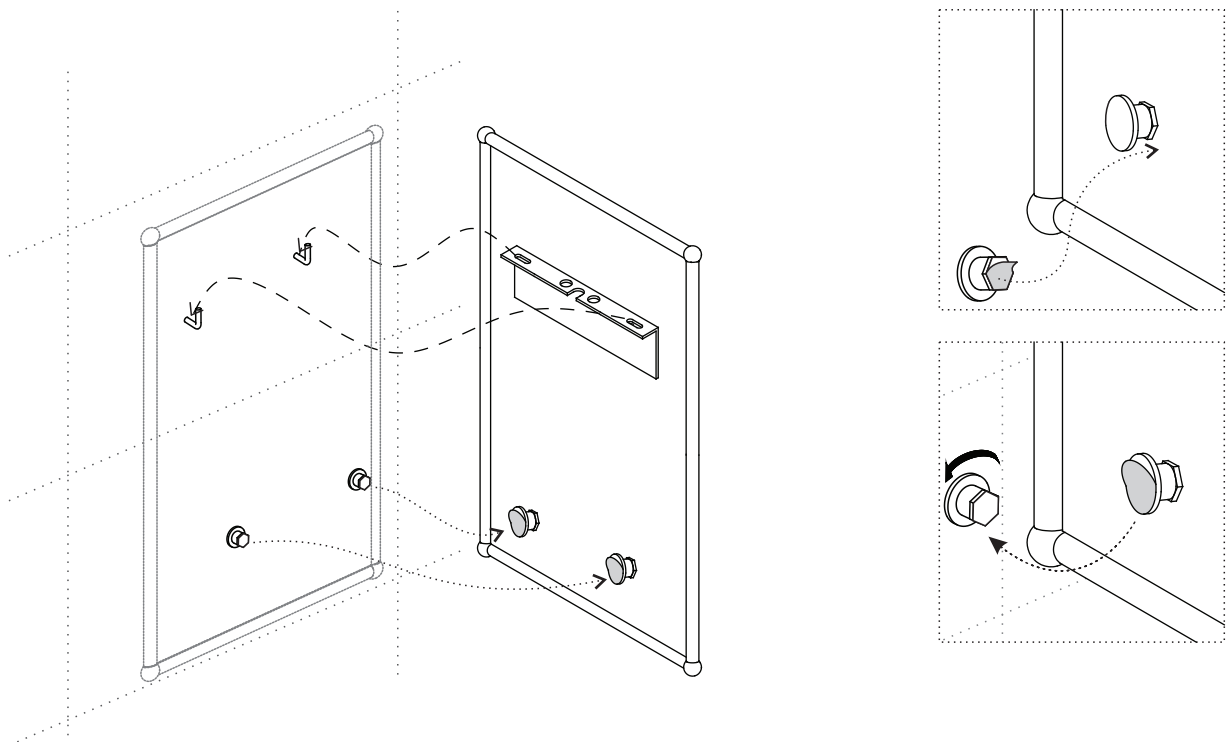

*Burlington*<sup>®</sup>

### **Maintenance & Cleaning**

The mirror edges are treated with a specially formulated sealant designed to protect the mirror edges from contaminants and discolouring.

Failure to follow cleaning guidelines can/will remove the benefits of the sealant.

NEVER use products containing bleach, cleaners of a gritty or abrasive nature or so called “glass and mirror” cleaning products, that can be detrimental to the long lasting finish of the mirror.

ONLY use a clean dry or damp micro fibre cloth to clean the mirror and mirror frame.



*Burlington*<sup>®</sup>

Part of the  
Bathroom Brands Group


We reserve the right to make technical modifications without prior notice.

*Burlington*<sup>®</sup>


Lake View House  
Rennie Drive, Dartford  
Kent DA1 5FU  
United Kingdom  
0345 873 8840  
[www.crosswater.co.uk](http://www.crosswater.co.uk)

Arched mirror 20x 28" Stainless	US-A9V
Arched mirror 50cm wide x 70cm high	A9
Arched mirror 20x28" Polished nickel	US-A9N
Rectangle mirror 50cm wide x 70cm high	A11
Rectangle mirror 20 x 28" Polished nickel	US-A11N
Rectangle mirror 20 x 28" Stainless	US-A11V
Curved Mirror 70cm wide x 70cm high	A38

## Tools required:

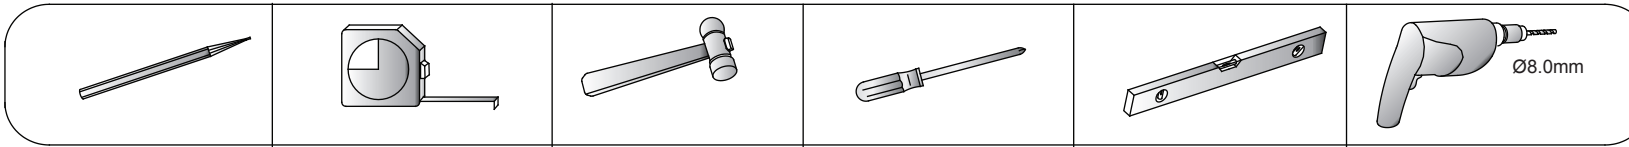

## Parts supplied:

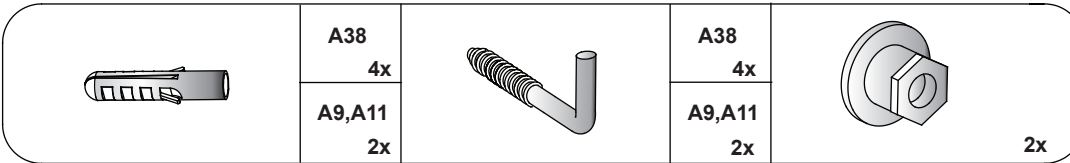

## Maintenance & Cleaning


The mirror edges are treated with a specially formulated sealant designed to protect the mirror edges from contaminants and discolouring. Failure to follow cleaning guidelines can/will remove the benefits of the sealant.

NEVER use products containing bleach, cleaners of a gritty or abrasive nature or so called "glass and mirror" cleaning products, that can be detrimental to the long lasting finish of the mirror.


ONLY use a clean dry or damp micro fibre cloth to clean the mirror and mirror frame.

- Determine the final installation position, mark the fixing hole positions in pencil.


**A9,A11**

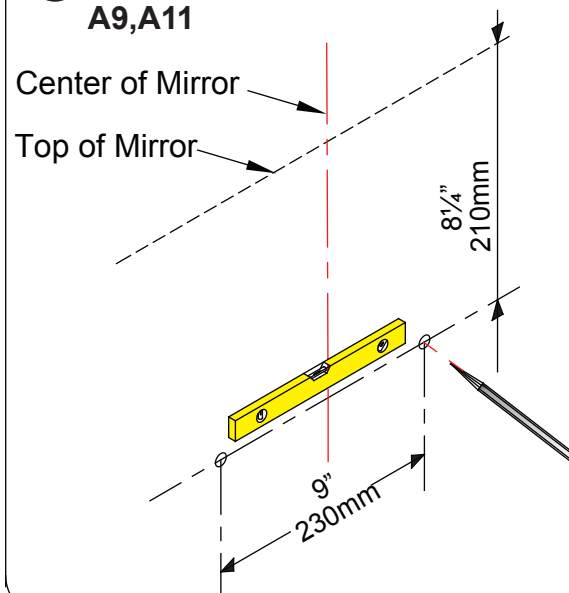


**A38**

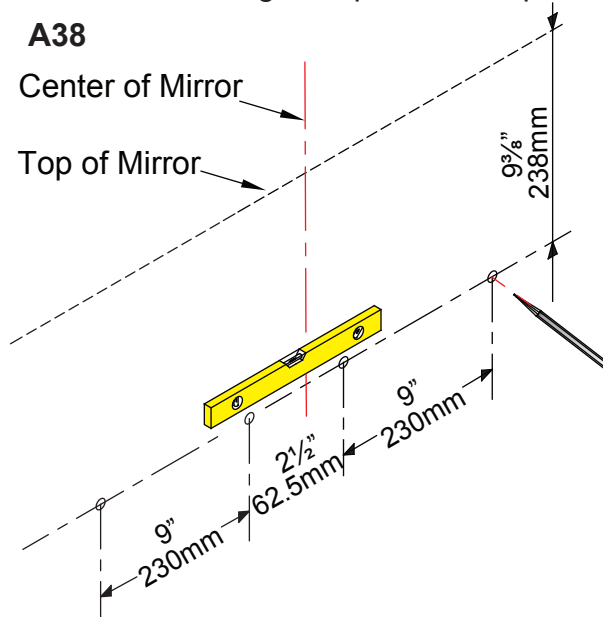


- Using a 8mm drill bit, drill holes on the marked positions. (note: In the event that the wall / floor fixings supplied being inappropriate for the wall / floor, please source alternatives).

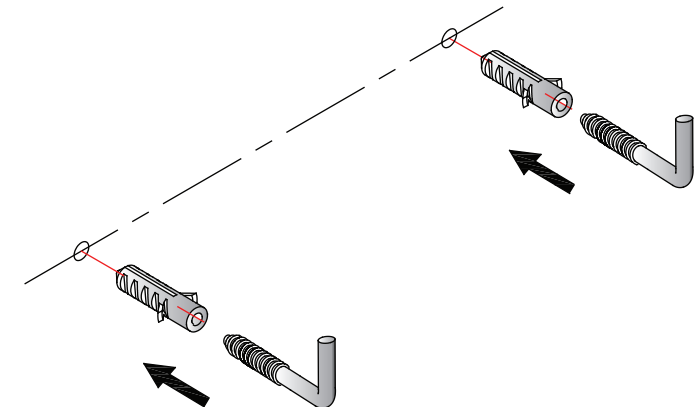


- ③ Keep the stainless screw exposed 8mm outside the wall.  
Mount the mirror onto the wall by hanging the bracket of mirror onto the exposed screws.

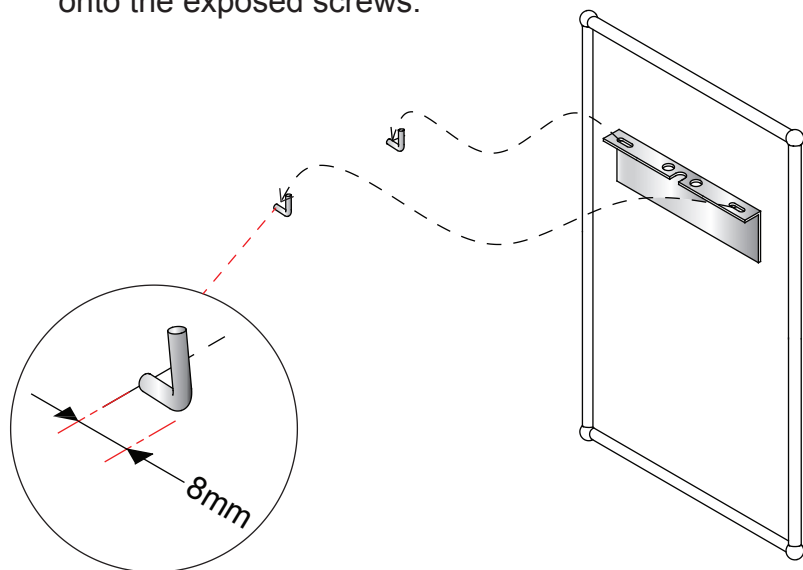

- ④ Check if it is stable.  
If not please readjust the exposed length of screws and use the washers supplied if needed.

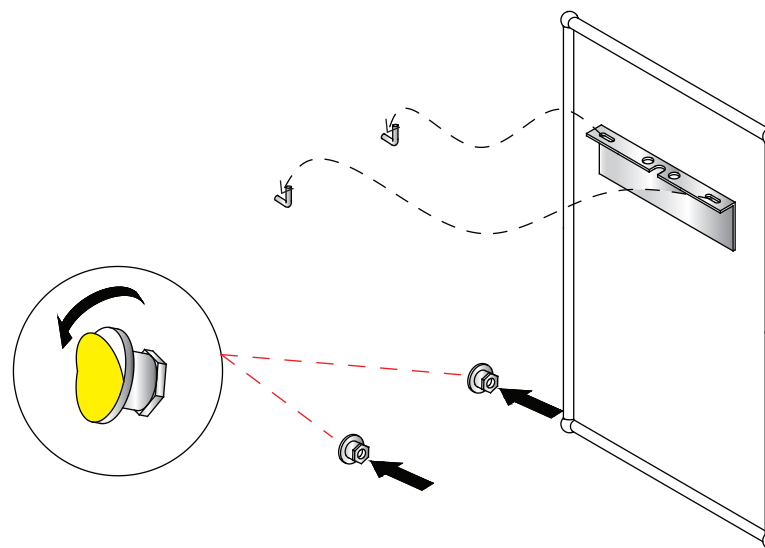

⑤

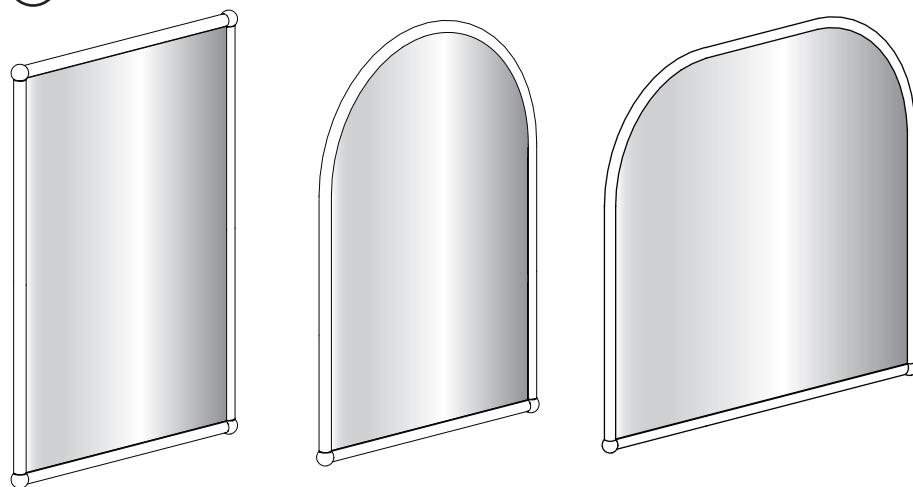

A11

A9

A38

For further information contact;

US:

Crosswater London, 393 Fortune Blvd., Milford, MA 01757  
Toll free number: 844-XWATER-1 (844-992-8371)  
Tel: 508-381-0433 fax: 508-381-6068  
Email: [technical@crosswaterlondon.com](mailto:technical@crosswaterlondon.com)  
Web: [www.crosswaterlondon.com](http://www.crosswaterlondon.com)

UK:

Bathroom Brands, Lake View House, Rennie Drive, Dartford,  
Kent, DA1 5FU  
Tel: 01322 473222  
E-mail: [Customerservice@bathroombrands.com](mailto:Customerservice@bathroombrands.com)  
Web: [www.bathroombrands.com](http://www.bathroombrands.com)