

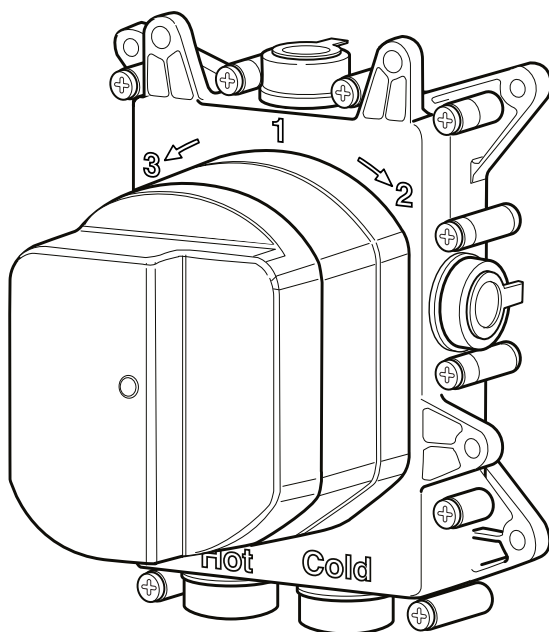



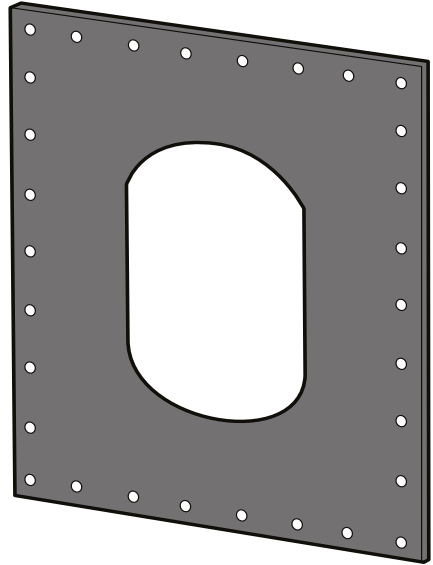

CROSSBOX

Mounting Instructions

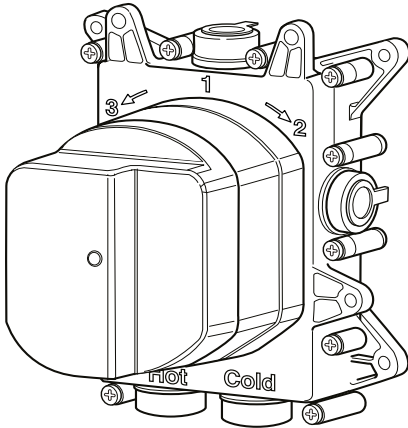

Mounting instructions



Pressure range min/max 0,5/5 bar

(in case of water pressure higher than 5 bar we recommend installing pressure reducers).

Recommended pressure 3 bar.

Operation:

Either with gas or electric accumulation boilers.

Centralised systems.

The product should only be installed by a suitably qualified plumber/installer.

<i>Safety lock at:</i>	41° C
------------------------	-------

<i>Min. Working temperature:</i>	3° C
----------------------------------	------

<i>Min. recommended:</i>	15° C
--------------------------	-------

<i>Max. Working temperature:</i>	70° C
----------------------------------	-------


<i>Max. recommended:</i>	65° C
--------------------------	-------



<i>Recommended thermal differential</i>	50° C
---	-------

Thermal disinfection is allowed.

Safety system with flow stop in case of lack of one of the two waters.

Warning: contact the plumber for the choice of the best water heating device.

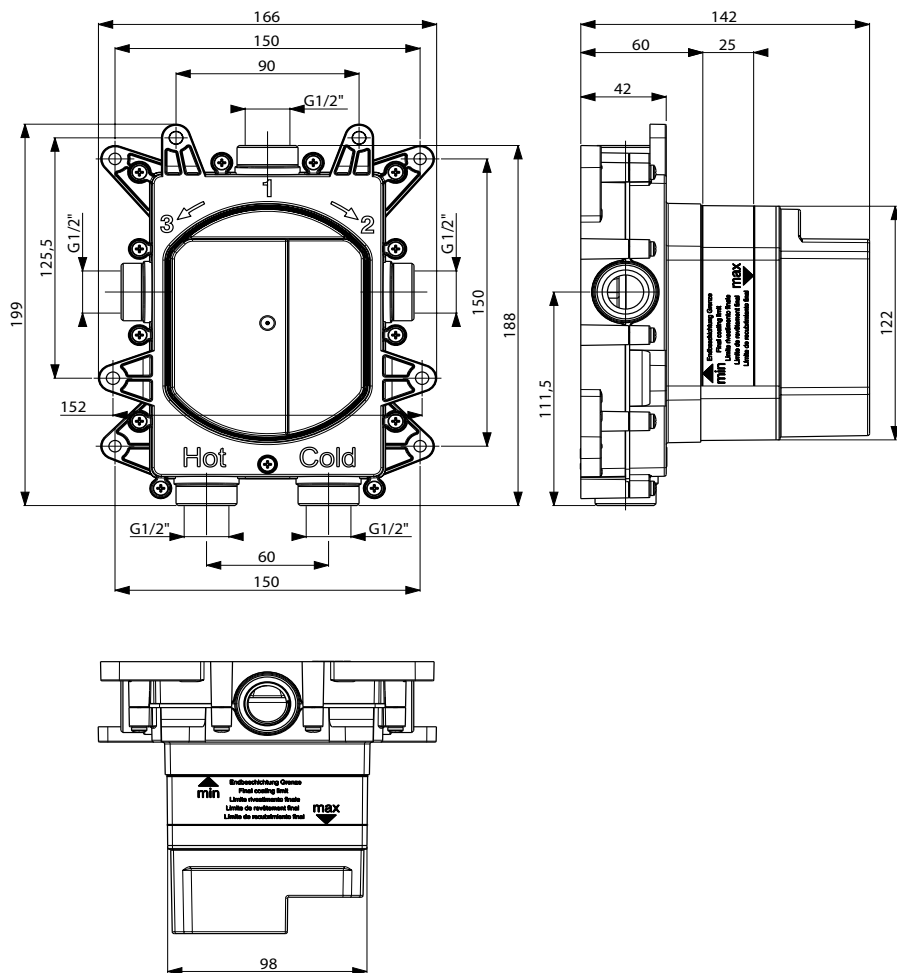


Press.	FLOW RATE (L/min)				
	Push button 2 ways				
					
	Exit 1		Exit 2		
	min.	max.	min.	max.	
	0,5	1,5	7,5	1,5	7,5
	1	2,3	11,3	2,3	11,2
	2	3,5	16,5	3,5	16
	3	4,5	20,5	4,5	20
	4	5,5	23,7	5,2	22,8
	5	5,7	26,5	5,7	25,5


Press.

FLOW RATE (L/min)


Push button 3 ways



Exit 1



Exit 2



Exit 3

bar

min. max.

min. max.

min. max.

0,5

1,8 8,1

1,8 7,7

1,8 7,7

1

2,7 11,8

2,6 11,5

2,6 11,5

2

3,9 16,8

3,9 16,7

3,9 16,7

3

4,8 20,7

4,8 20,5

4,8 20,5

4

5,5 24

5,5 23,7

5,5 23,7

5



6,2 26,7

6,2 26,6

6,2 26,6

**2 WAYS - ONLY PUSH VERSION**

ATTENTION:
indications valid only
for PUSH VERSION!

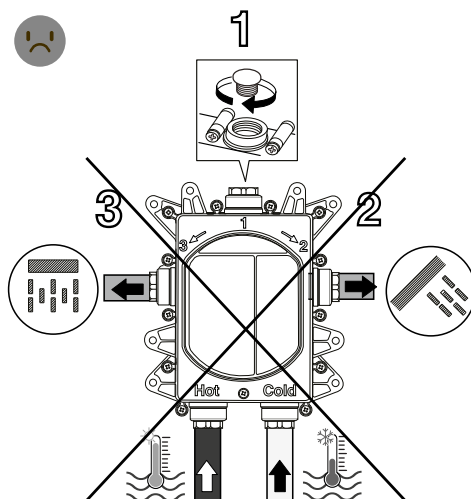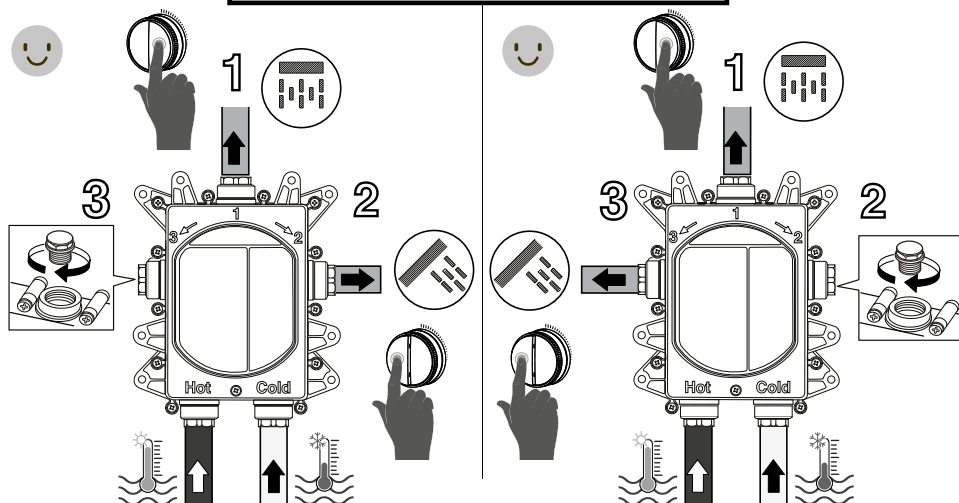

**3 WAYS - ONLY PUSH VERSION**



ATTENTION:
indications valid only
for PUSH VERSION!




1



3



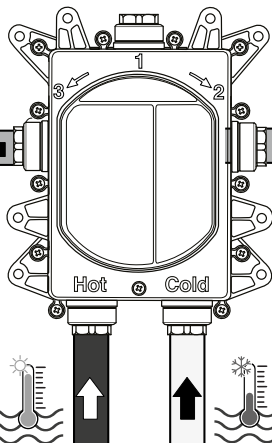






2



Press.


FLOW RATE (L/min)

bar	Term. 1 way		Term. 2 way	
				
	Exit 1/2/3	Exit 2	Exit 3	Mix
	8,2	8,2	8,2	9,2
	11,7	11,7	11,7	13,2
	16,7	16,4	16,4	18,7
	20,7	20	20	22,9
	24	23	23	26,4
	26,6	25,8	25,8	29,5




Press.	FLOW RATE (L/min)		
	Term. 3 ways		
			
	Exit 1	Exit 2	Exit 3
	bar		
	0,5	9,4	8,1
	1	13,4	11,6
	2	19,2	16,6
	3	23,7	20,5
	4	27,4	23,8
	5	30,5	26,6



ATTENTION:
indications valid only
for **OTHER VERSIONS!**


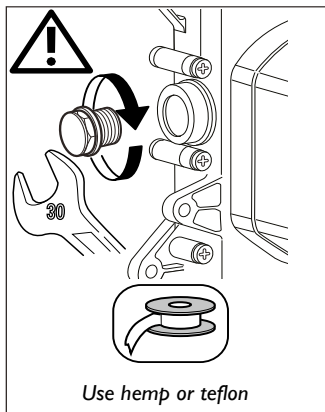


1 way

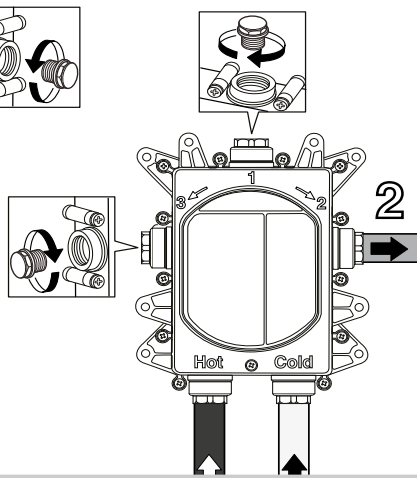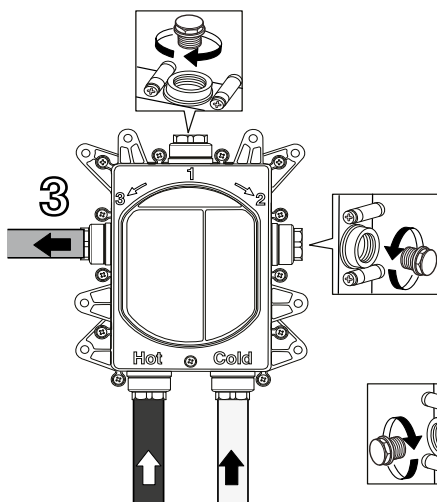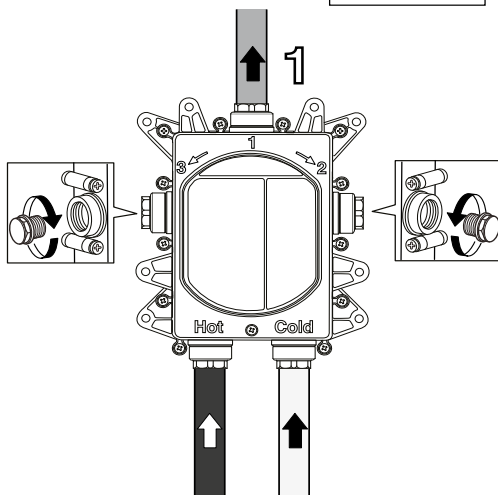






ATTENTION:
indications valid only
for **OTHER VERSIONS!**

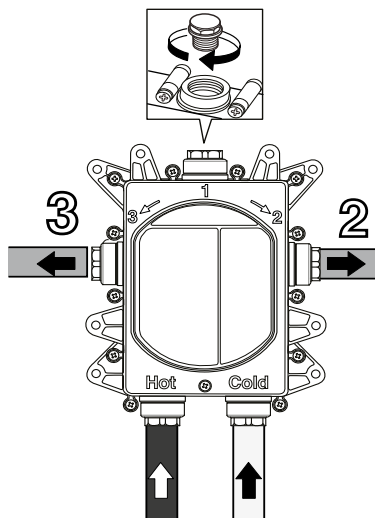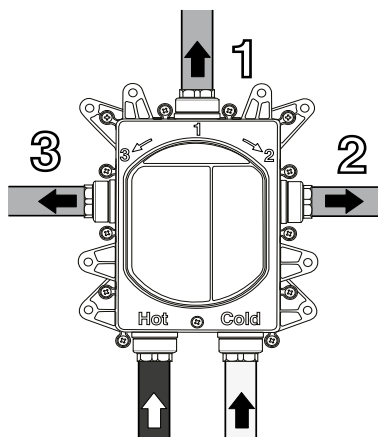2 ways**3 ways**




min. 250 mm

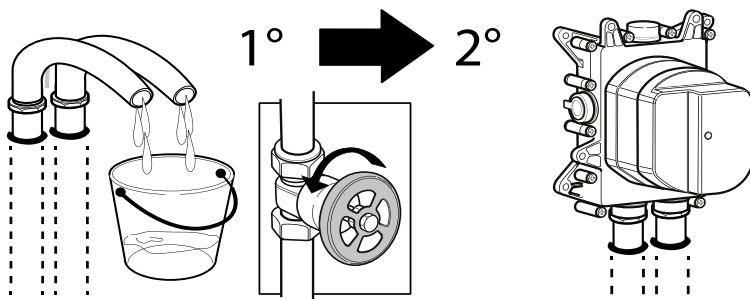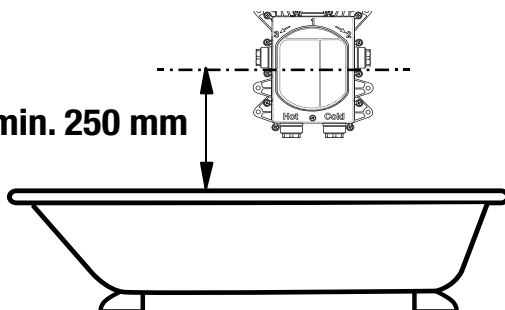





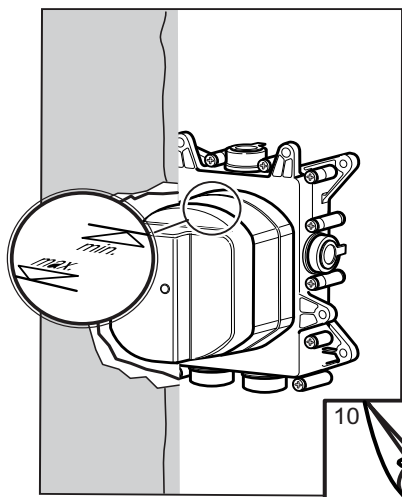




Mounting on plasterboard wall

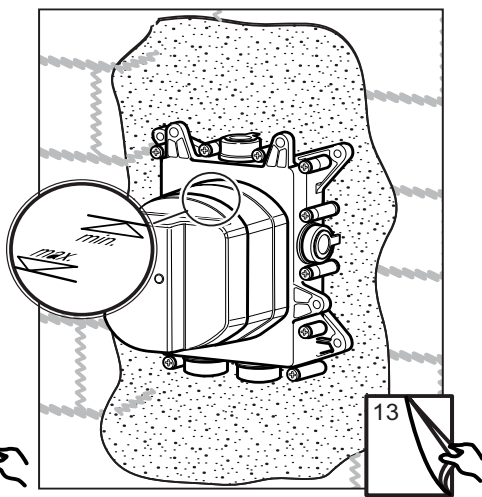


Wall mounting

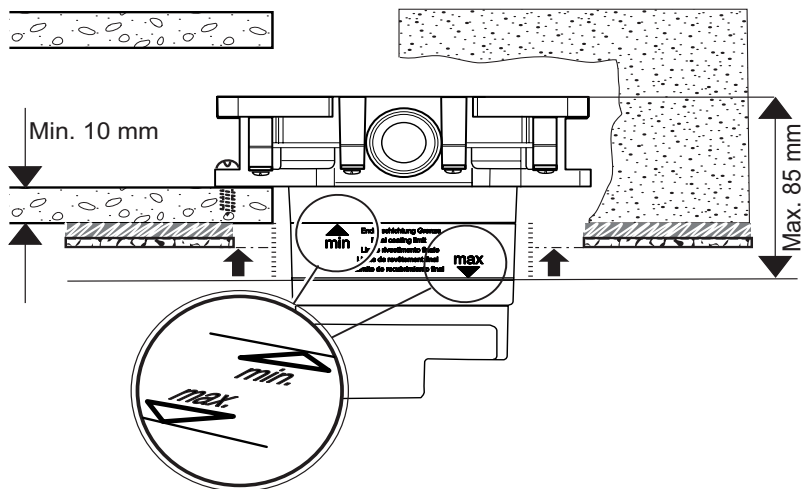

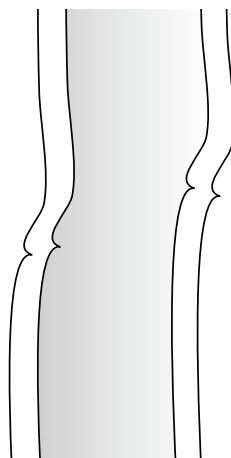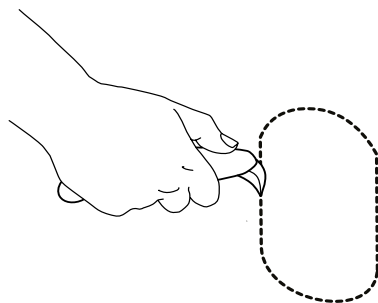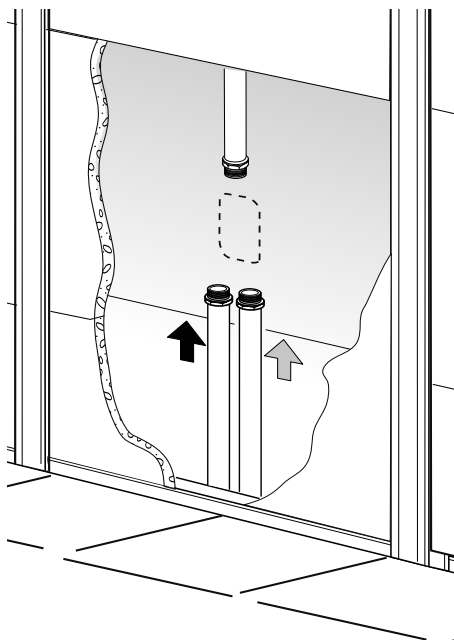


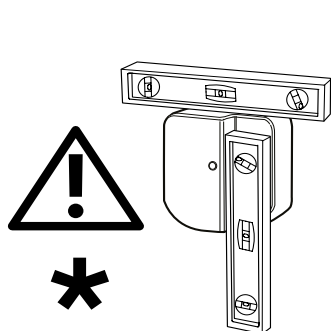


OK




NO




OK




NO







OK







NO


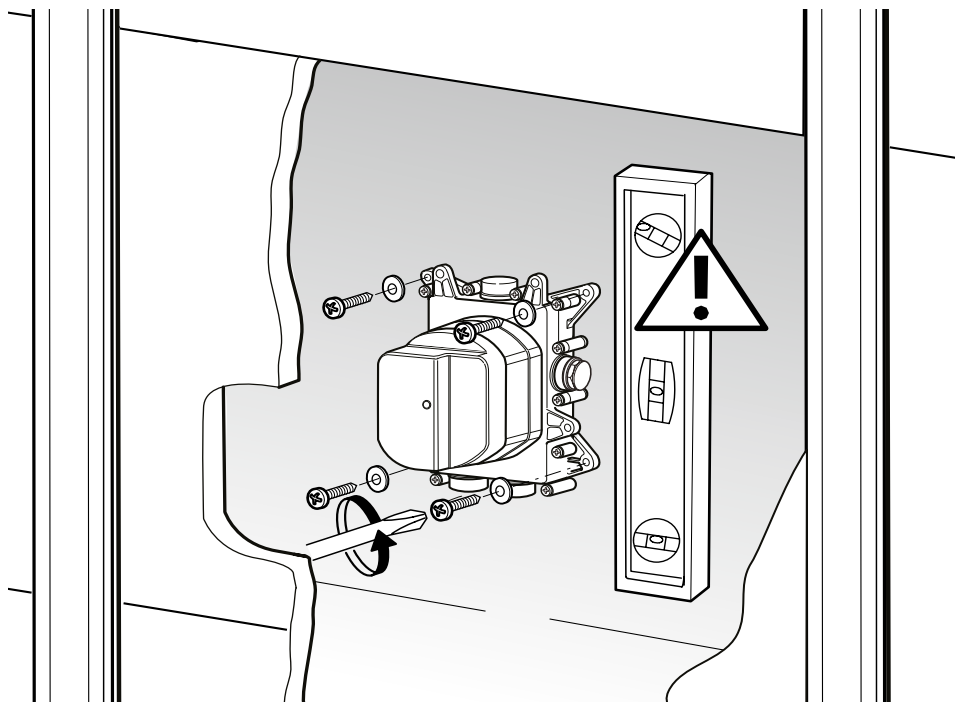



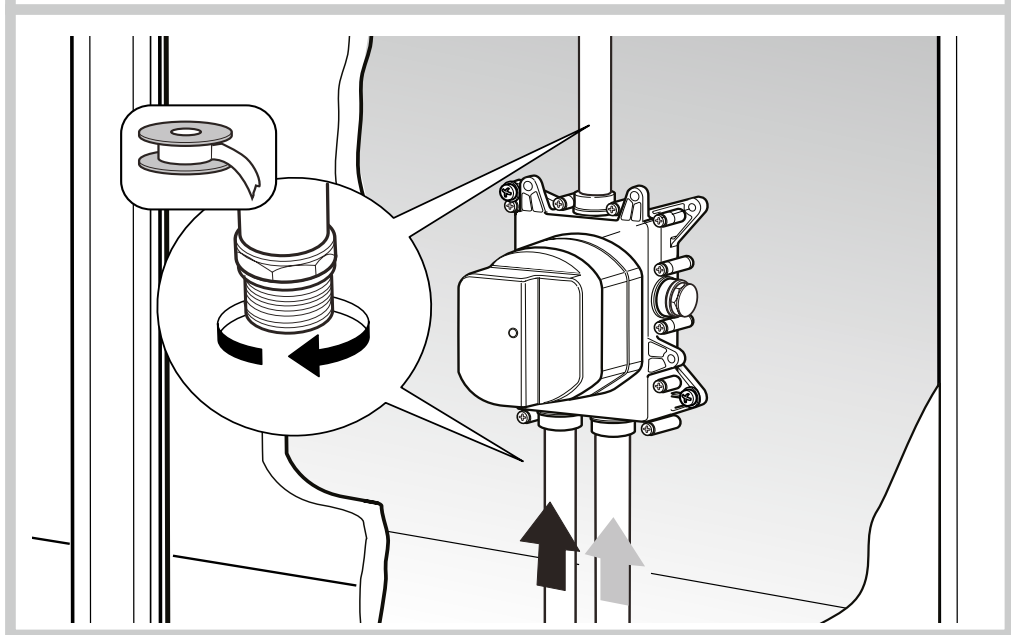
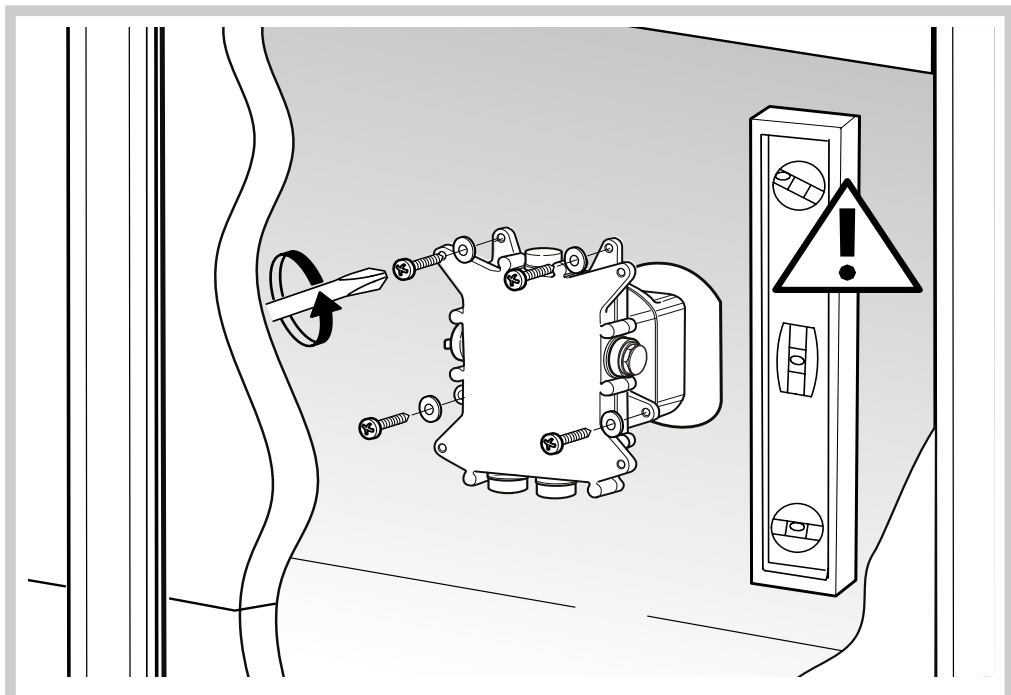


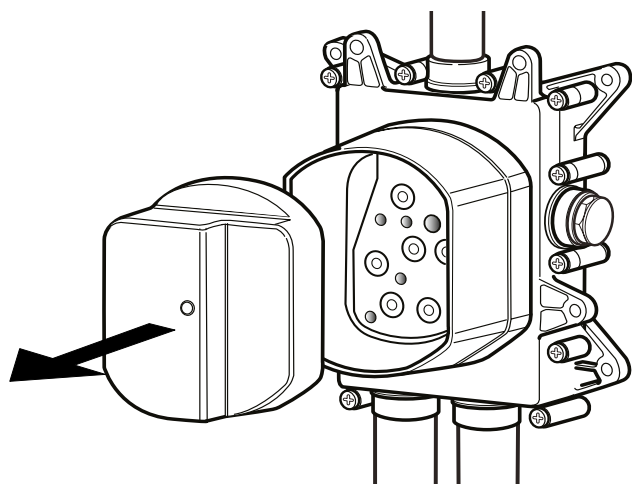
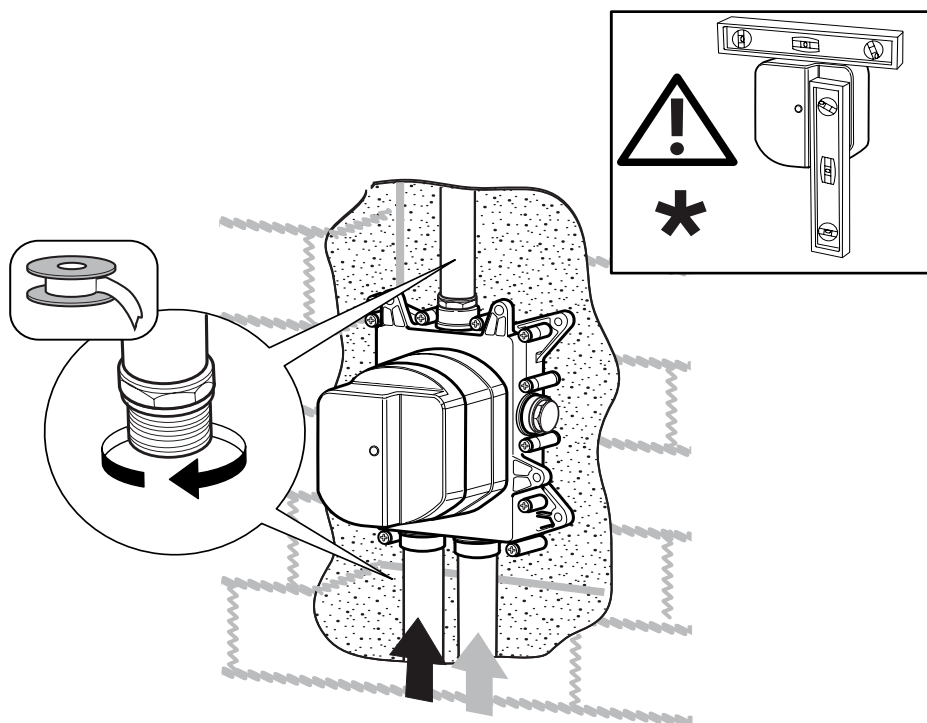


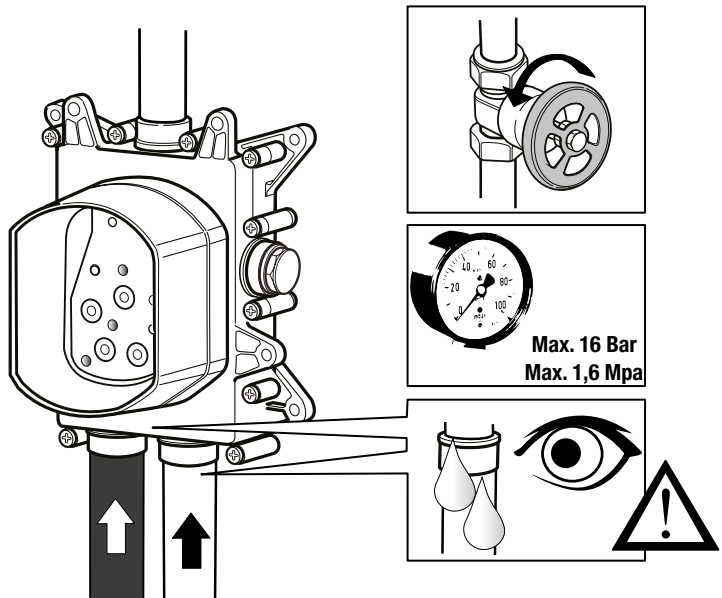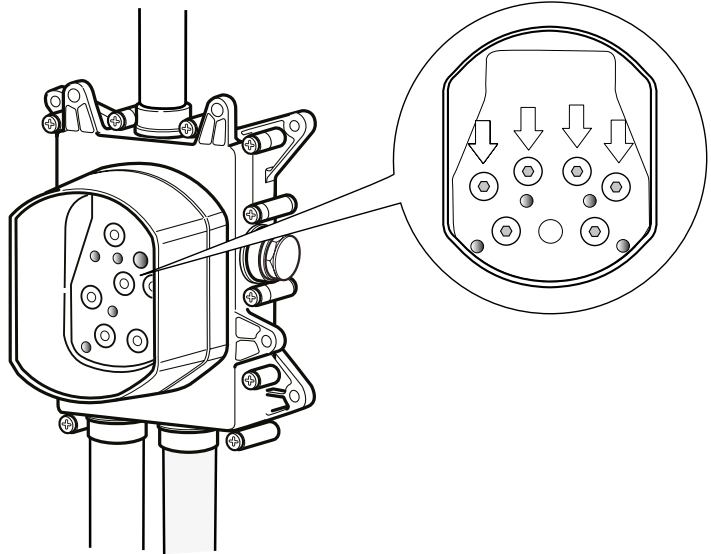

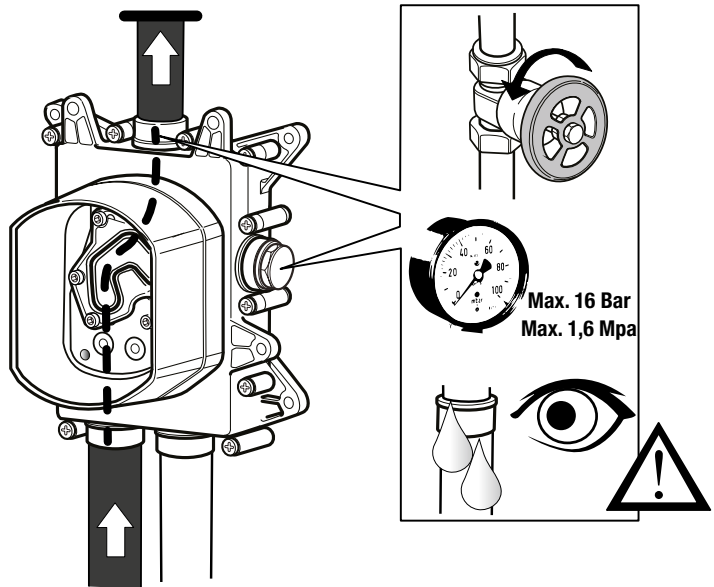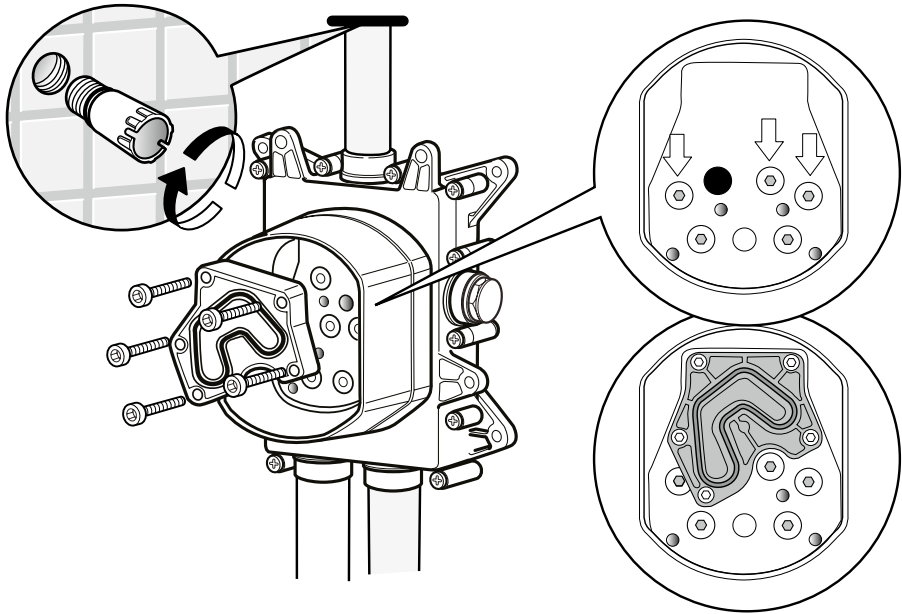



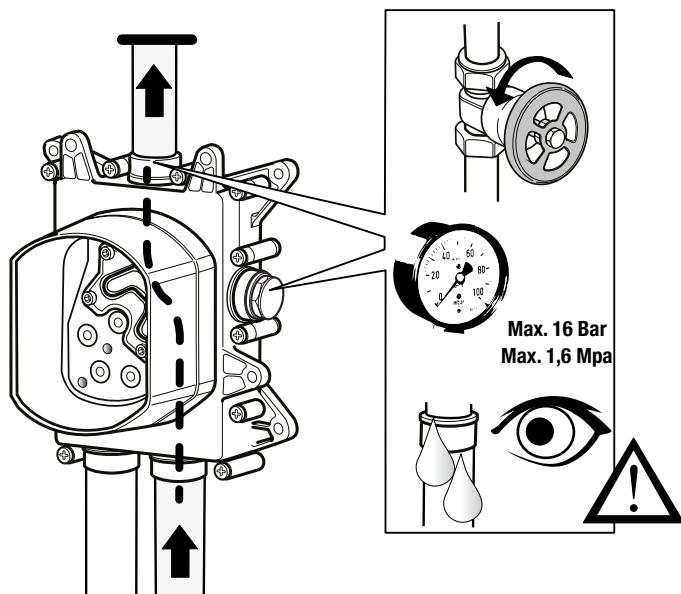
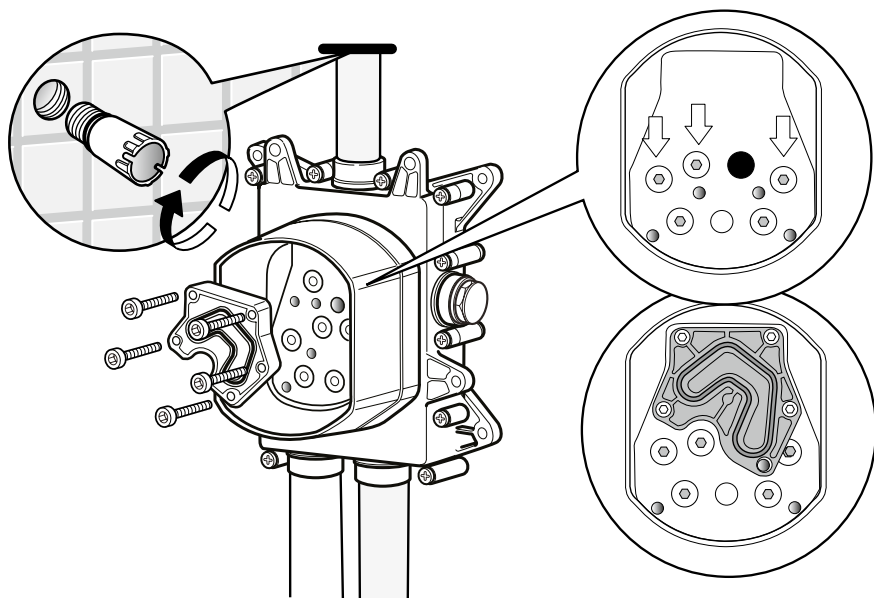


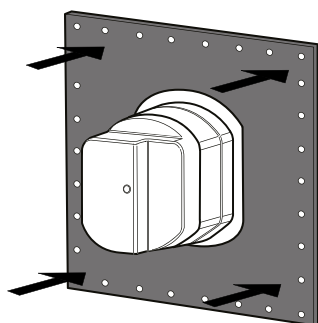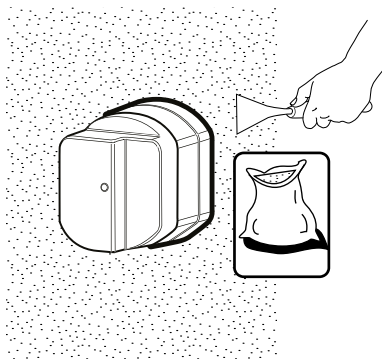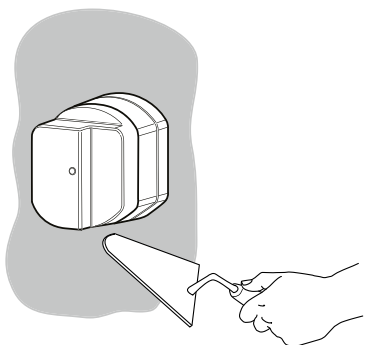

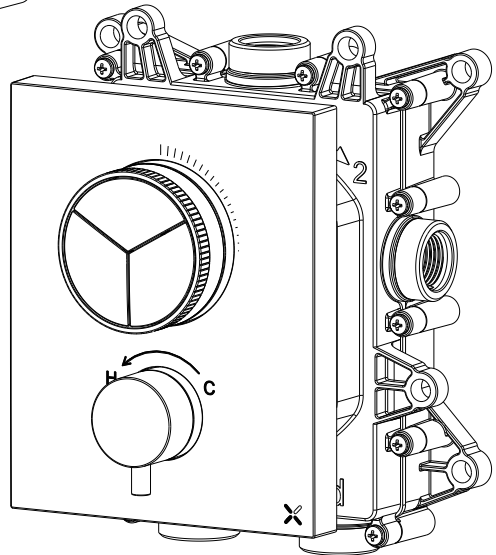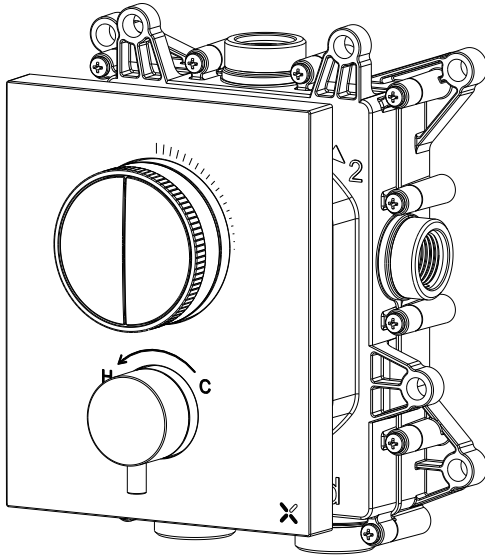

Completion Concealed Box

Mounting Instructions

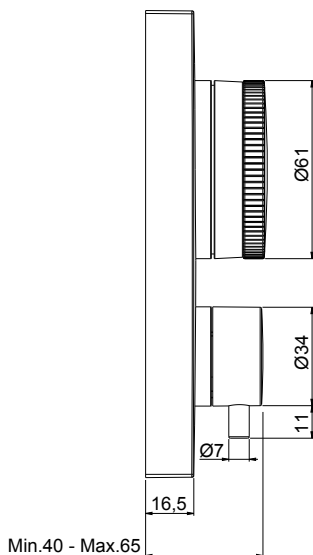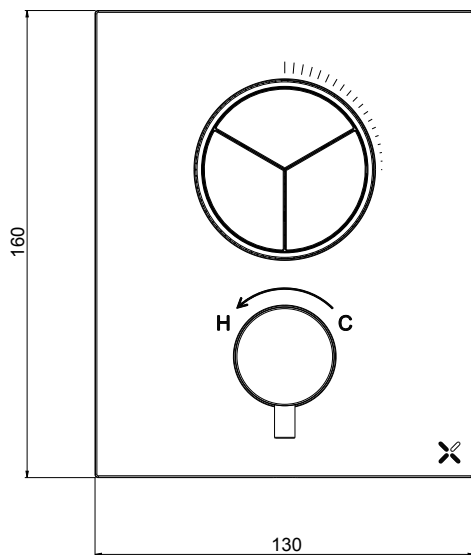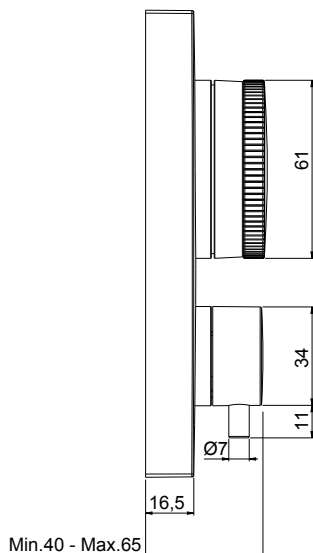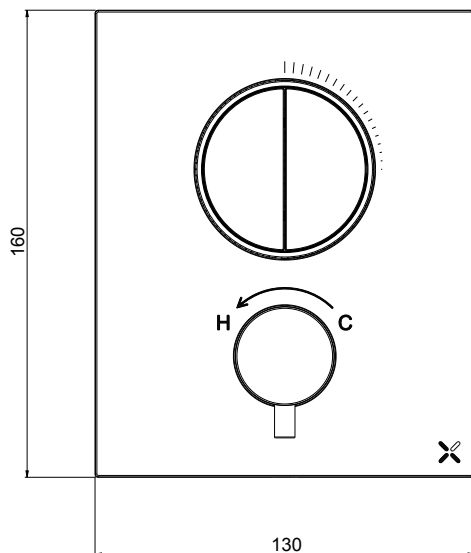

Pressure range min/max 0,5/5 bar
(in case of water pressure higher than 5 bar we recommend installing pressure reducers).

Recommended pressure 3 bar.

Operation:

Either with gas or electric accumulation boilers.

Centralized systems.

The product should only be installed by a suitably qualified plumber/installer.

Safety lock at: 41°

Min. Working temperature: 3°C

Min. recommended: 15°C



Max. Working temperature: 70°C




Max. recommended: 65°C



Recommended thermal differential 50°C

Thermal disinfection is allowed. Safety system with flow stop in case of lack of one of the two waters.






Warning: contact the plumber for the choice of the best water heating device.

Press.	FLOW RATE (L/min)			
bar	Push button 2 ways			
	 Exit 1		 Exit 2	
	min.	max.	min.	max.
	1,5	7,5	1,5	7,5
	2,3	11,3	2,3	11,2
	3,5	16,5	3,5	16
	4,5	20,5	4,5	20
4	5,5	23,7	5,2	22,8
5	5,7	26,5	5,7	25,5

Press.	FLOW RATE (L/min)					
bar	Push button 3 ways					
						
	Exit 1		Exit 2		Exit 3	
	min.	max.	min.	max.	min.	max.
	1,8	8,1	1,8	7,7	1,8	7,7
	2,7	11,8	2,6	11,5	2,6	11,5
	3,9	16,8	3,9	16,7	3,9	16,7
	4,8	20,7	4,8	20,5	4,8	20,5
	5,5	24	5,5	23,7	5,5	23,7
5	6,2	26,7	6,2	26,6	6,2	26,6










THERMOSTATIC 2-3 WAYS





Mounting instructions



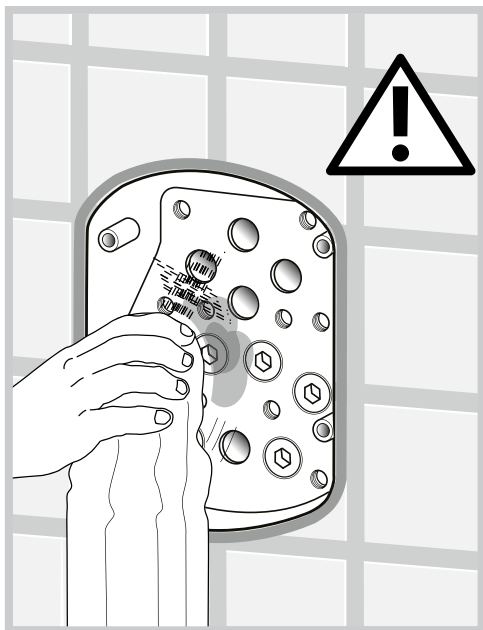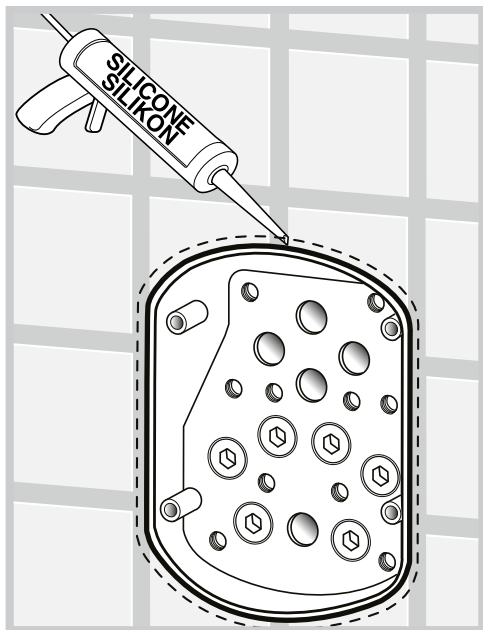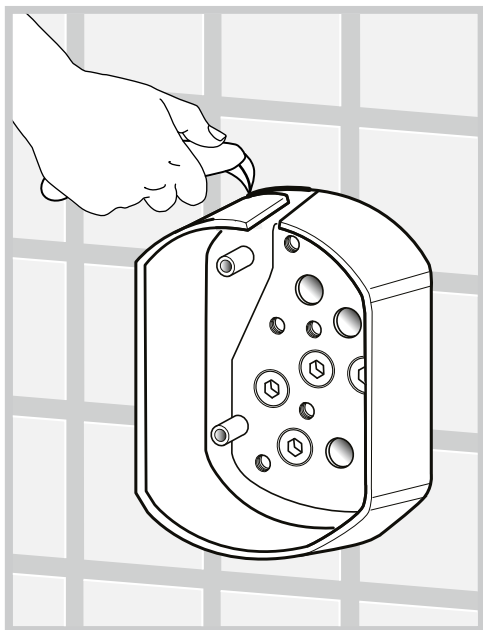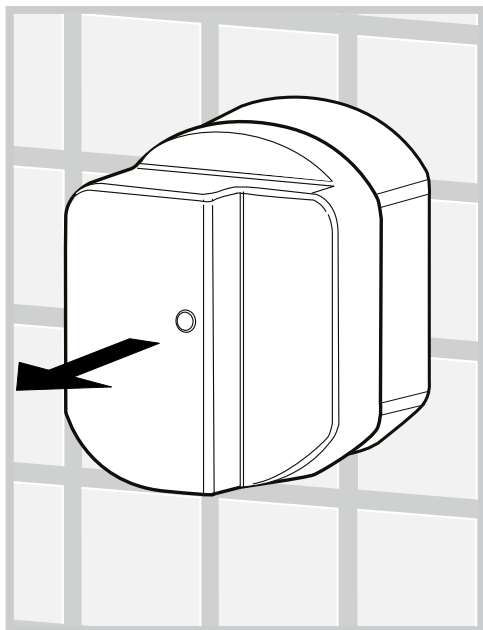





CLOSED




1


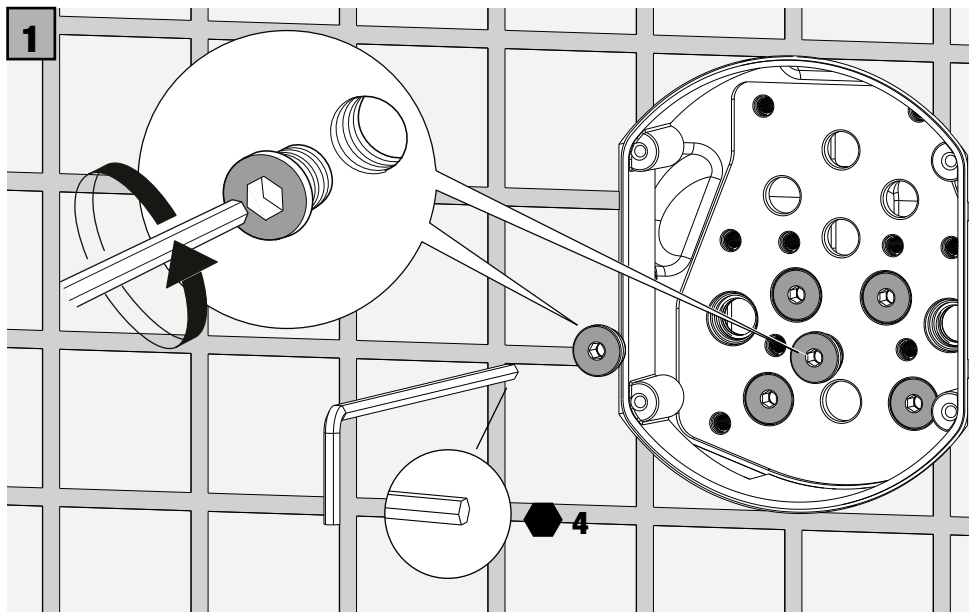


2

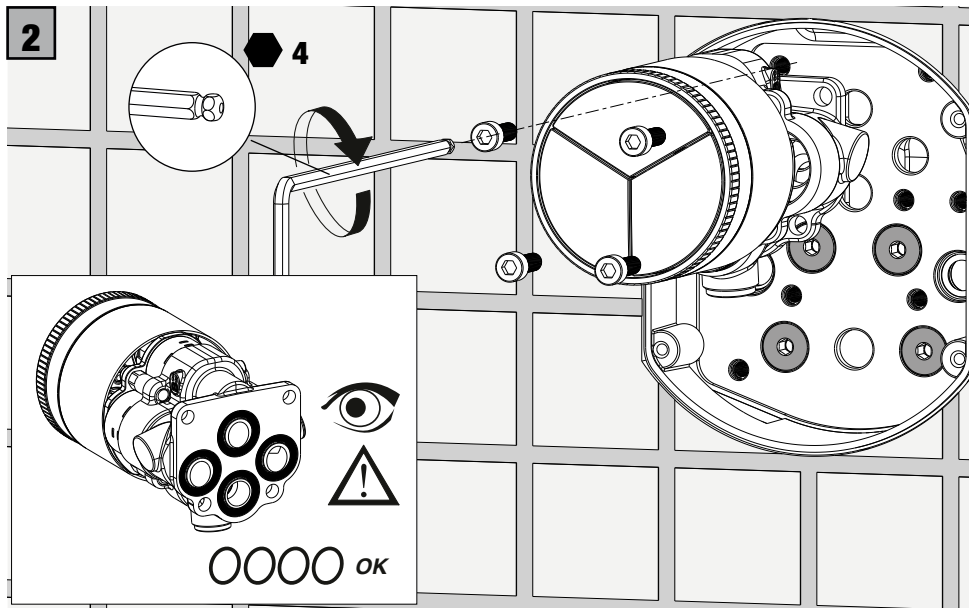






CLOSED








3

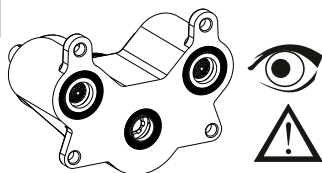


000 OK

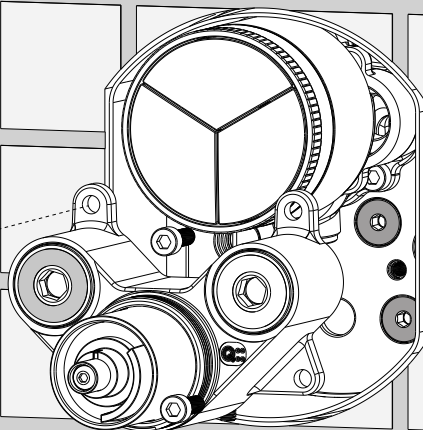



4

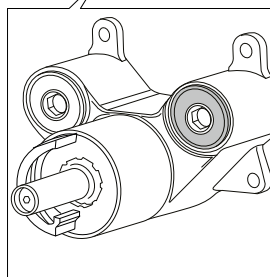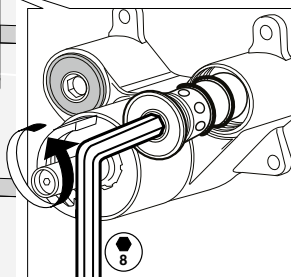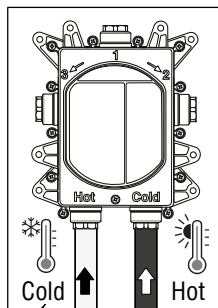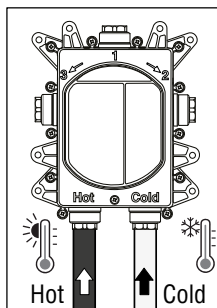
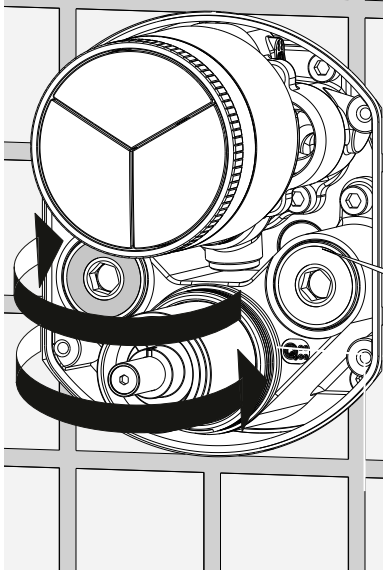






CLOSED



5

hoch
tophaut
alto

6



H


C




SOAP





Run liquid soap over the O-rings to facilitate plate's insertion



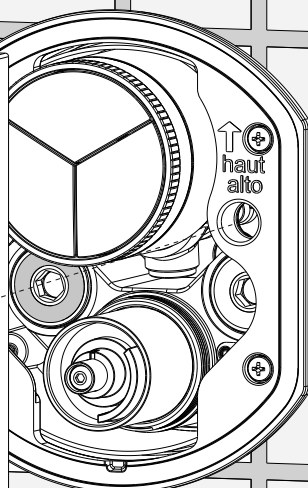
haut
alto




OPEN




7

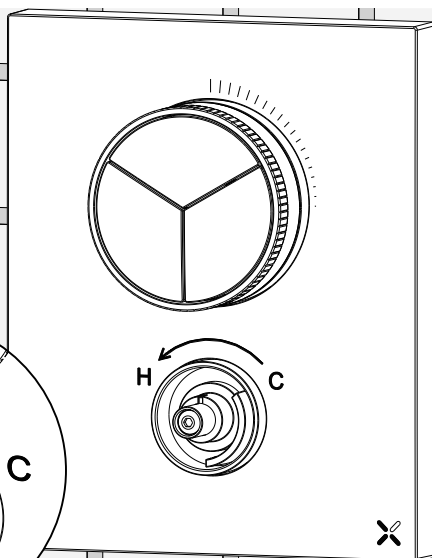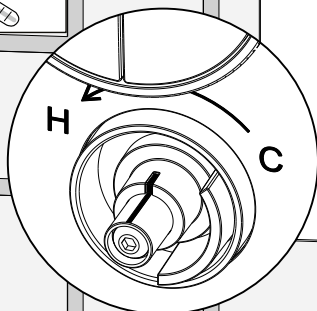


8


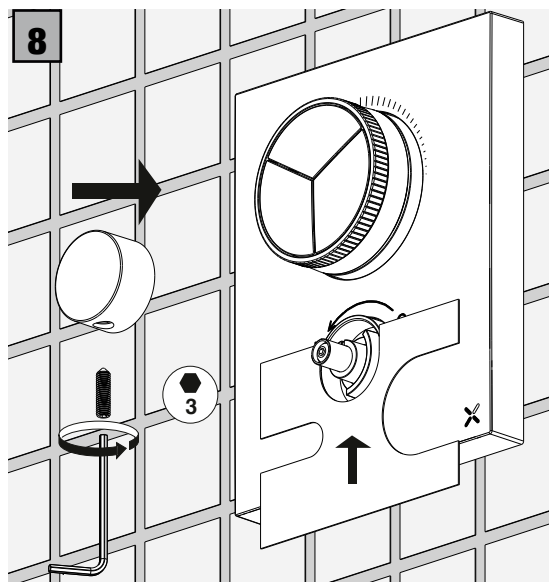


9

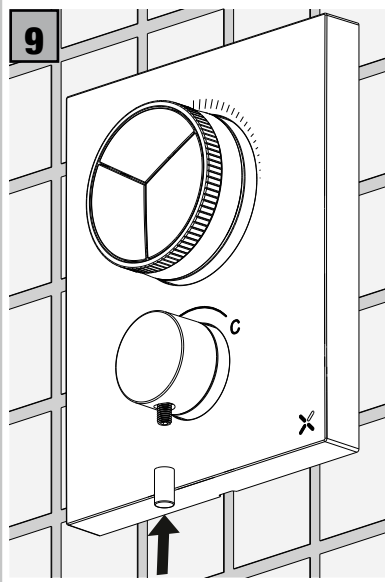








CLOSED




1


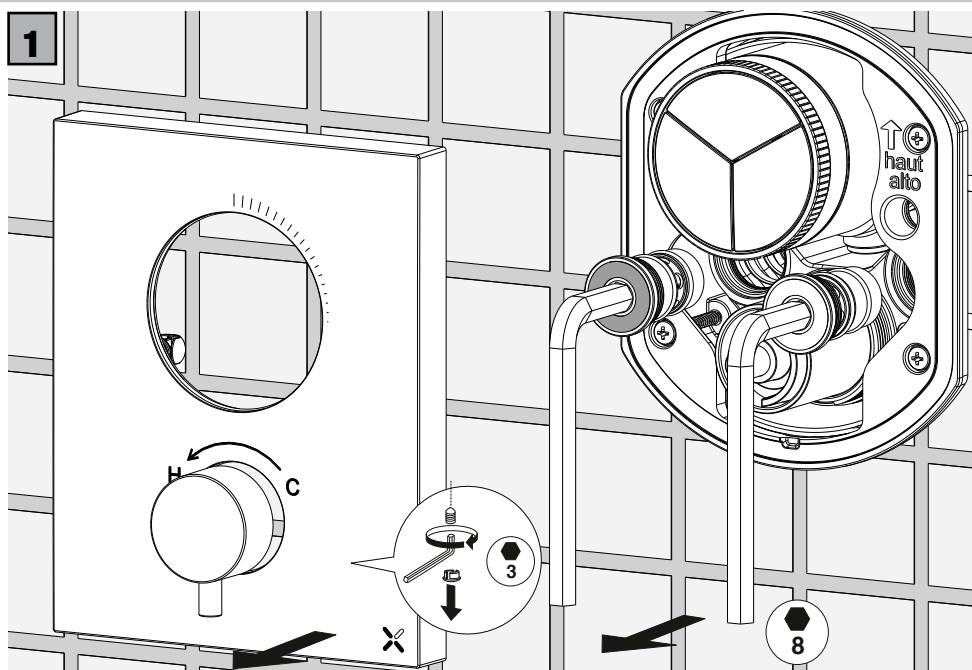


2

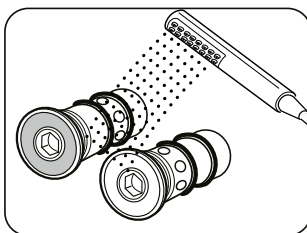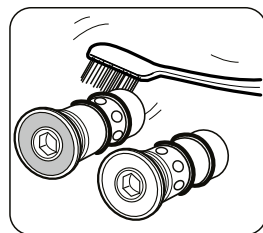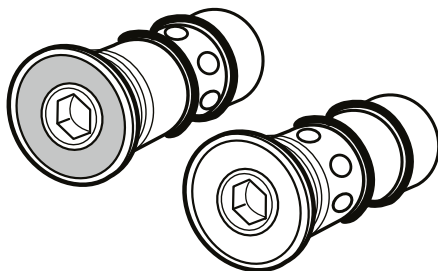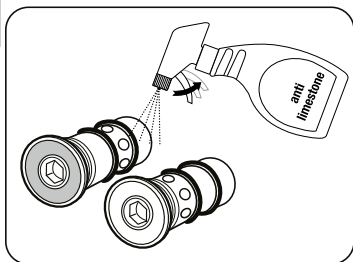







OPEN

**THERMOSTATIC 2 WAYS**


stop





1 way

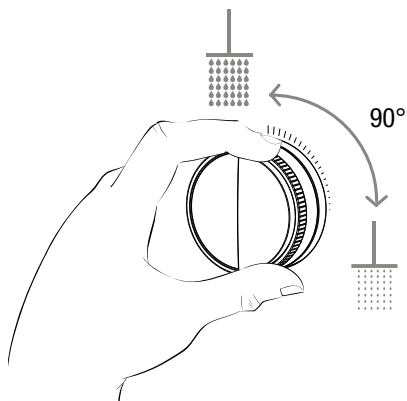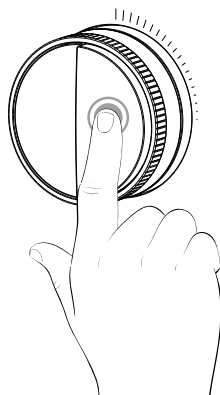


stop




2 way

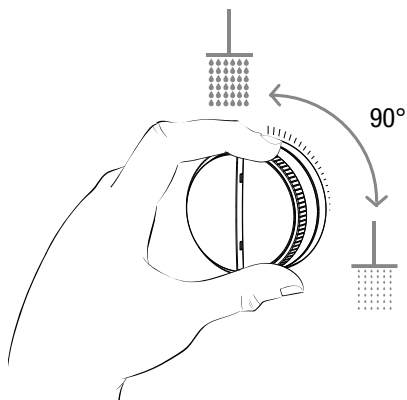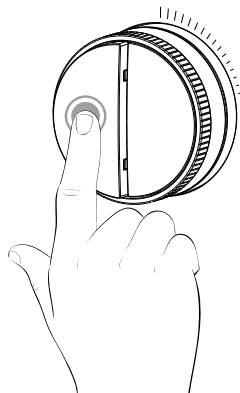







OPEN




THERMOSTATIC 3 WAYS






stop

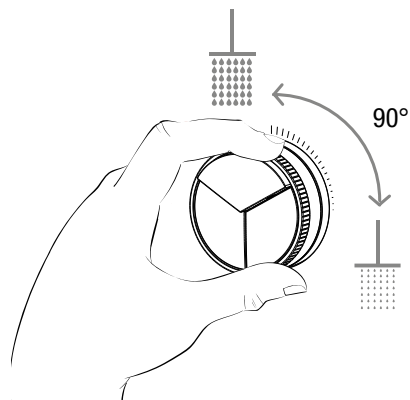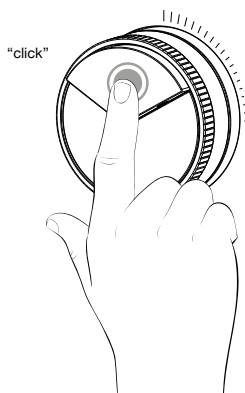


1 way






stop

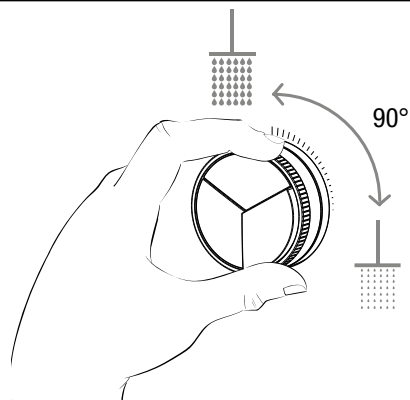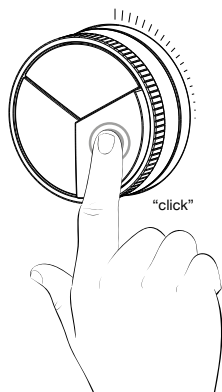

2 way



stop

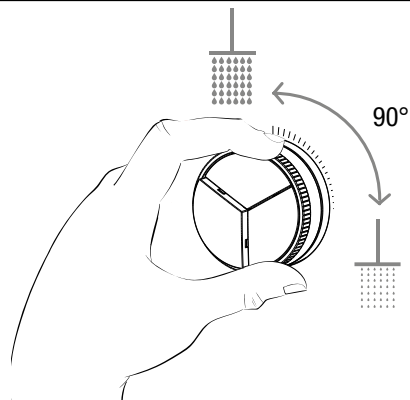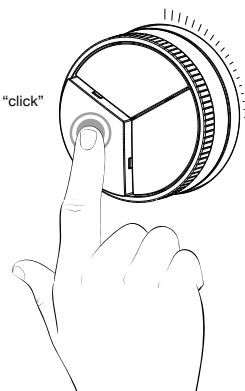

3 way

EN I CLEANING

Clean surfaces using only water or neutral detergents and dry with a soft cloth.

Never use abrasive or corrosive detergents or products containing hydrochloric acid, phosphoric acid, ammonia or bleach.

Do not use sponges or abrasive cloths.

It is recommended to clean the surfaces periodically, in order to not create situations of excessive dirt which is difficult to eliminate.


ATTENTION: the use of not-recommended products may irreparably deteriorate surfaces.

BRITTON®

INSTALLATION INSTRUCTIONS

HOXTON SHOWER SET WITH OUTLET ELBOW

HOX.053



Important

- We recommend that this product is installed by a qualified professional plumber who is certified by NVQ (National Vocational Qualification) or SNVQ (Scottish National Vocational Qualification) Level 3.
- Please check this product upon delivery to ensure that it has not been damaged and is complete.
- Before installation, please make sure this product is the correct model and you have all the parts required for installation and use.
- If possible the shower kit should be supplied with hot and cold water at balanced pressure.
- It is important to flush the water system to ensure that no swarf, solder, or any other impurity or foreign body can enter the shower kit.
- Turn off the water supply before commencing work, this should be done at the isolating valves or inlet feeds if fitted, or otherwise at the main stopcock.
- Please read these instructions carefully and keep it for future reference.

Working pressure

The shower set is suitable for high pressure installation. The recommended minimum work pressure is 1 bar. The maximum work pressure is 5 bar. If the mains pressure is over 5 bar, then a flow regulator should be fitted.


Warning

Please check for any hidden pipes or cables before drilling holes in the wall.
When using Power tools always follow the manufacturers user instructions.


Cleaning

We do NOT recommend you use any household cleaners to clean the product. Because these cleaners change substance or formula too frequently. So product should be always cleaned only with soapy water and rinsing with clean water and drying with soft cloth.

Dimension

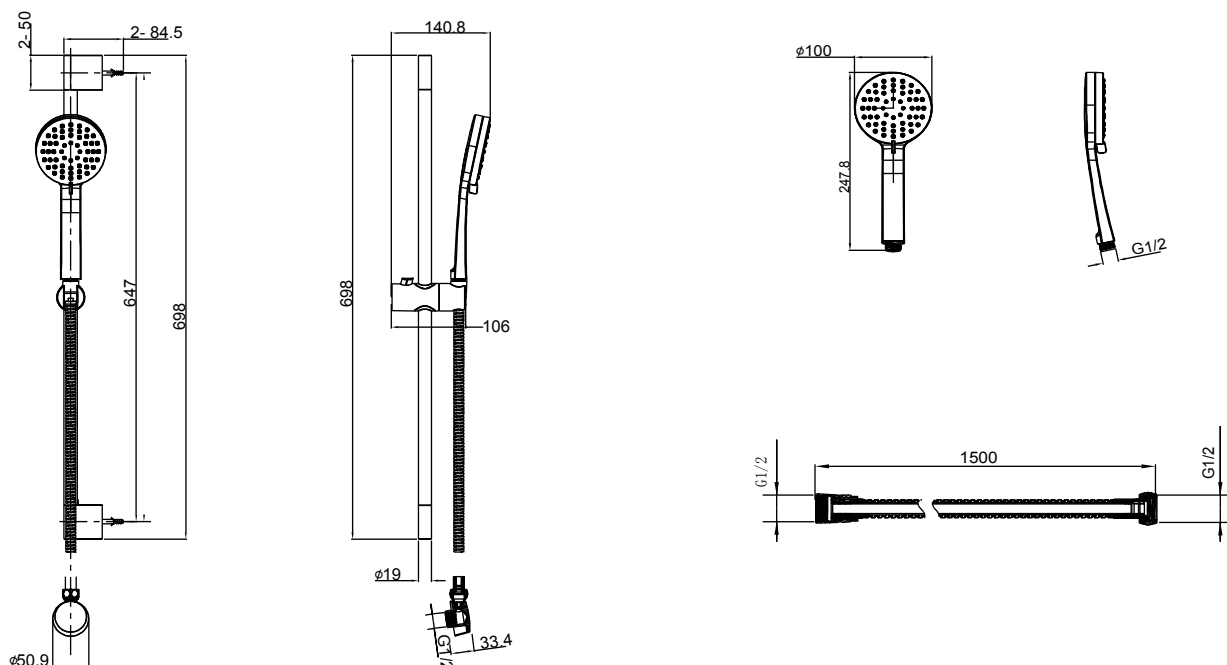


Dimension

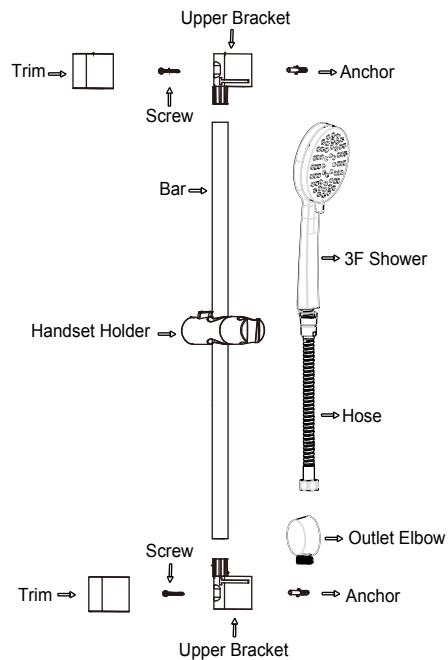


Tools Required (Not Supplied)

Drill, 6mm Masonry drill bit, Cross-head screwdriver, Spirit level, Pencil, Wrench.


Installation

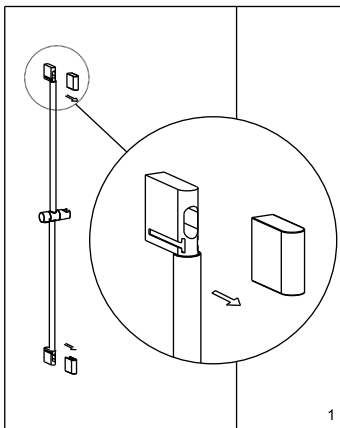


1. Loosen two trims but do not remove them. Place the bar to the wall vertically.

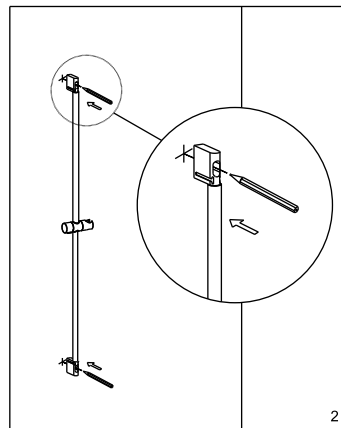


2. Mark two fitting holes .

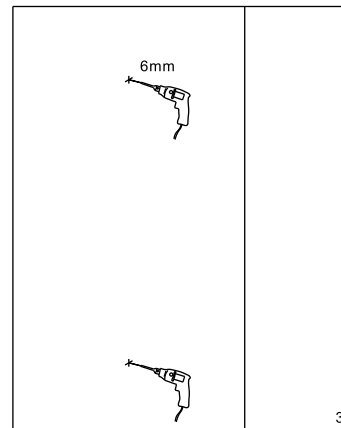


3. Drill two fitting holes by using a 6mm masonry drill bit.

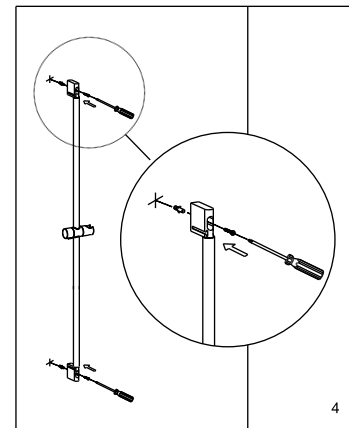


4. Fix the bar to the wall with anchors and screws.

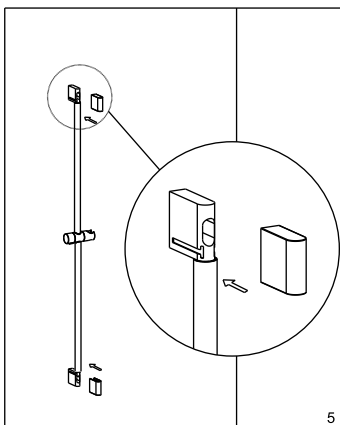


5. Assemble two trims back to brackets.

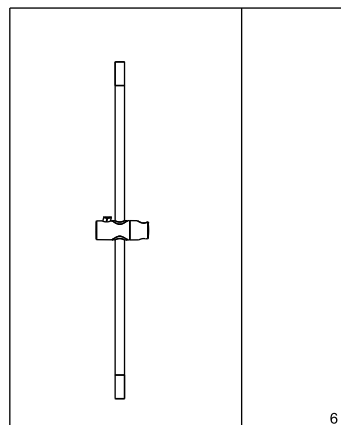

6. Complete the assembly of bar set.

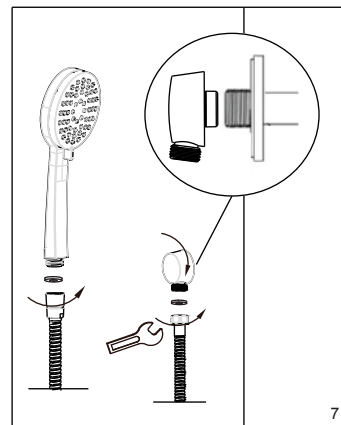

7. Tighten the elbow into the outlet. Connect two ends of shower hose to the elbow and the handset.

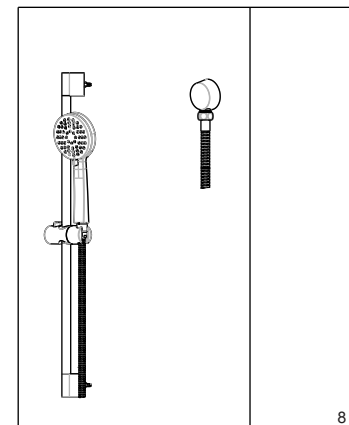

8. Done.