

MOD1500/1701/2500/3701/440R

MOUNTING INSTRUCTIONS

1 TECHNICAL FEATURES

Pressure range min/max 0,5/5 bar
(in case of water pressure highter than 5 bar weeracommend installing pressure reducers).
Recommended pressure 3 bar.

Operation:
Either with gas or electric accumulation boilers.
Centralised systems.


Safety lock at:	41° C
Min. Working temperature:	3° C
Min. recommended:	15° C
Max. Working temperature:	70° C
Max. recommended:	65° C
Recommended thermal differential	50° C


Thermal disinfection is allowed.

Safety system with flow stop in case of lack of one of the two waters.


Warning: contact the plumber for the choice of the best water heating device.


2 TECHNICAL INFORMATION

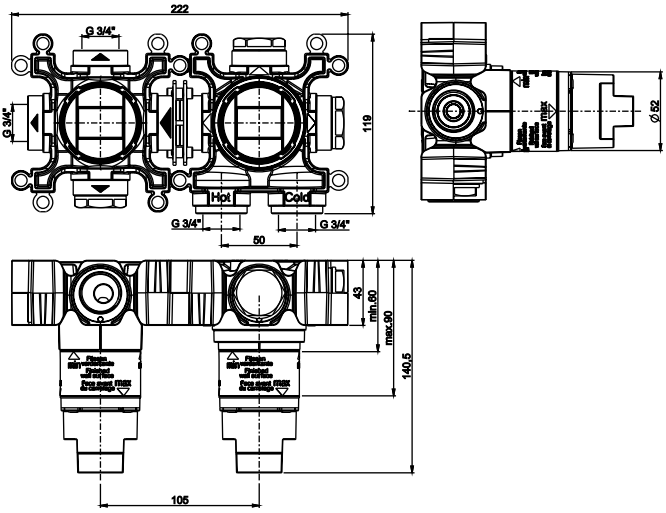

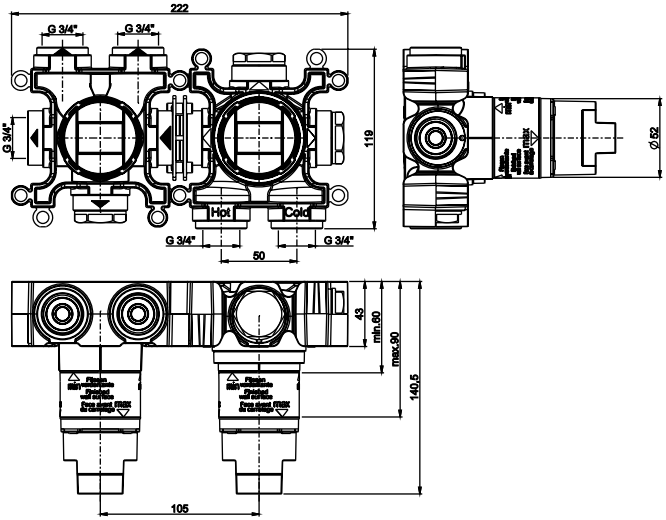





3 TECHNICAL INFORMATION



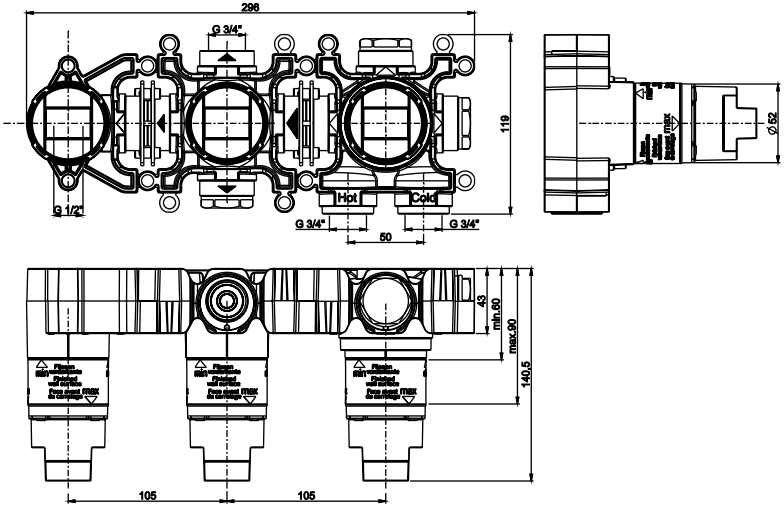


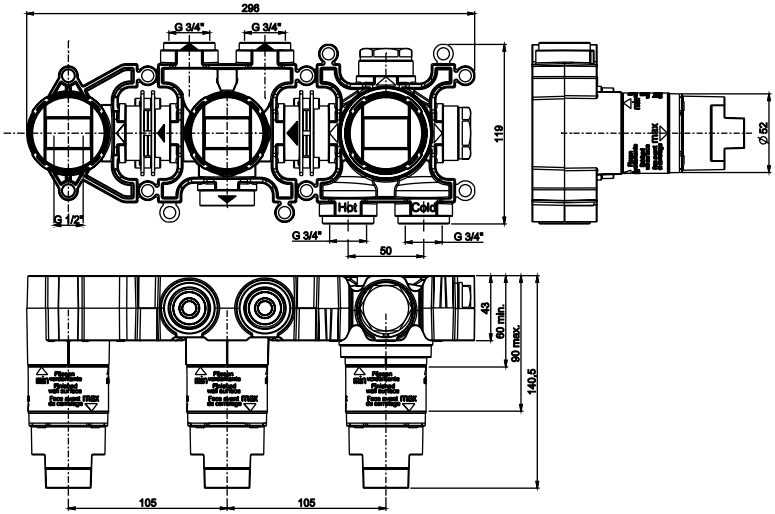

4 TECHNICAL INFORMATION

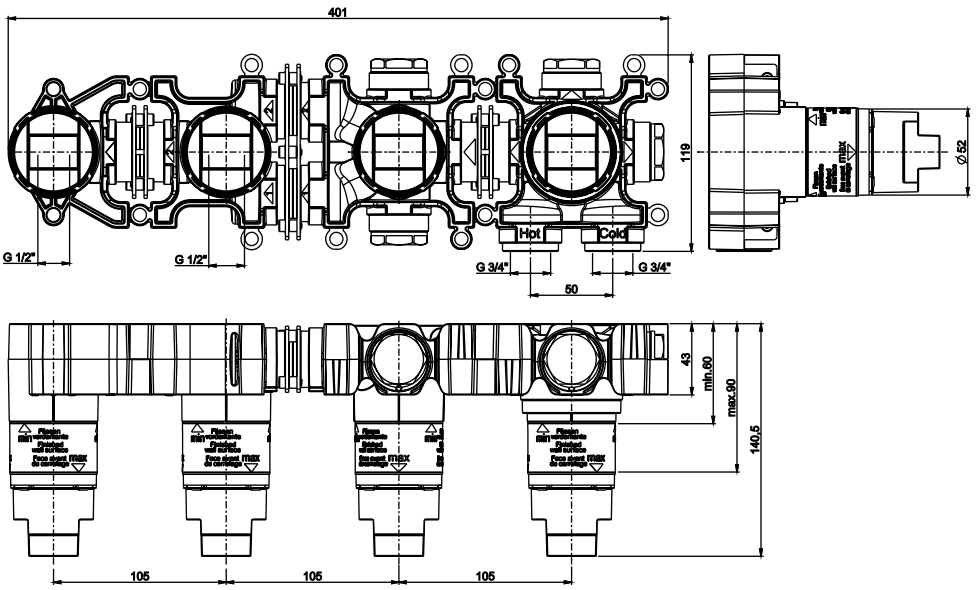


MODULE 2 CONTROL DIVERTER 2-WAY			
			
press.	flow-rate L/min.		
bar	Exit 1	Exit 2	Exit 1+2
0,5	9,2	9,2	9,7
1	13	13	13,7
2	18,7	18,7	19,7
3	23	23	24,2
4	26,5	26,5	28
5	29,5	29,5	31,4



MODULE 2 CONTROL DIVERTER 3-WAY			
			
press.	flow-rate L/min.		
bar	Exit 2	Exit 1	Exit 3
0,5	10	10	9,7
1	13,6	13,7	13,4
2	19,2	19,5	19
3	23,4	23,8	23,3
4	27	27,5	26,8
5	30	30,5	29,8

7 TECHNICAL INFORMATION


MODULE 2 CONTROL 2-WAY TRIMSET WITH HANDSHOWER

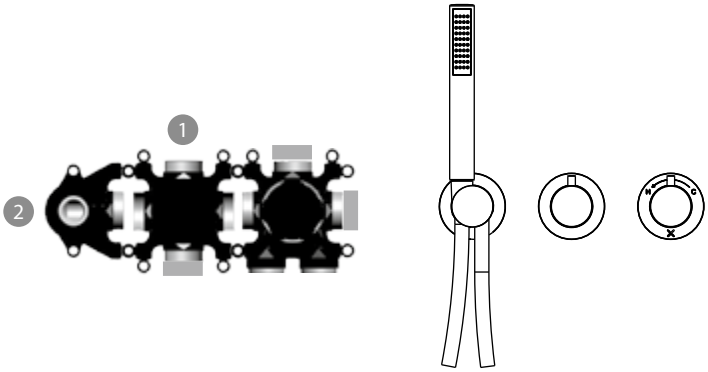



press.	flow-rate L/min.		
bar	Exit 1	Exit 2 for Shower	Exit 1+2
0,5	9,2	4,2	9,3
1	13	6	13,4
2	18,7	8,5	19
3	23	10,7	23,5
4	26,5	12,3	27
5	29,5	13,8	30,3

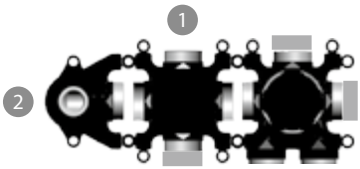MODULE 2 CONTROL 2-WAY TRIMSET WITH BATH SPOUT			
			
press.	flow-rate L/min.		
bar	Exit 1	Exit 2 for Spout	Exit 1+2
0,5	9,2	8,5	10
1	13	12,5	14,1
2	18,7	18	20
3	23	22,3	24,6
4	26,5	26	28,6
5	29,5	29	32


MODULE 2 CONTROL 3-WAY TRIMSET WITH HANDSHOWER

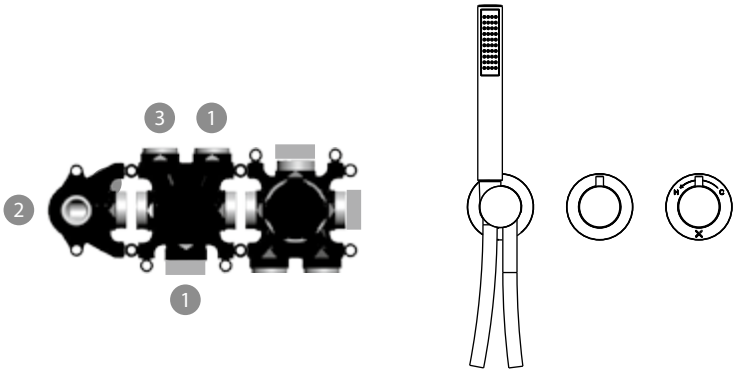










press.	flow-rate L/min.		
bar	Exit 2 Hand Shower	Exit 1	Exit 3
0,5	4,1	10	9,7
1	6	13,7	13,4
2	8,5	19,5	19
3	10,6	23,8	23,3
4	12,3	27,5	26,8
5	13,8	30,5	29,8

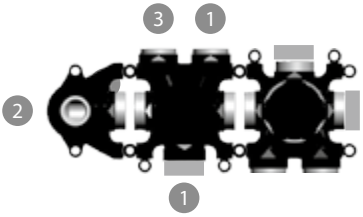MODULE 2 CONTROL 3-WAY TRIMSET WITH BATH SPOUT			
			
press.	flow-rate L/min.		
bar	Exit 2 Bath Spout	Exit 1	Exit 3
0,5	8,5	10	9,7
1	12,5	13,7	13,4
2	18	19,5	19
3	22,3	23,8	23,3
4	26	27,5	26,8
5	28,8	30,5	29,8

MODULE 2 CONTROL 2-WAY TRIMSET WITH BATH SPOUT & HANDSHOWER

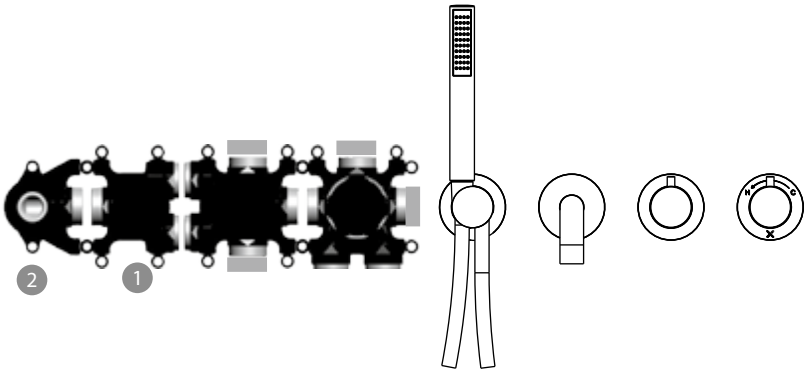



press.	flow-rate L/min.		
bar	Exit 1 Bath Spout	Exit 2 Hand shower	Exit 1 +2
0,5	8	4,1	8,8
1	11,7	6	12,7
2	17	8,5	18,3
3	21	10,6	22,5
4	24	12,3	25,6
5	26,7	13,8	28,5

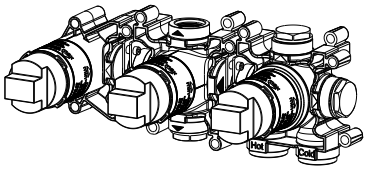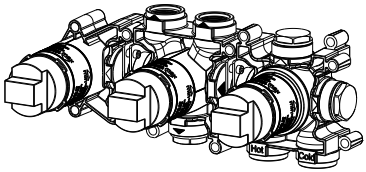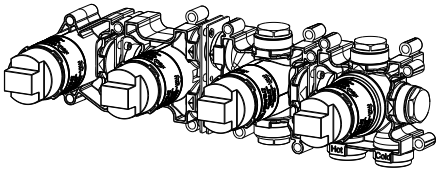






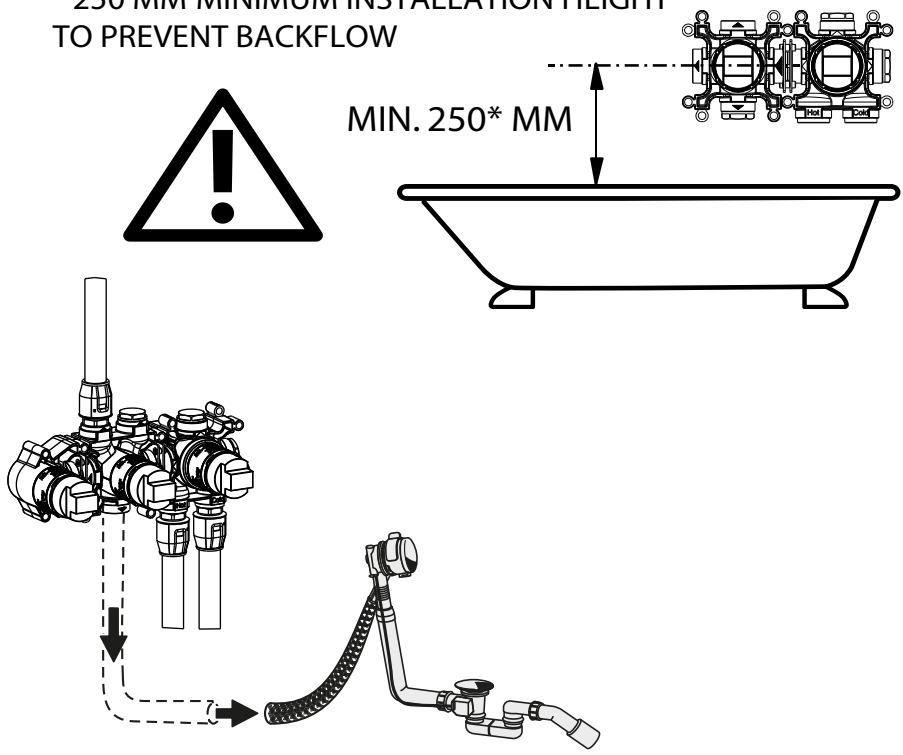

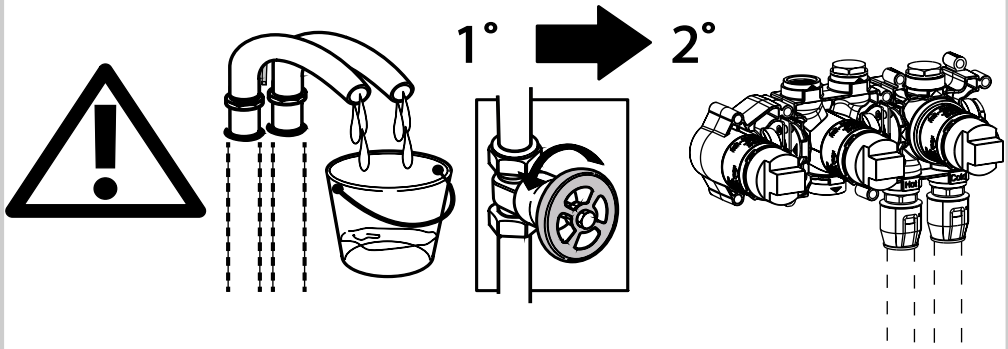

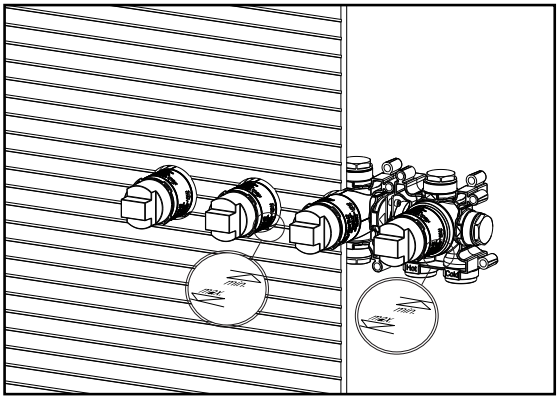
GB Mounting Istructions

* 250 MM MINIMUM INSTALLATION HEIGHT
TO PREVENT BACKFLOW









MOUNTING ON PLASTERBOARD WALL


16

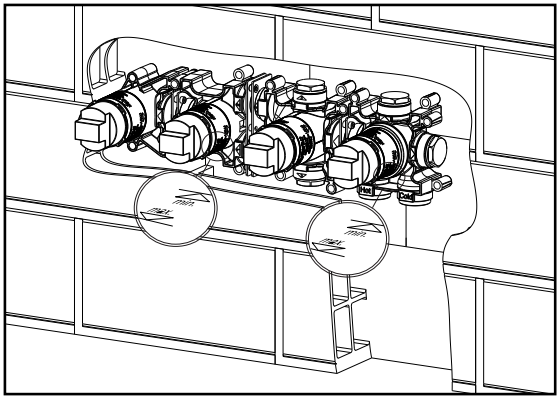


SOLID WALL MOUNTING


17

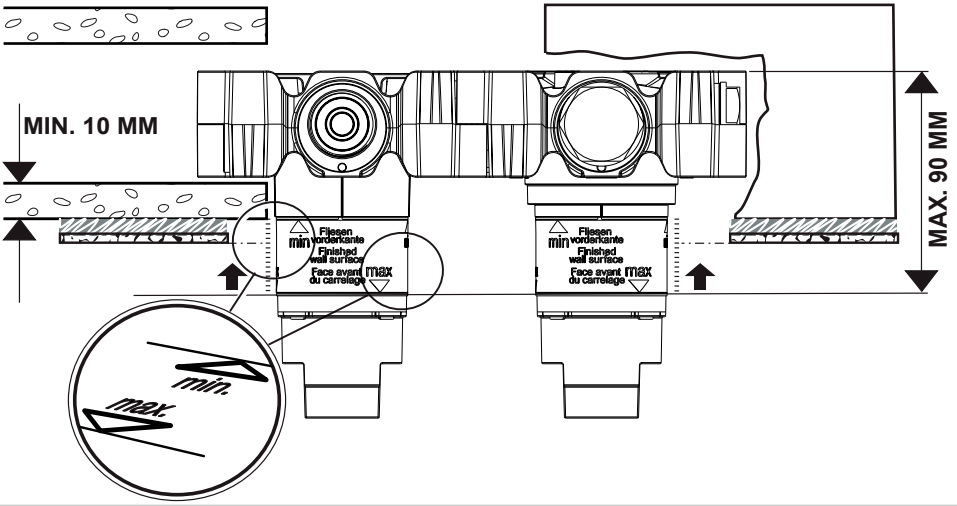

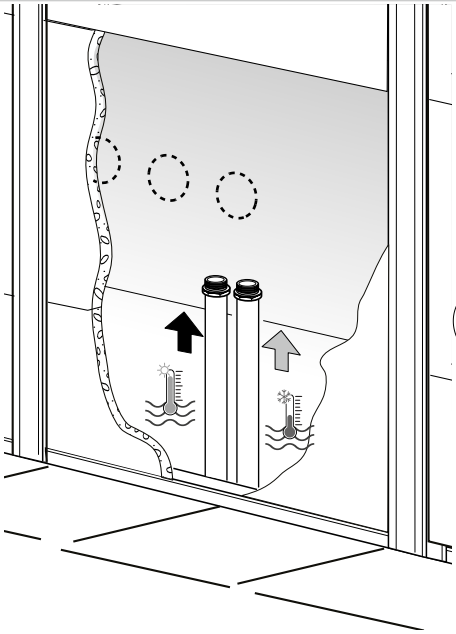


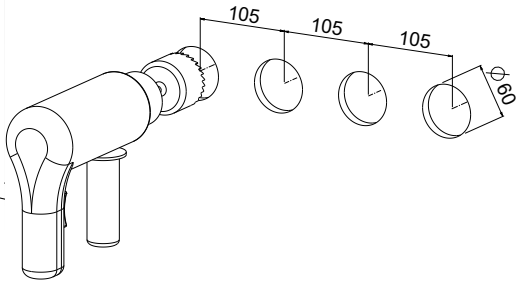




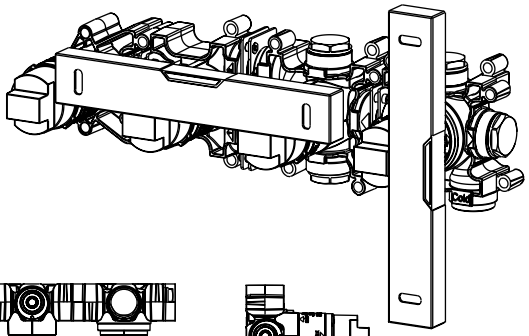



OK





NOT OK




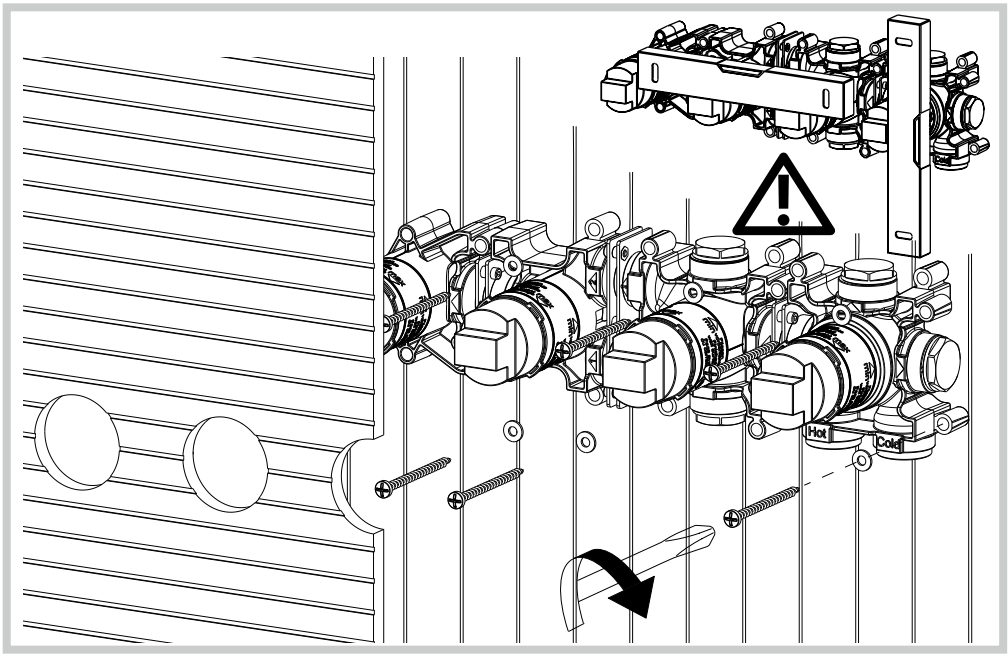
Hot
Cold

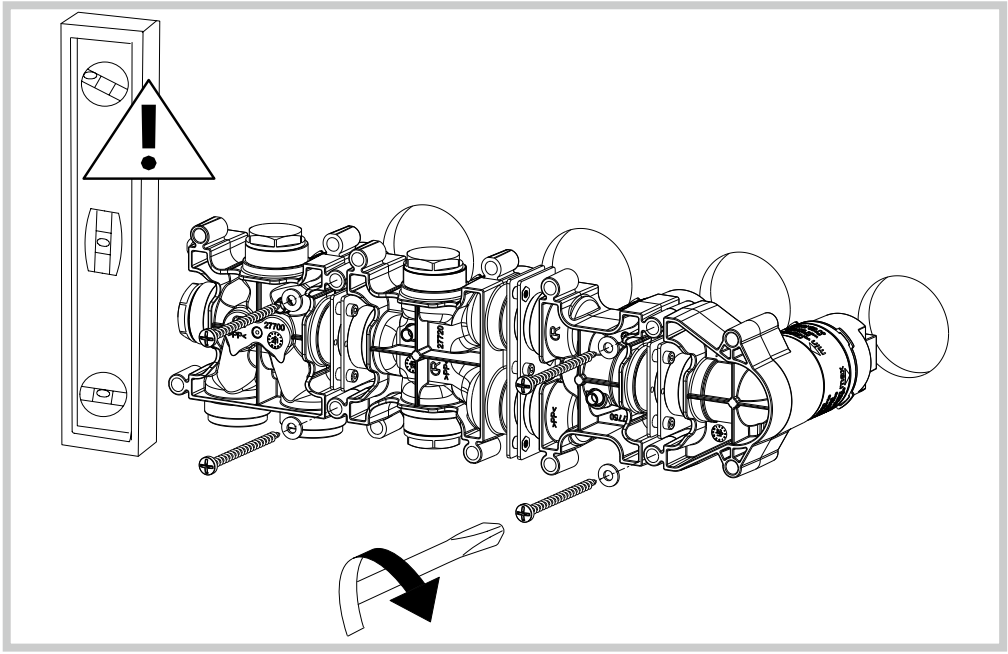


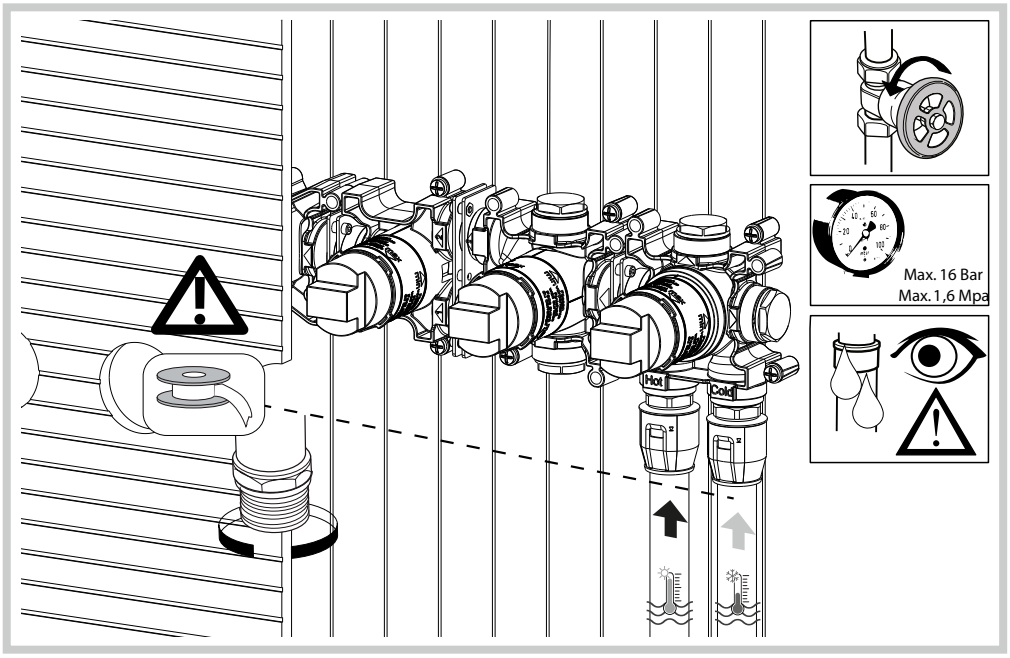

Hot
Cold
Max. 16 Bar
Max. 1,6 Mpa

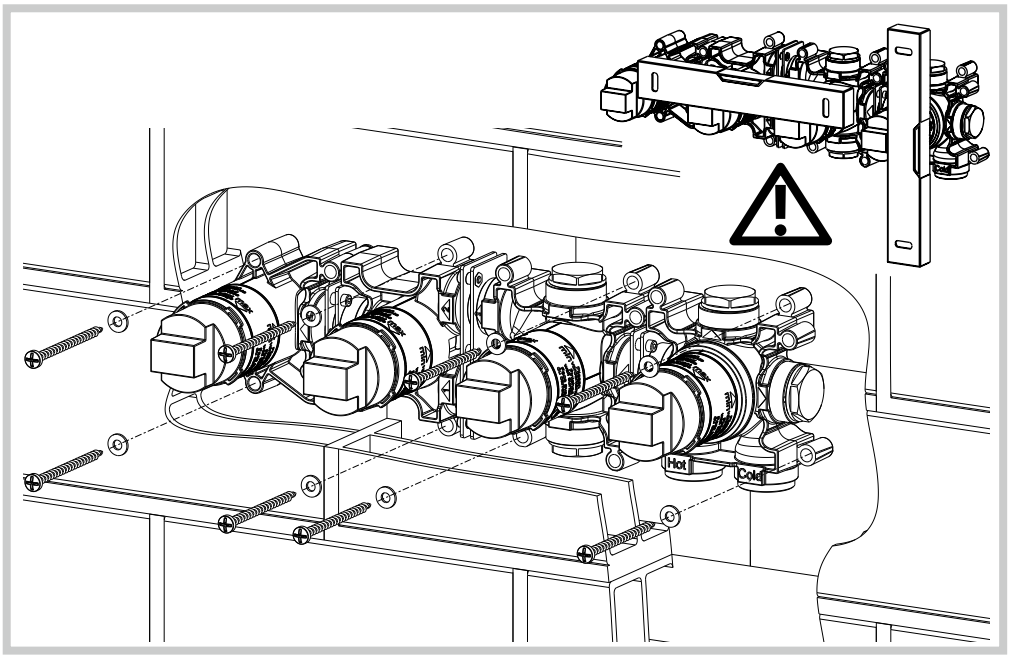

Hot
Cold

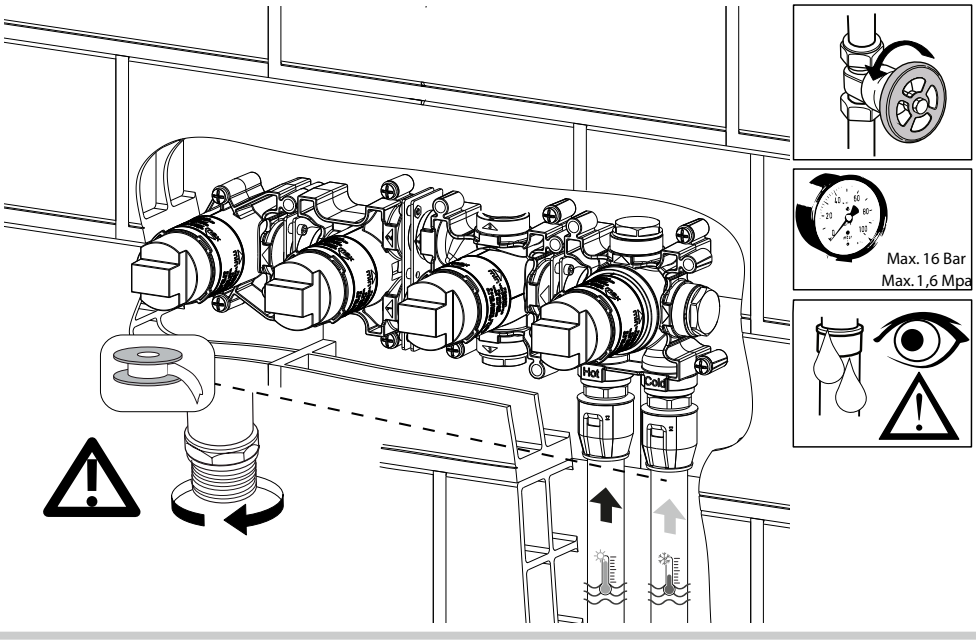

UPWARD EXIT

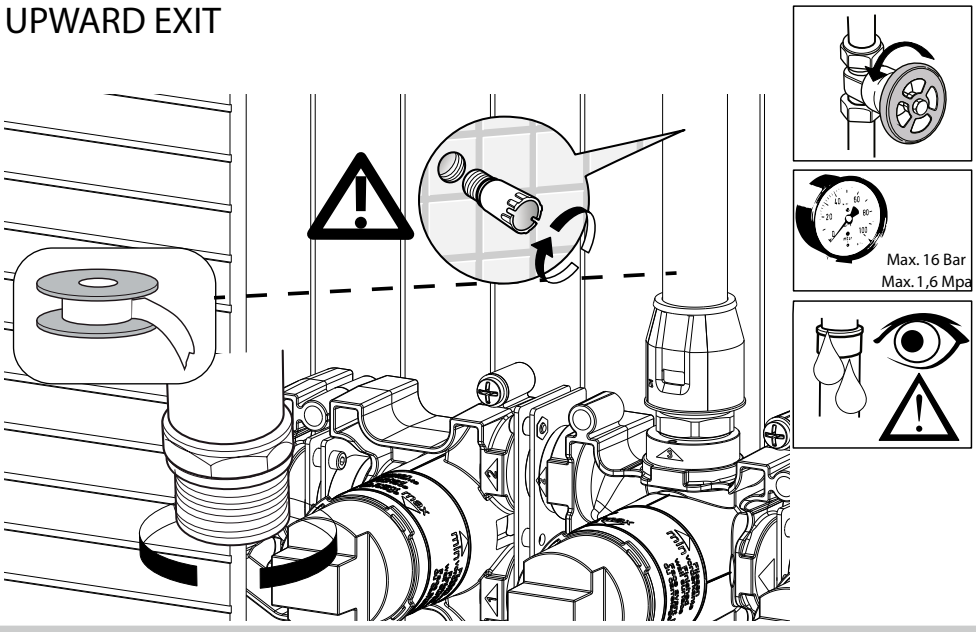


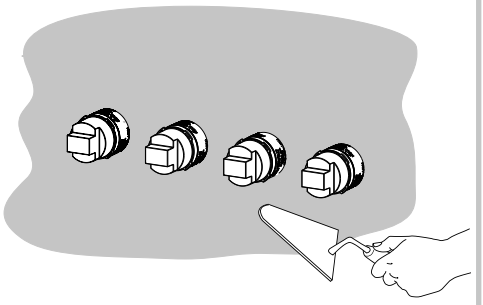


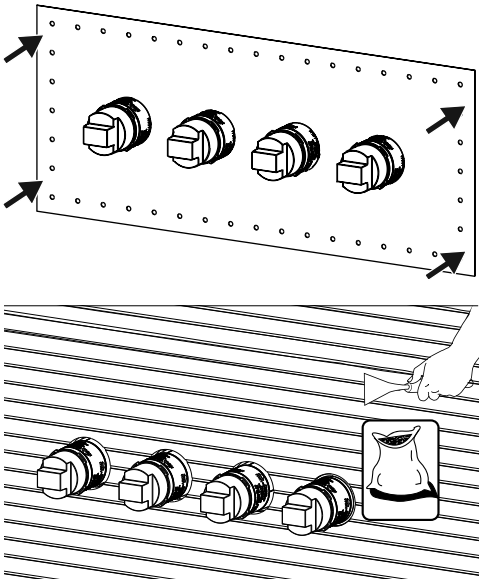



TILE COATING: ROUND HOLES


ØMIN 54 MM
ØMAX 60 MM

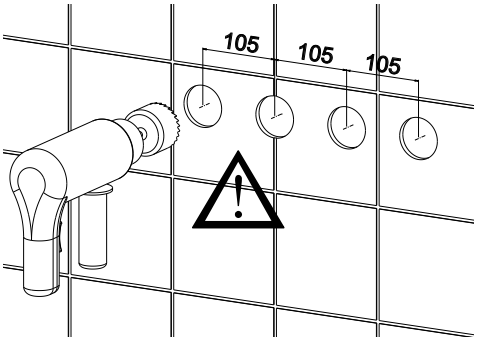


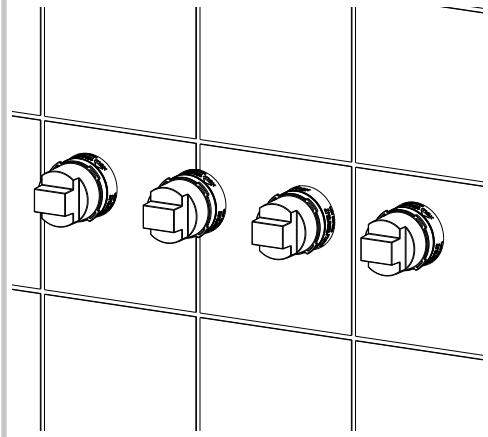

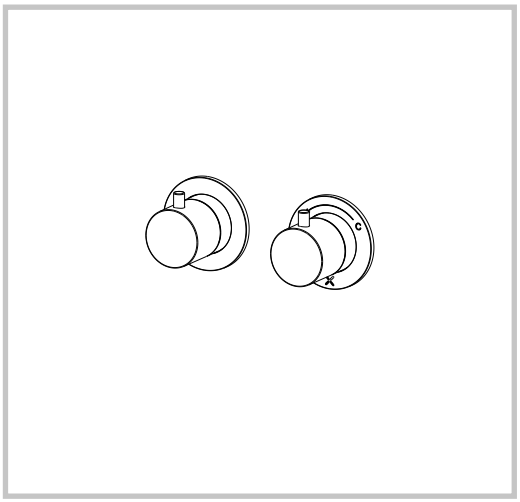

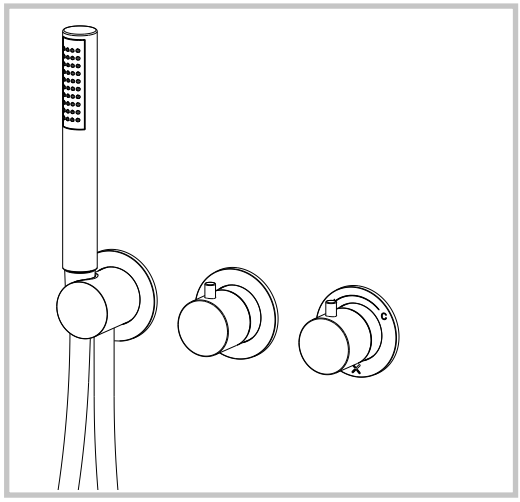

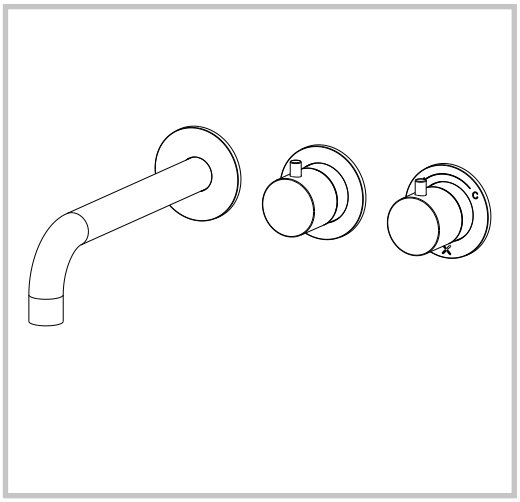

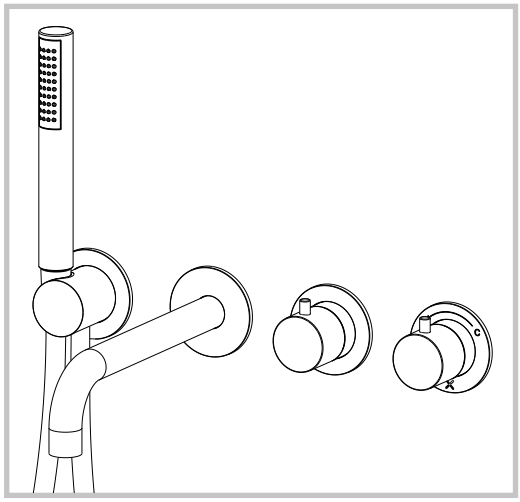

PROMODDIVLBP/PROMOD1601/PROMOD1701/PROMOD440TRIM

MOUNTING INSTRUCTIONS

1 TECHNICAL FEATURES

PRESSURE RANGE MIN/MAX 0,5/5 BAR
(IN CASE OF WATER PRESSURE HIGHTER THAN 5 BAR WE RACOMMEND INSTALLING PRESSURE REDUCERS).
RECOMMENDED PRESSURE 3 BAR.

OPERATION:
EITHER WITH GAS OR ELECTRIC ACCUMULATION BOILERS.
CENTRALISED SYSTEMS.

The product should only be installed by a suitably qualified plumber/ installer.




SAFETY LOCK AT:	41° C
MIN. WORKING TEMPERATURE:	3° C
MIN. RECOMMENDED:	15° C
MAX. WORKING TEMPERATURE:	70° C
MAX. RECOMMENDED:	65° C
RECOMMENDED THERMAL DIFFERENTIAL	50° C

THERMAL DISINFECTION IS ALLOWED.




SAFETY SYSTEM WITH FLOW STOP IN CASE OF LACK OF ONE OF THE TWO WATERS.

WARNING: CONTACT THE PLUMBER FOR THE CHOICE OF THE BEST WATER HEATING DEVICE.

2 TECHNICAL INFORMATION


MODULE 2 CONTROL DIVERTER 2-WAY			
			
press.	flow-rate L/min.		
bar	Exit 1	Exit 2	Exit 1+2
0,5	9,2	9,2	9,7
1	13	13	13,7
2	18,7	18,7	19,7
3	23	23	24,2
4	26,5	26,5	28
5	29,5	29,5	31,4

3 TECHNICAL INFORMATION


MODULE 2 CONTROL DIVERTER 3-WAY			
			
press.	flow-rate L/min.		
bar	Exit 2	Exit 1	Exit 3
0,5	10	10	9,7
1	13,6	13,7	13,4
2	19,2	19,5	19
3	23,4	23,8	23,3
4	27	27,5	26,8
5	30	30,5	29,8

4 TECHNICAL INFORMATION


MODULE 2 CONTROL 2-WAY TRIMSET WITH HANDSHOWER

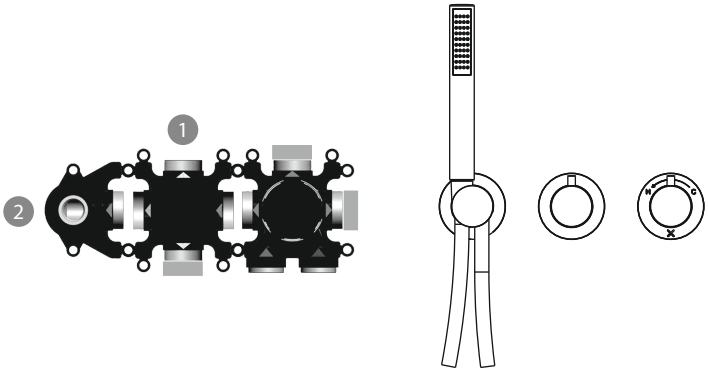

press.	flow-rate L/min.		
bar	Exit 1	Exit 2 for Shower	Exit 1+2
0,5	9,2	4,2	9,3
1	13	6	13,4
2	18,7	8,5	19
3	23	10,7	23,5
4	26,5	12,3	27
5	29,5	13,8	30,3

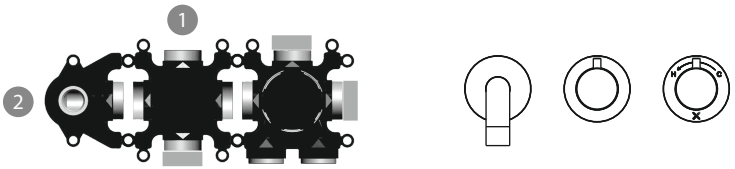MODULE 2 CONTROL 2-WAY TRIMSET WITH BATH SPOUT			
			
press.	flow-rate L/min.		
bar	Exit 1	Exit 2 for Spout	Exit 1+2
0,5	9,2	8,5	10
1	13	12,5	14,1
2	18,7	18	20
3	23	22,3	24,6
4	26,5	26	28,6
5	29,5	29	32


MODULE 2 CONTROL 3-WAY TRIMSET WITH HANDSHOWER

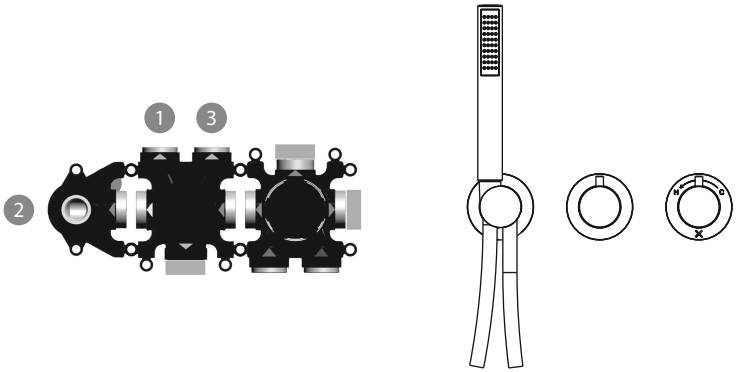

press.	flow-rate L/min.		
bar	Exit 2 Hand Shower	Exit 1	Exit 3
0,5	4,1	10	9,7
1	6	13,7	13,4
2	8,5	19,5	19
3	10,6	23,8	23,3
4	12,3	27,5	26,8
5	13,8	30,5	29,8


7 TECHNICAL INFORMATION

MODULE 2 CONTROL 3-WAY TRIMSET WITH BATH SPOUT

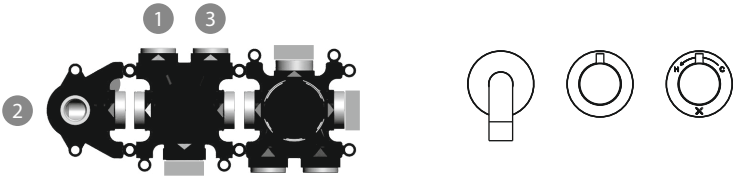

press.	flow-rate L/min.		
bar	Exit 2 Bath Spout	Exit 1	Exit 3
0,5	8,5	10	9,7
1	12,5	13,7	13,4
2	18	19,5	19
3	22,3	23,8	23,3
4	26	27,5	26,8
5	28,8	30,5	29,8


MODULE 2 CONTROL 2-WAY TRIMSET WITH BATH SPOUT & HANDSHOWER

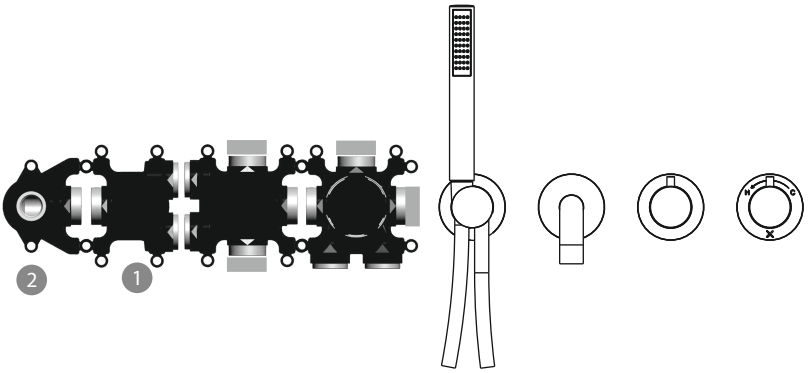


press.	flow-rate L/min.		
bar	Exit 1 Bath Spout	Exit 2 Hand shower	Exit 1 +2
0,5	8	4,1	8,8
1	11,7	6	12,7
2	17	8,5	18,3
3	21	10,6	22,5
4	24	12,3	25,6
5	26,7	13,8	28,5

9 PACKAGE CONTENT

MODULE 2 CONTROL DIVERTER TRIMSET

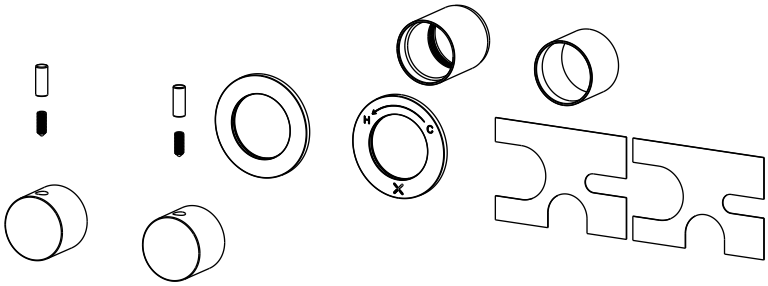


GB MOUNTING ISTRUCTIONS



10 PACKAGE CONTENT


MODULE 2 CONTROL TRIMSET WITH HANDSHOWER

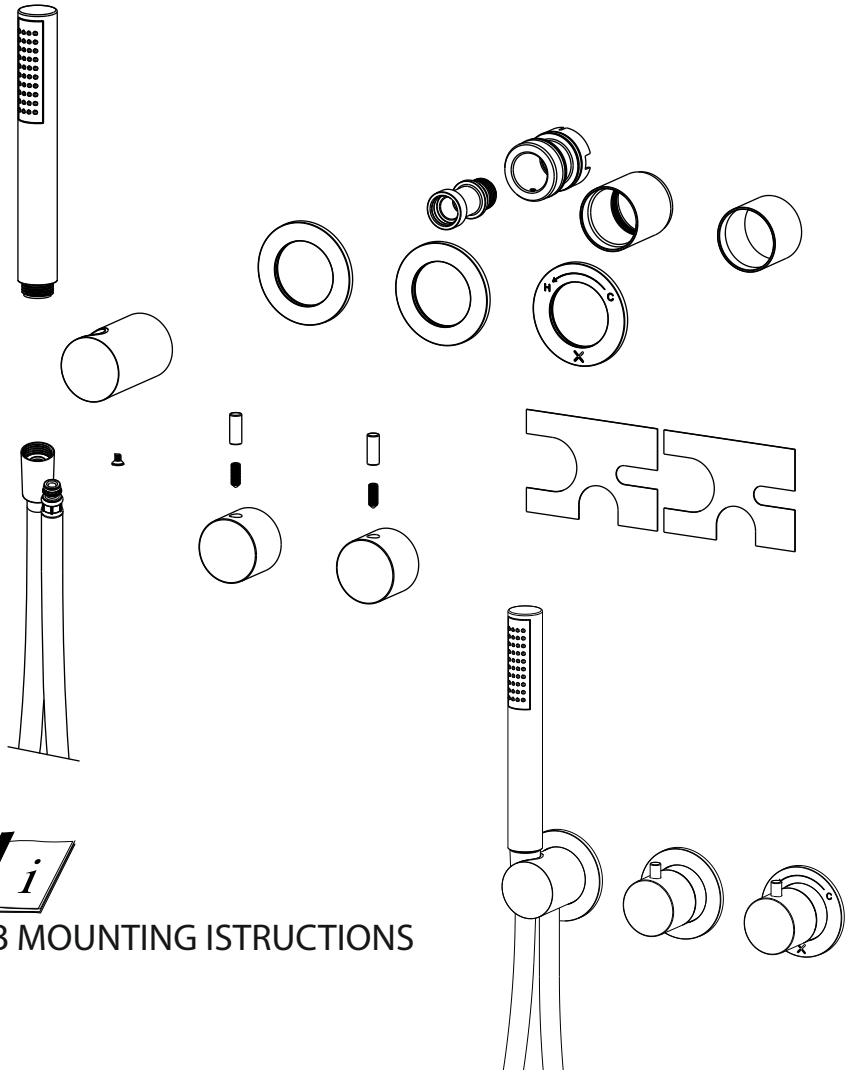


GB MOUNTING ISTRUCTIONS

11 PACKAGE CONTENT


MODULE 2 CONTROL TRIMSET WITH BATH SPOUT

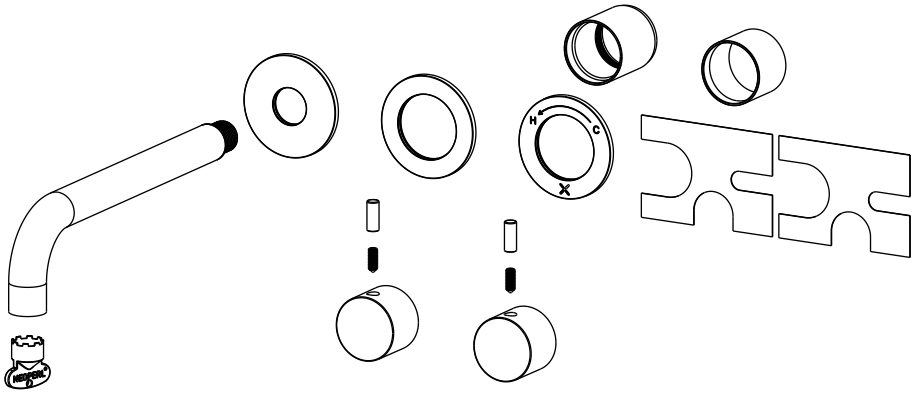


GB MOUNTING ISTRUCTIONS

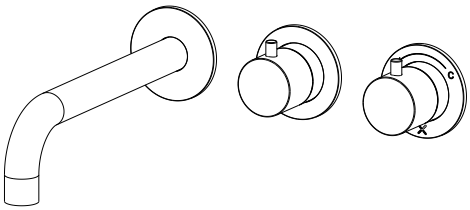



MODULE 2 CONTROL TRIMSET WITH BATH SPOUT & HANDSHOWER

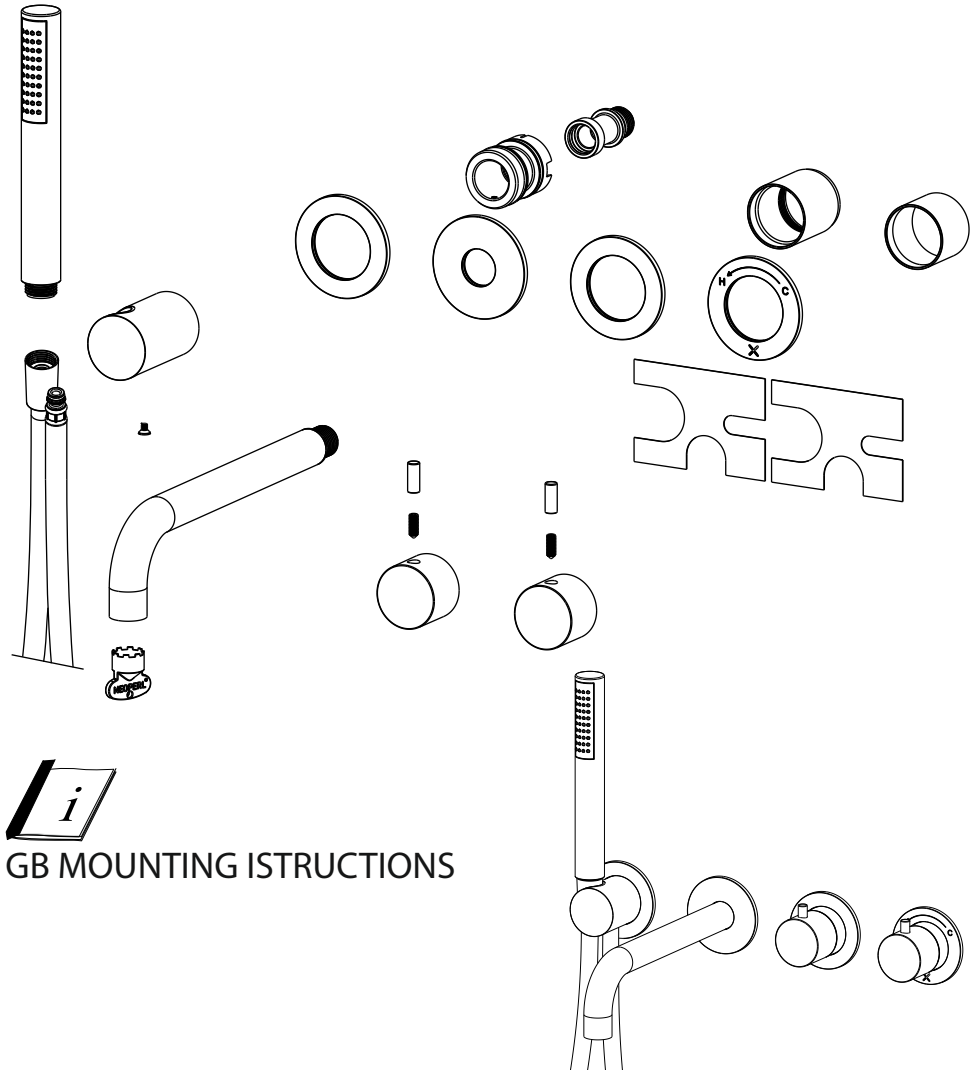



GB MOUNTING ISTRUCTIONS

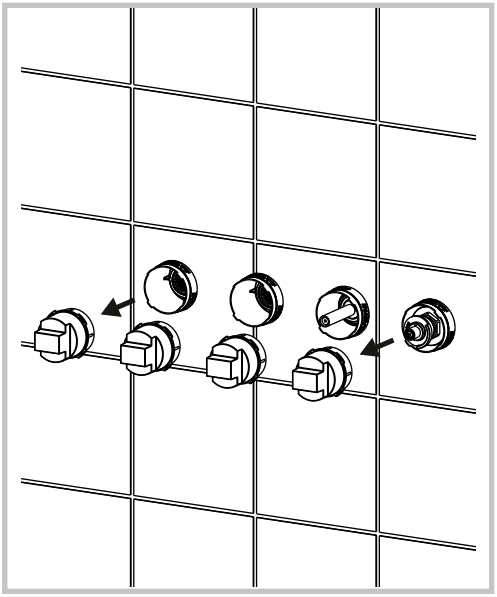


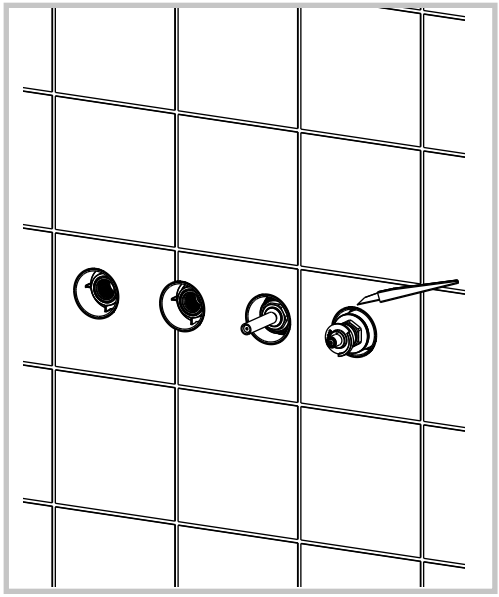

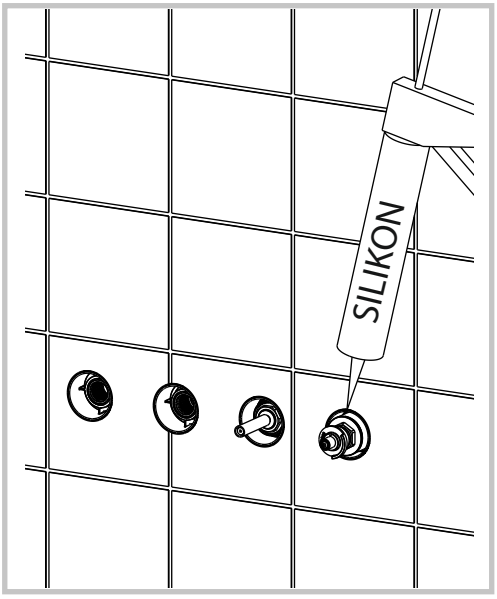

SILIKON

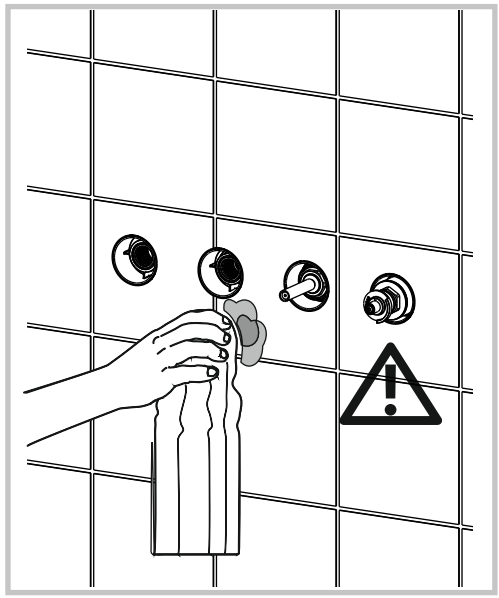

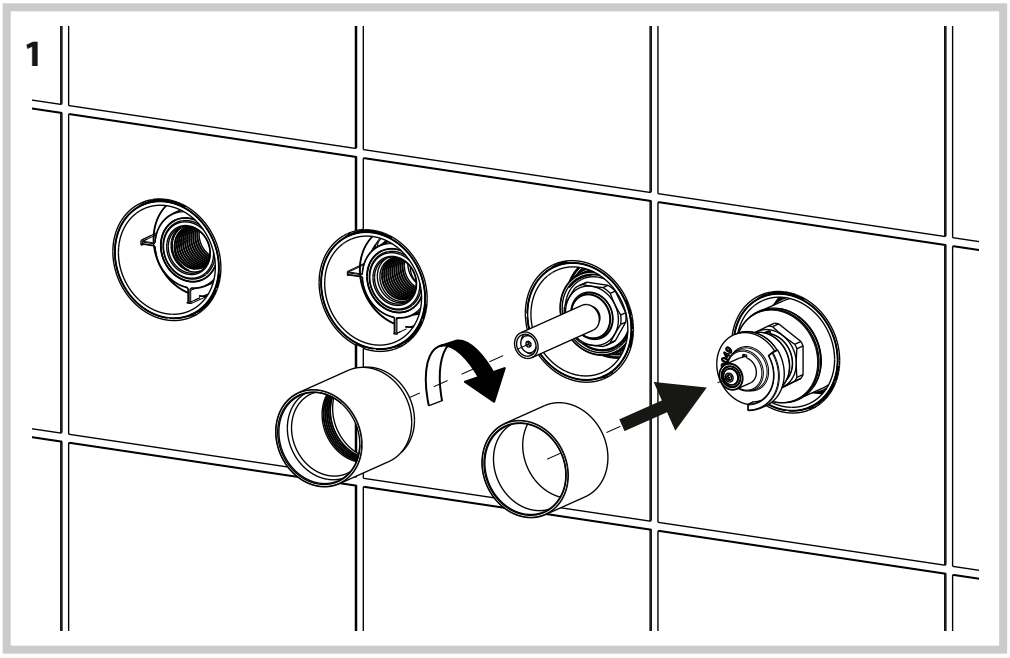

1

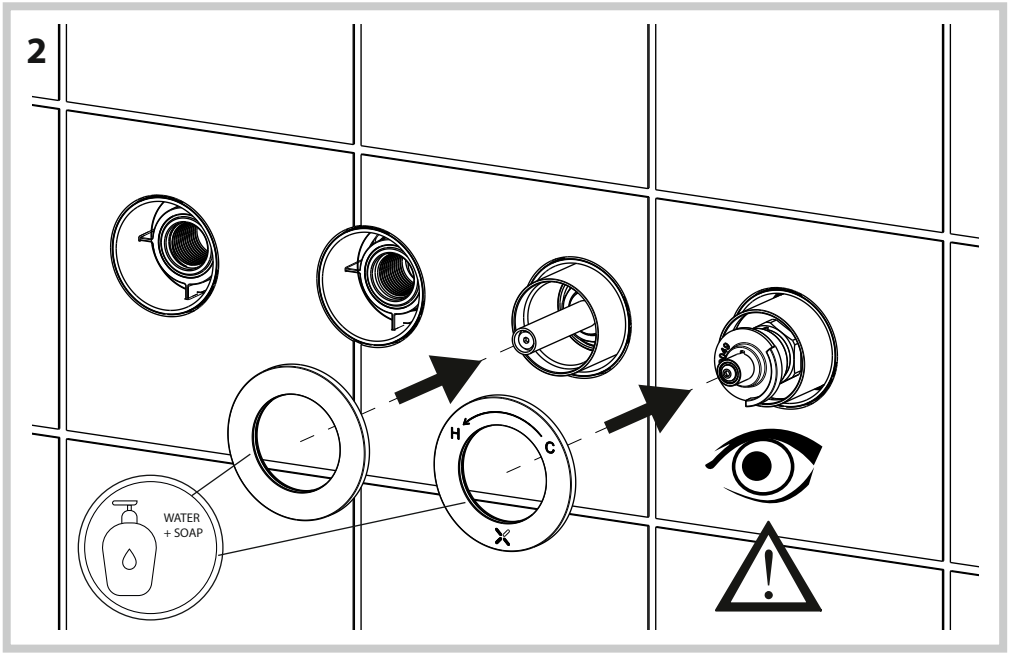
2
H
C
WATER
+ SOAP


3

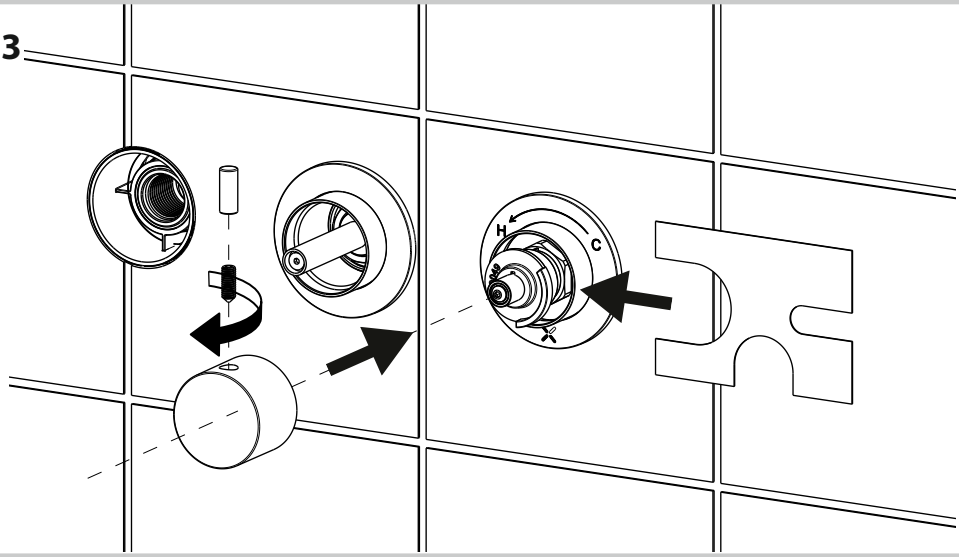


4

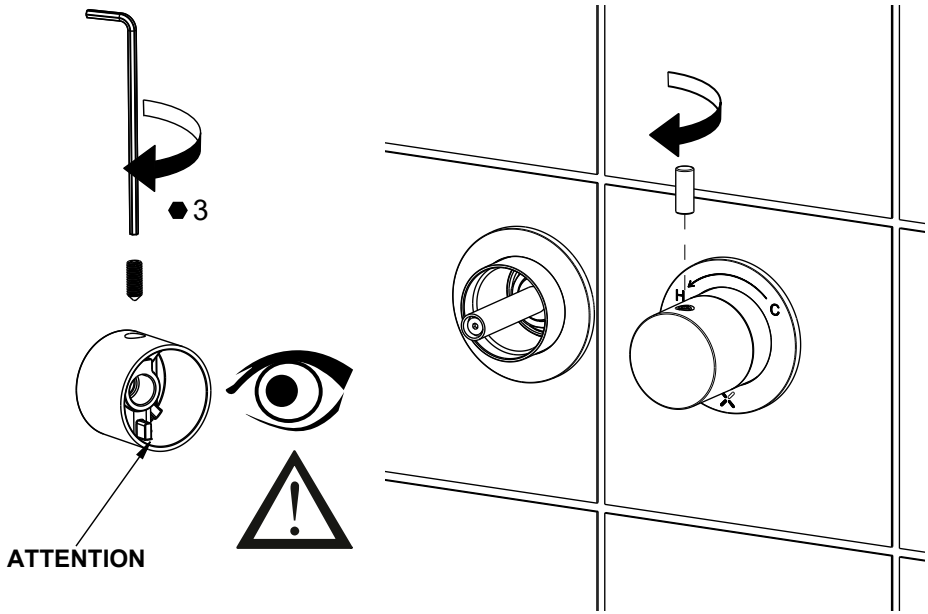


5

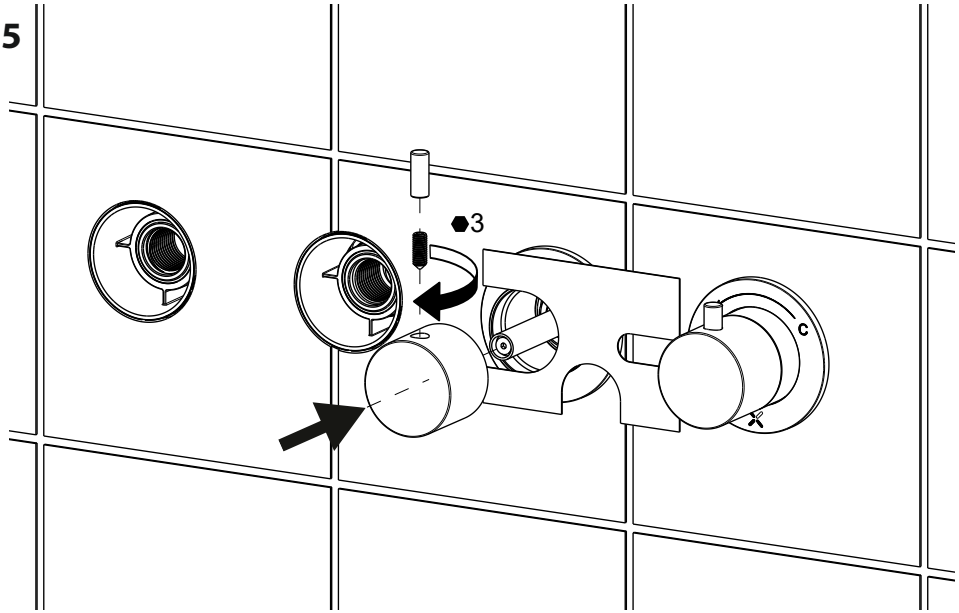

6

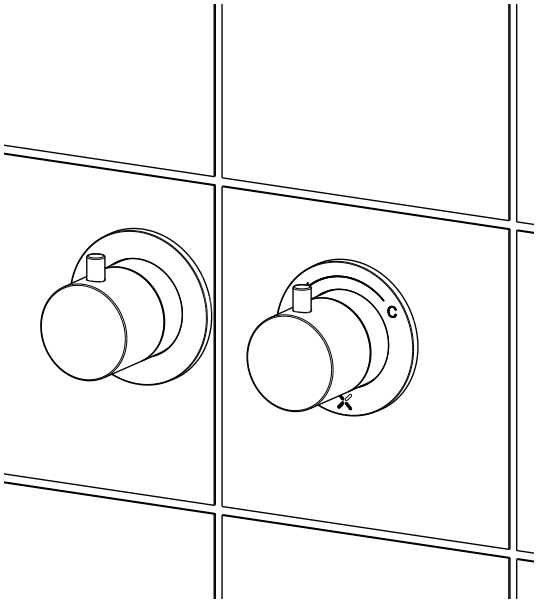


OK




7


ATTENTION: CHECK THE CLEANING OF THE INDICATED AREAS
BEFORE PROCEEDING WITH THE INSTALLATION OF THE AESTHETIC PARTS, DRAIN A GOOD QUANTITY OF WATER TO CLEAN THE SYSTEM FROM DIRT AND RESIDUES.

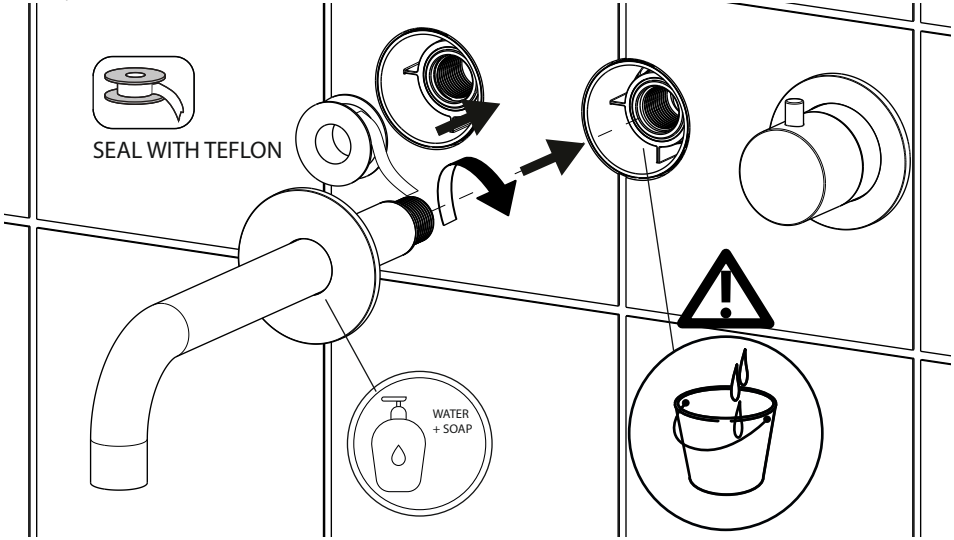


8

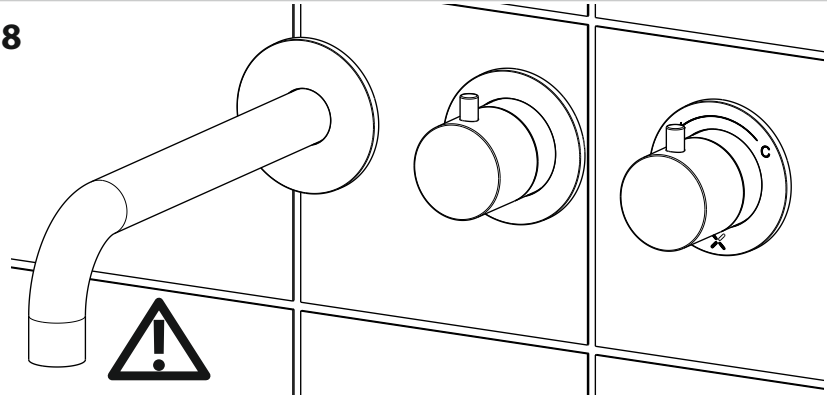

OK

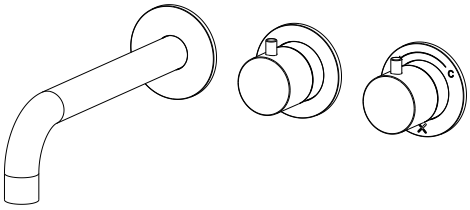


9

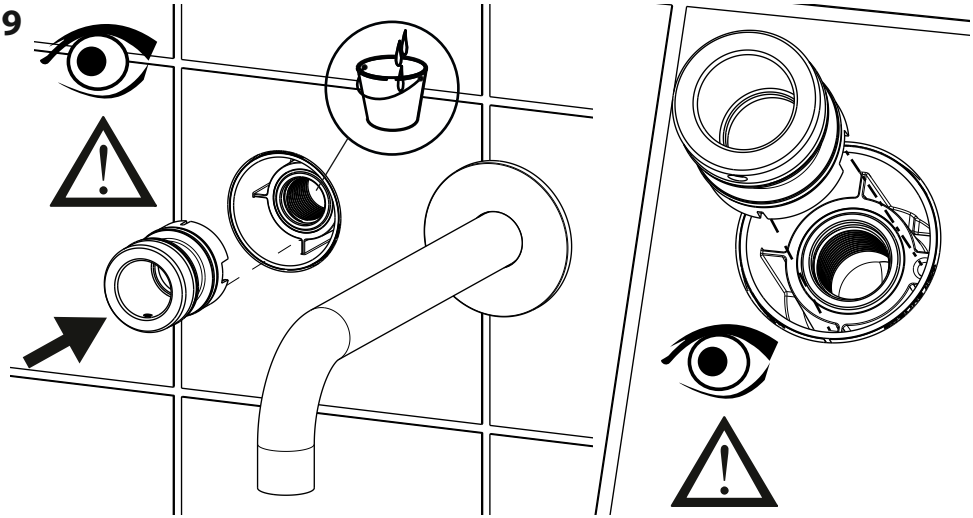


ATTENTION: CHECK THE CLEANING OF THE INDICATED AREAS
BEFORE PROCEEDING WITH THE INSTALLATION OF THE AESTHETIC PARTS,
DRAIN A GOOD QUANTITY OF WATER TO CLEAN THE SYSTEM FROM DIRT AND RESIDUES.


10

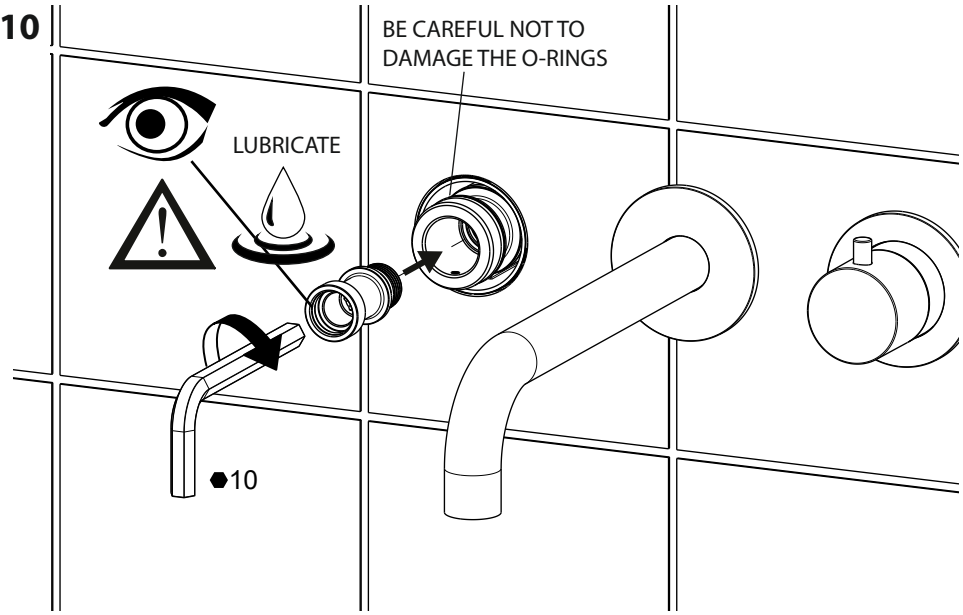


11

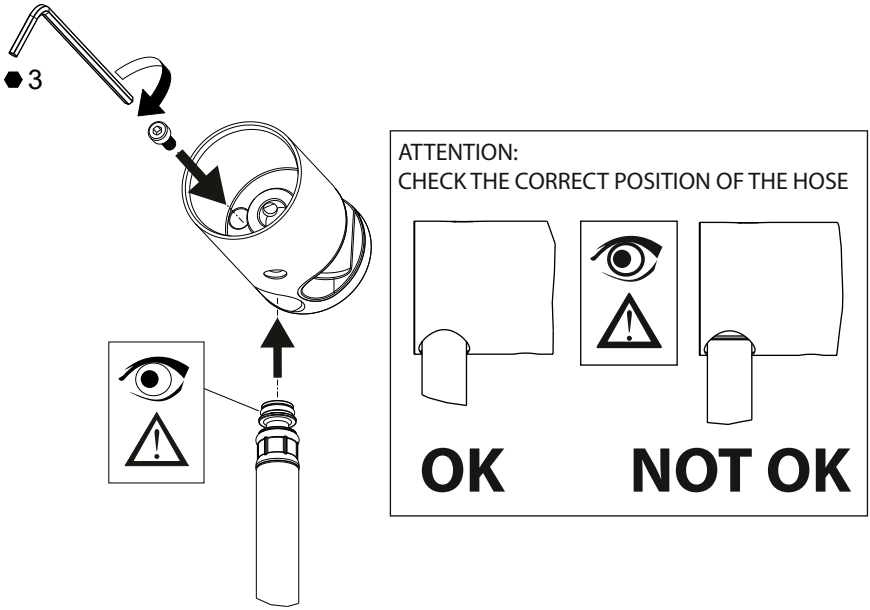
3
ATTENTION:
CHECK THE CORRECT POSITION OF THE HOSE
OK
NOT OK


12

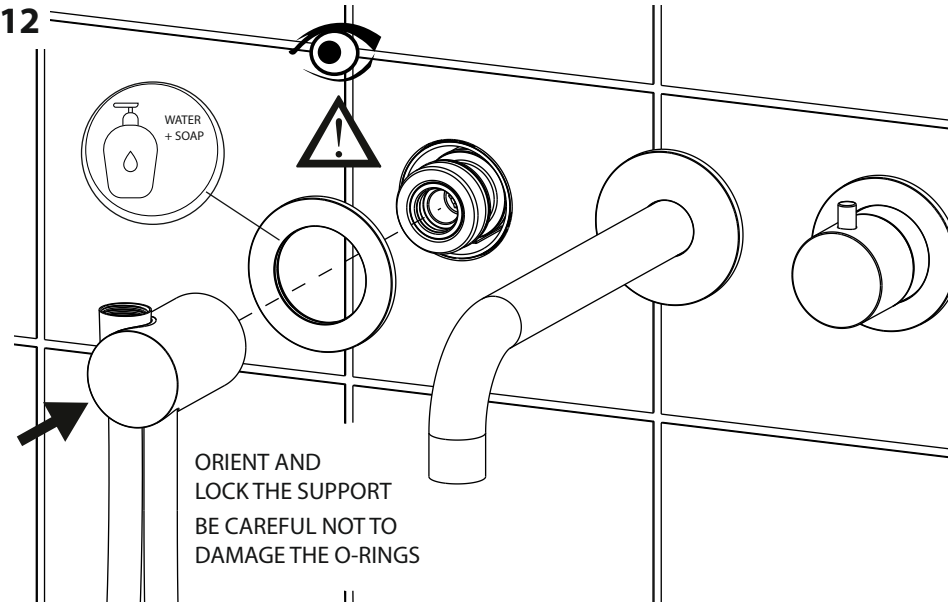
WATER
+ SOAP
ORIENT AND
LOCK THE SUPPORT
BE CAREFUL NOT TO
DAMAGE THE O-RINGS


13

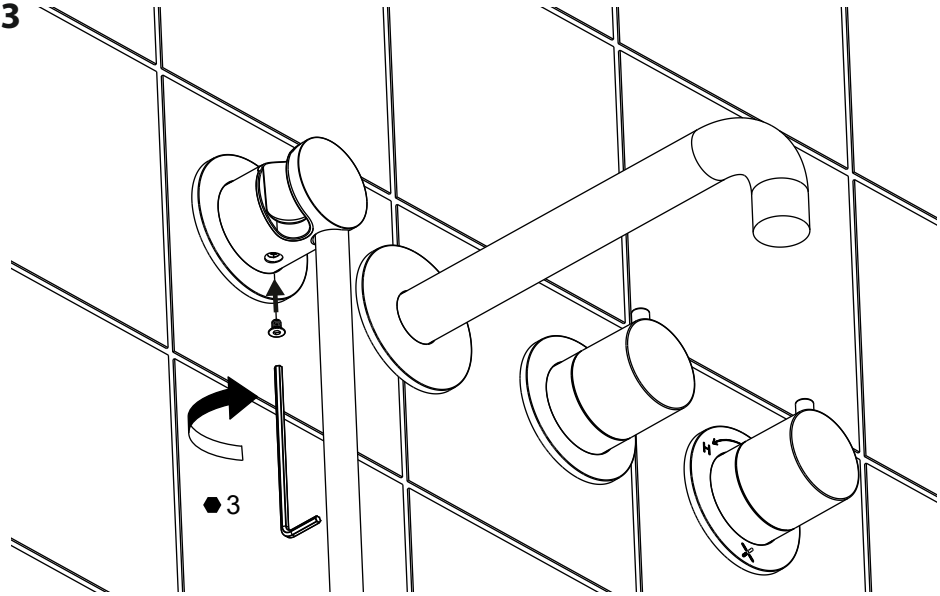


14

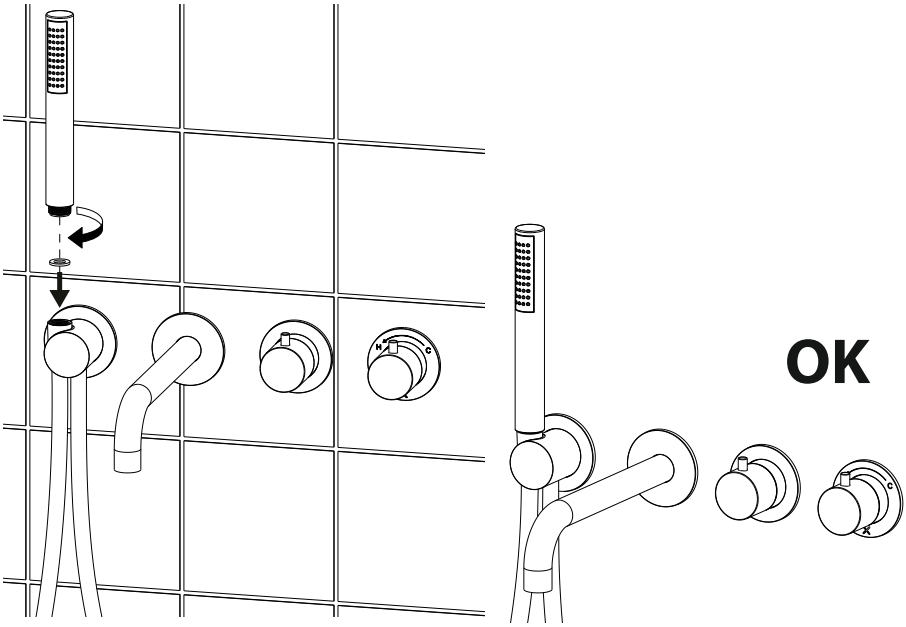


1

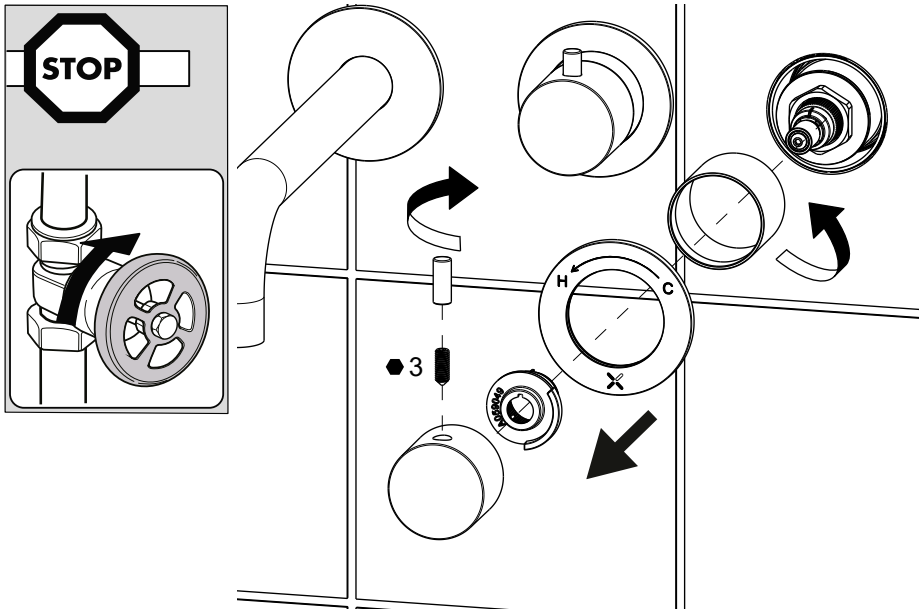


2

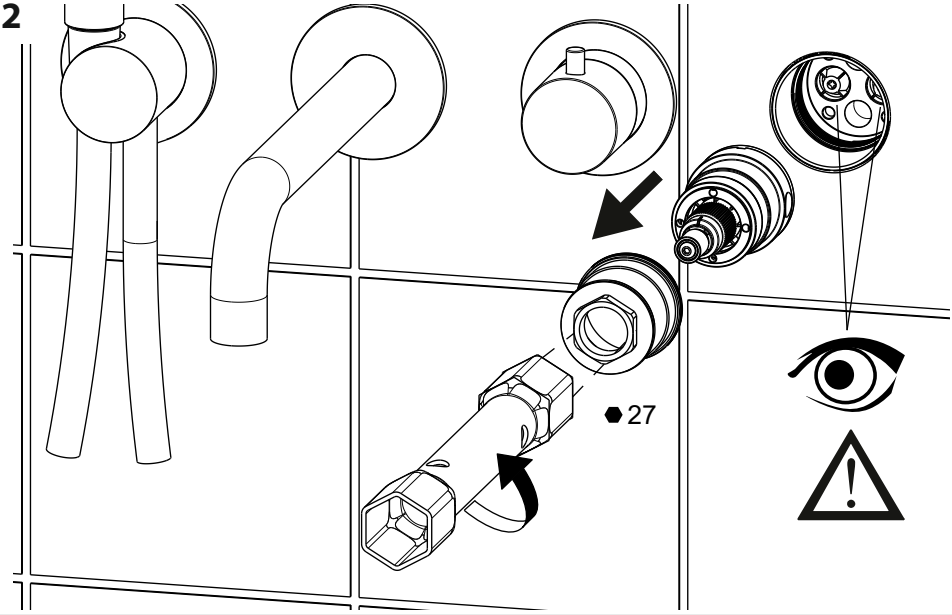


3

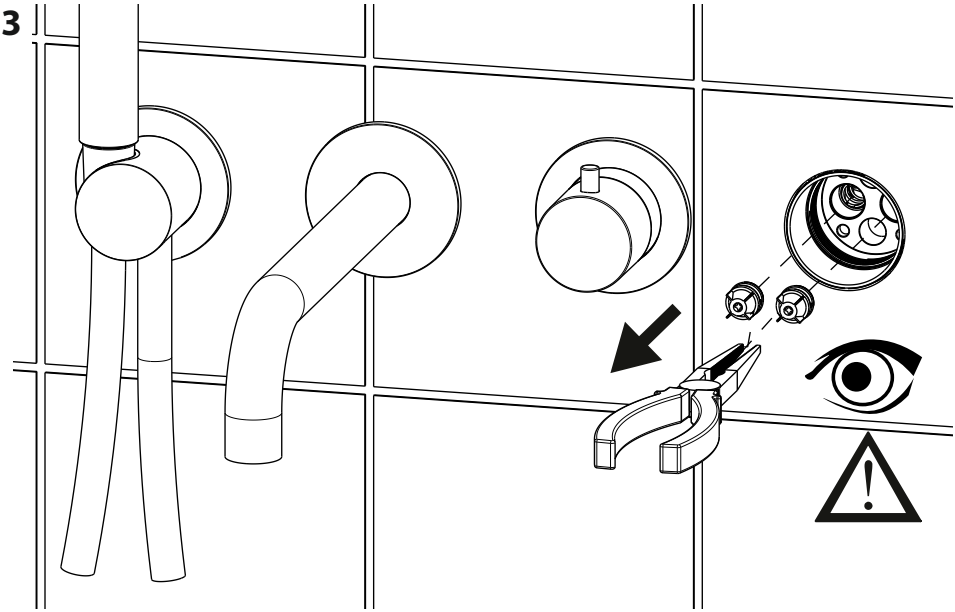


4

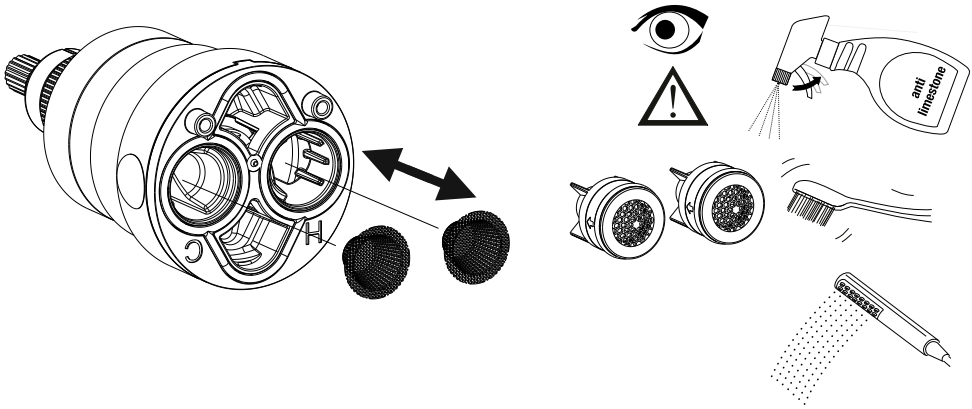


5

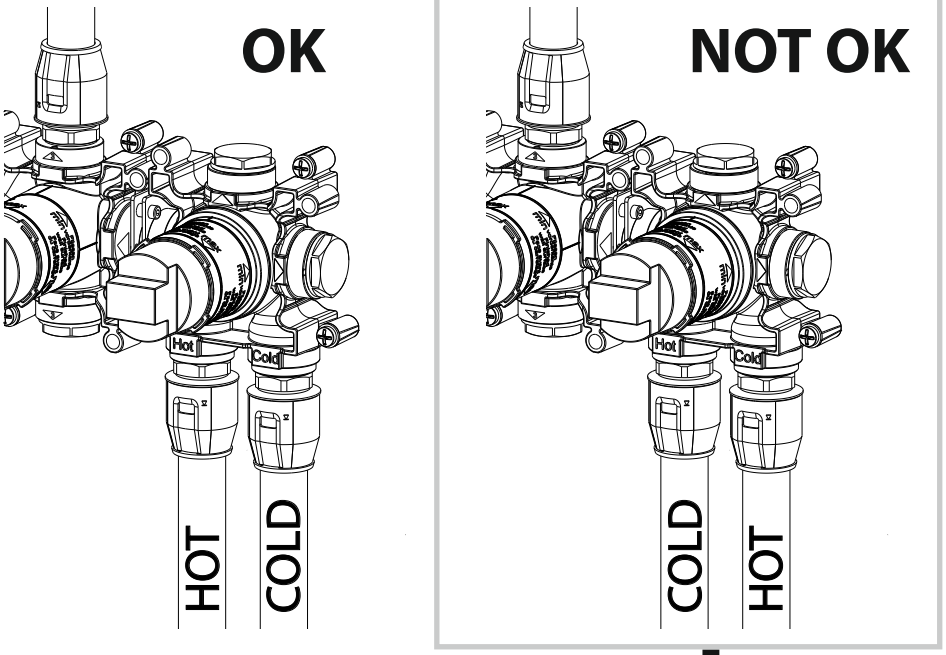


6

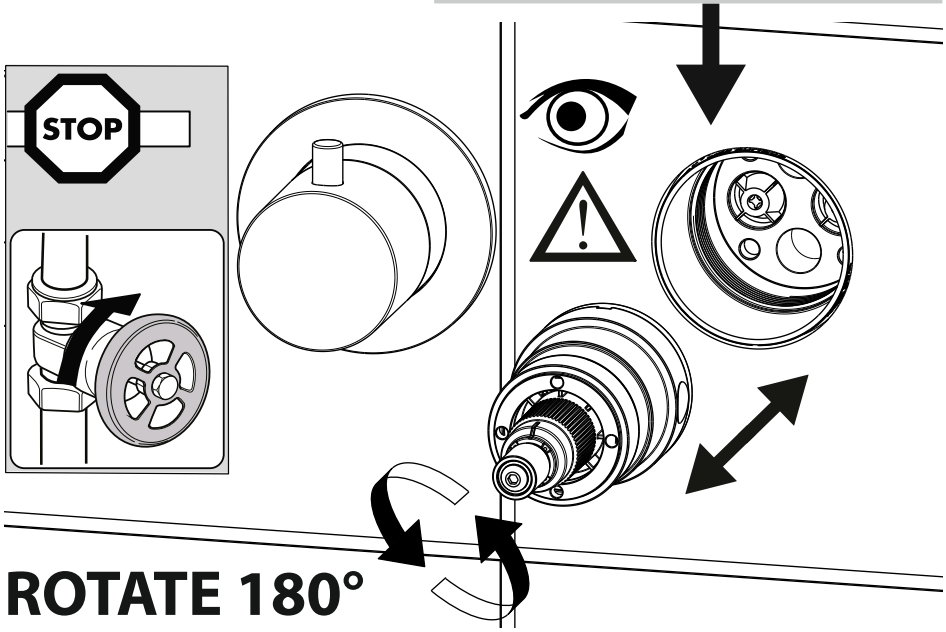


7

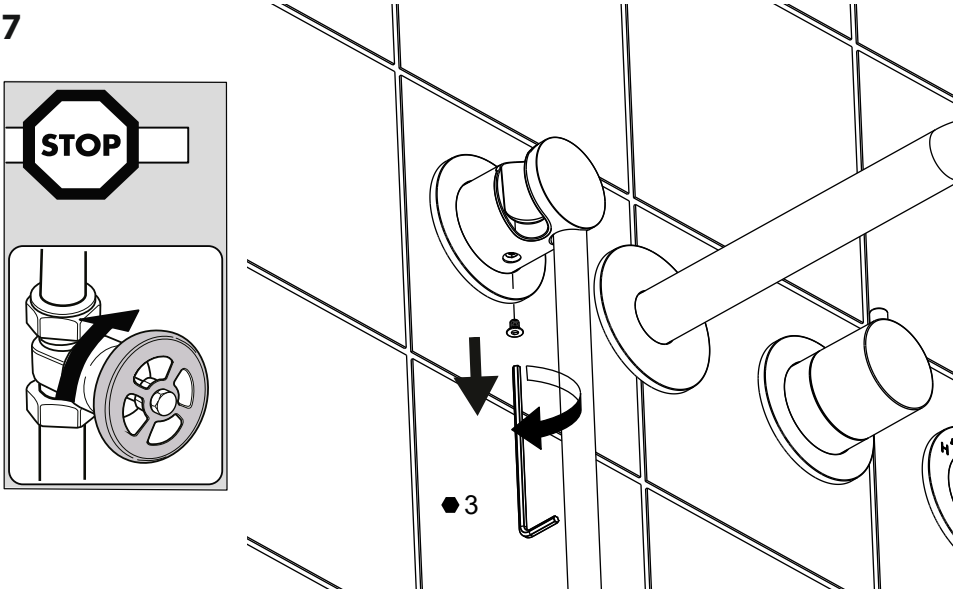

8

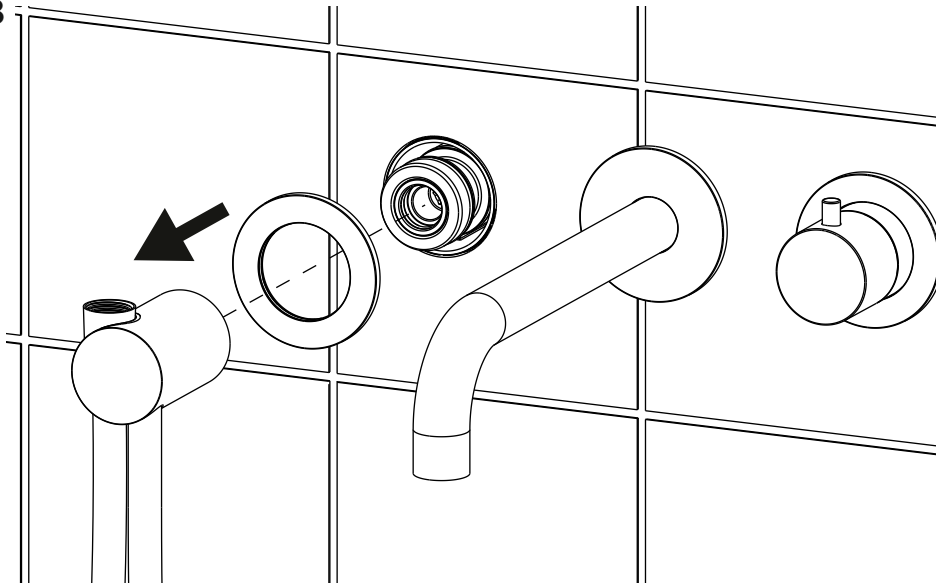

9

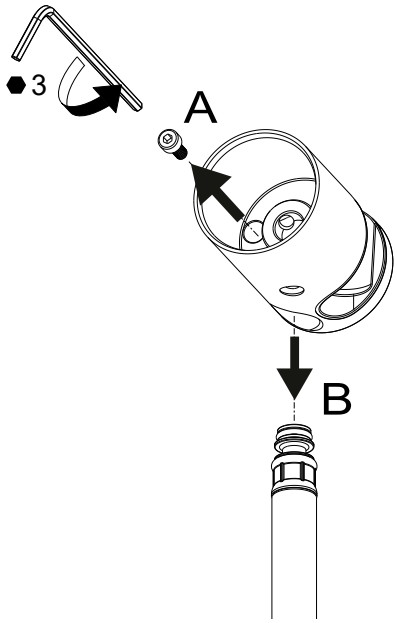

REPLACE THE FLEX HOSE AND START FROM POINT 11