

# SPECIFICATION SHEET

**COLLECTION:** ALTITUDE

**PRODUCT CODE:** TAB-128/3WO-ALT-CP



## DESCRIPTION:

Tablet iO Altitude with integrated single function round mini kit, 3 outlet 3 handle horizontal concealed thermostatic shower valve with all-flow function - 1.0 bar MOP to operate thermostatic cartridge C-704-34S diverter cartridge FL-802-33/2MX flow cartridge TAB-002A-3/4 2 x 3/4" female inlets 2 x 3/4" female outlets, 1 x 1/2" male outlet includes 3/4" - 1/2" adaptors supplied with mortar/tile guard min-max wall mount 75-100mm optimum installation depth 87mm minimum operating pressure 0.2 bar LP (shower) 1.0 bar MP (bath)

## FINISH:

Chrome

## FLOW REGULATOR:


FR-SHOWER/9-C/P

## MINIMUM OPERATING PRESSURE:

0.2 bar LP (shower) 1.0 bar MP (bath)

## FLOW RATE AT 3.0 BAR FLOW PRESSURE:


outlet 1 30.1 outlet 2 30.1 outlet 3 15.7 l/min

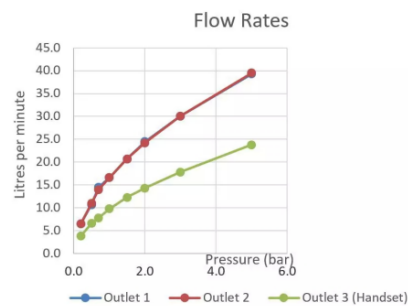

# TECHNICAL DRAWING

**COLLECTION:** ALTITUDE

**PRODUCT CODE:** TAB-128/3WO-ALT-CP


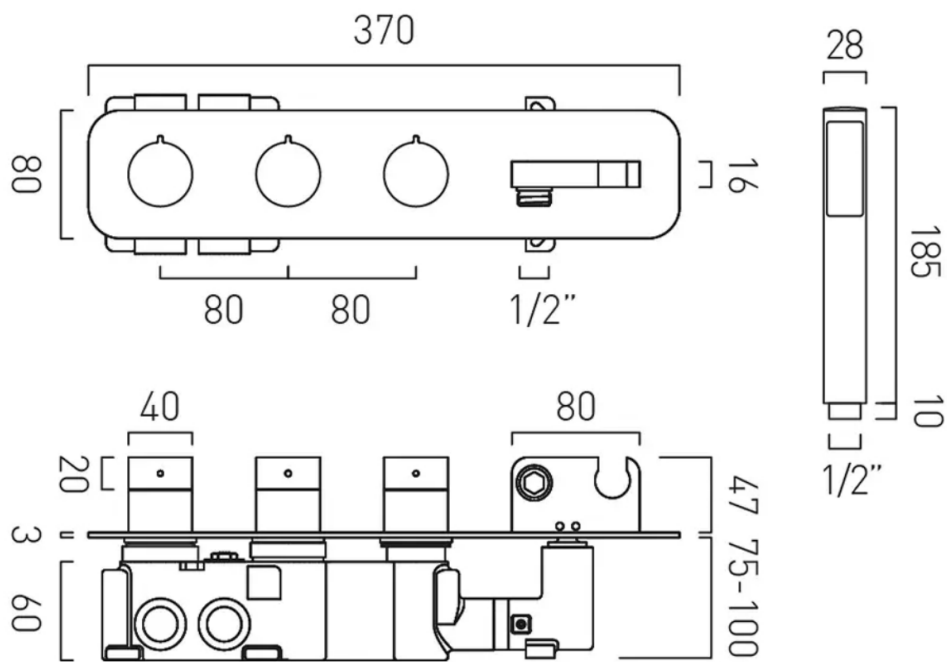


tel: 01934 744466  
email: [sales@vado.com](mailto:sales@vado.com)  
[www.vado.com](http://www.vado.com)

**where inspiration flows**  
taps | showering | accessories





## Operation - flow control

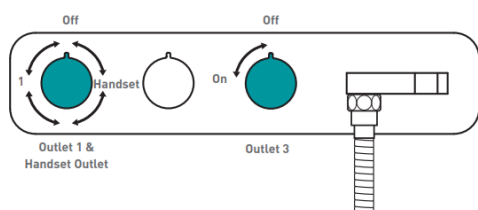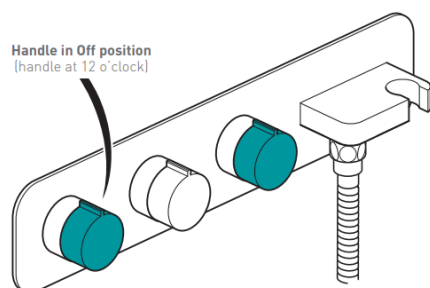

Turning the flow control in the direction of the arrows increases the flow of water to the outlets.

## Operation - temperature control

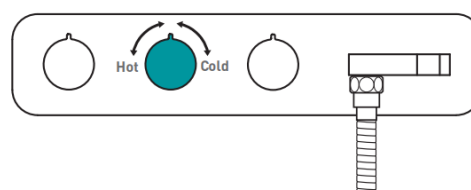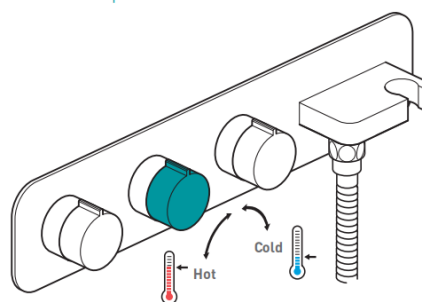

Turning the temperature control handle in the direction of the arrows increases/decreases the temperature