TECHNICAL DATA SHEET

ISO Basin Mono Mixer

Product Code TBTS-34-1202

Construction Brass Body CuZn40Pb2, EN CW617N (equivalent to BS CZ122)

Finishes Chrome plated to BS EN 248

Product Type Contemporary

Water Pressure Min. 0.2 bar, Max. 6.0 bar


Plumbing SystemsSuitable for all plumbing systemsStandardsComplies with BS5412, BS EN200CertificationManufactured to comply with WRASCartridge35mm Coolstart ceramic disc cartridge

Aerator Neoperl Adjustable Slim Air

Fitting M10 x 350mm ½" BSP Female Flexi Tails Packaging 54 x 36 x 19cm / carton (8 boxes / carton)

Guarantee 15 years against manufacturing faults (excluding serviceable parts).



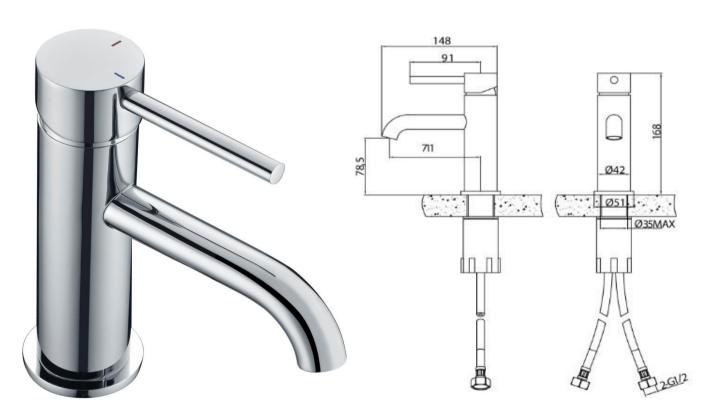

Flow Rates (Litres per minute)

System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
	3.8	6.8	-	9.1	12.3	-	14.7	17.3	-	-

The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice.