


- All the dimensions are shown in millimetres
- Horizontal tube dia 22mm
- Vertical tube dia 38mm
- Bracket length - 50mm
- Made from 304 Polished Stainless Steel
- ½ inch BSP underside tapings
- Test pressure: 10 Bar
- Max working temperature: 8 Bar
- Heat output - in accordance with EN 442

Please Note:

- Please allow minimum of 100mm for valves
- Summer element use will affect pipe centres.
- The flow and return can be reversed

Space	Water Content (L)	Weight (KG)	Pipe Centres +/- 2mm	Fixing Centres (H) +/- 2mm	Fixing Centres (W) +/- 2mm	Height (mm)	Width (mm)
RXPS-0610538	2.1	3.2	500	468	500	610	538
RXPS-1076538	3.8	6.1	500	624	500	1076	538
RXPS-1700538	5.9	9.7	500	1248	500	1700	538

Installation:

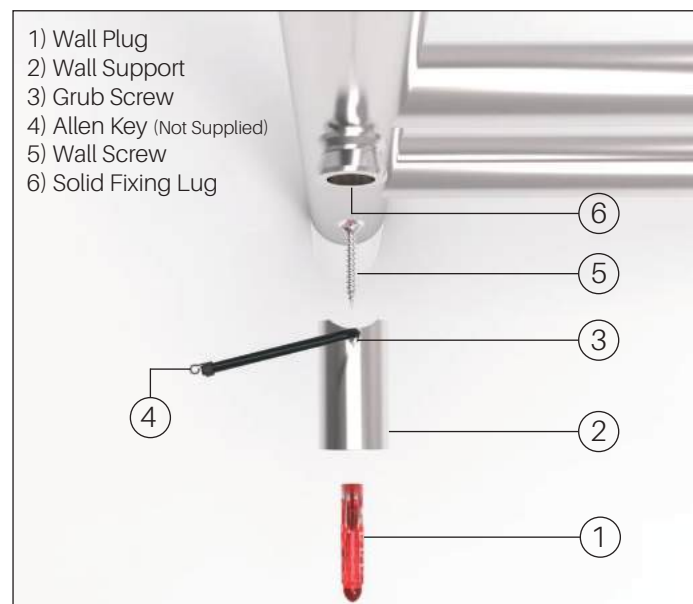

Step 1: Select the desired mounting position, make sure the wall is adequate to take the fixing points of the rail i.e anchor points must be securely attached to a stud or masonry.

Step 2: Loosely screw the wall support (Part 2) into the wall using the wall screw (5) and washer. Use wall plug (1) if you are fixing into masonry. Do not tighten fully.

Step 3: Manoeuvre the rail back onto the bracket and tighten with the grub screw (3).

Cleaning:

- Do not use any abrasive or chemical cleaners to clean the radiators as this will cause damage to the surface finish. Please use warm water and a damp cloth.
- Do not clean when hot.