APL BSM BB

APPEAL Tap Range Appeal Bath Shower Mixer Brushed Brass



Specification				
Product Type:	Bathroom Taps			
Main Construction Material:	Brass			
Mount Type:	Deck			
Handle Type:	Paddle Lever			
Connection Inlet:	3/4" BSP			
Connection Outlet:	Housed M24 Aerator			
Number of Tap Holes:	2			
Valve/Cartridge Type:	3/4" Short Stem Ceramic Disc Valve			
Plumbing System Requirements:	Suitable for all plumbing systems			
Minimum Dynamic Pressure (bar):	0.3 bar			
Maximum Dynamic Pressure (bar):	5 bar			
Maximum Hot Water Temperature °C:	60°C			
Maximum Static Pressure (bar):	10 bar			
Flow Type:	Single			
Isolation Included:	No			

Features:

- Long life 1/4 turn ceramic disc valves for added durability and smooth control.
- Robust metal fixing nut to secure the tap in place reducing the risk of loosening over time.
- On-trend brushed brass finish to make a statement in your bathroom.
- Rub clean handset limescale and debris build-up is quickly and easily removed by rubbing a finger or a cloth over the nozzles.
- 10-year parts and 1 year labour guarantee for peace of mind.
- Also available in chrome and black
- Co-ordinating Bathroom taps available.

Product Certifications:






Kiwa Certification No: 2312719 Kiwa Expiry Date: 11/12/2028

WRAS Certification No: 2312357 WRAS Expiry Date: 31/12/2028





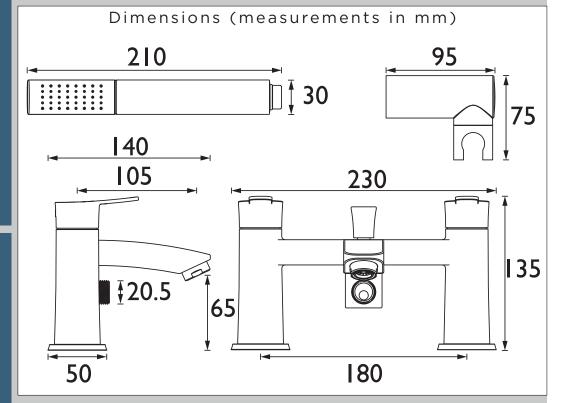

Flow Rates (I/min)								
System Pressure (bar)	0.3	0.5	1	2	3	5		
Through Bath Filler (mixed)	13.7	18.8	27	38	46.5	60		
Through Handset (mixed)	4	5.3	7.7	11.2	13.8	17.3		

TECHNICAL DATA SHEET



