HOU ES BAS BLK

HOURGLASS Tap Range Hourglass Eco Start Basin Mixer Black



Features:

- Eco Start technology saves energy by having cold water as the default central start position of the tap handle. Hot water is only activated when the tap lever is moved from the central position, so your boiler is not unnecessarily fired up.
- This tap has a flow regulator, which limits the flow of water to 5 litres per minute, reducing the amount of water you use.
- Everything you need in the box including flexible tails and clicker/pop-up waste so nothing to buy separately.
- Long life ceramic cartridge for added durability and smooth control.
- Robust metal fixing nut to secure the tap in place reducing the risk of loosening over time.

Product Certifications:




WRAS Certificate No: 2312911 WRAS Expiry Date: 31/12/2028





| Specification | | | | |
|-----------------------------------|-----------------------------------|--|--|--|
| Product Type: | Bathroom Taps | | | |
| Main Construction Material: | Brass | | | |
| Mount Type: | Deck | | | |
| Handle Type: | Lever Handle | | | |
| Connection Inlet: | 1/2" BSP Flexible Tails | | | |
| Connection Outlet: | M24 5lpm Flow Limiter | | | |
| Number of Tap Holes: | 1 | | | |
| Valve/Cartridge Type: | 35mm Eco-Start Cartridge | | | |
| Plumbing System Requirements: | Suitable for all plumbing systems | | | |
| Minimum Dynamic Pressure (bar): | 0.5 bar | | | |
| Maximum Dynamic Pressure (bar): | 5 bar | | | |
| Maximum Hot Water Temperature °C: | 65°C | | | |
| Maximum Static Pressure (bar): | 10 bar | | | |
| Flow Type: | Single | | | |
| Isolation Included: | No | | | |
| | | | | |

Dimensions (measurements in mm)

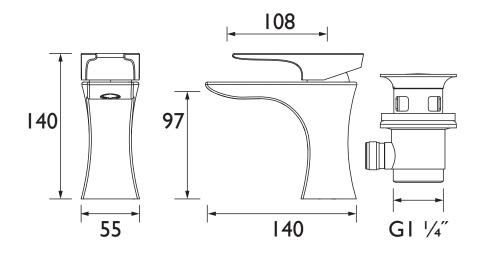

| Flow Rates (I/min) | | | | | | | |
|------------------------|-----|-----|---|---|---|---|--|
| System Pressure (bar) | 0.5 | 0.5 | 1 | 2 | 3 | 5 | |
| HOU ES BAS BLK (mixed) | 5 | 5 | 5 | 5 | 5 | 5 | |

TECHNICAL DATA SHEET





For more products, visit our website: http://www.bristan.com

