

# HOU BF BLK

## HOURGLASS Tap Range Hourglass Bath Filler Tap Black



### Features:

- Long life 1/4 turn ceramic disc valves for added durability and smooth control.
- Robust metal fixing nut to secure the tap in place reducing the risk of loosening over time.
- On-trend matt black finish to make a statement in your bathroom.
- 10 year parts and 1 year labour guarantee for peace of mind.
- Also available in other finishes.

### Product Certifications:



WRAS Certificate No: 250503304  
WRAS Expiry Date: 31/05/2030




For more products, visit our website:  
<http://www.bristan.com>



### Specification

Product Type:	Bathroom Tap
Main Construction Material:	Brass
Mount Type:	Deck Mounted
Handle Type:	Lever Handle
Connection Inlet:	3/4" BSP
Connection Outlet:	M24 Flow Straightener
Number of Tap Holes:	2
Valve/Cartridge Type:	3/4" Ceramic Disc Valve - 1/4 turn
Plumbing System Requirements:	Suitable for all plumbing systems
Minimum Dynamic Pressure (bar):	0.2 bar
Maximum Dynamic Pressure (bar):	5 bar
Maximum Hot Water Temperature °C:	65°C
Maximum Static Pressure (bar):	10 bar
Flow Type:	Single Flow
Isolation Included:	No

### Dimensions (measurements in mm)

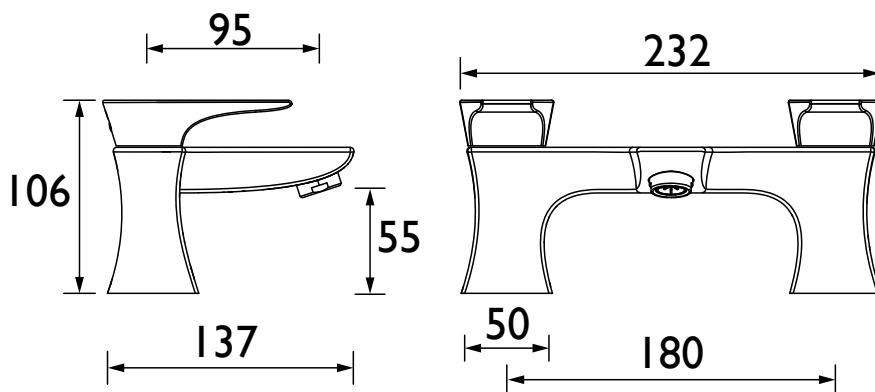

### Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
HOU BF BLK (mixed)	18.3	28.9	40.8	57.7	70.7	91.3

TECHNICAL  
DATA  
SHEET



**BRISTAN**

D7

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Web Site: [www.bristan.com](http://www.bristan.com) Telephone: 0330 026 6273. Email: [enquire@bristan.com](mailto:enquire@bristan.com).

\* - 10 year guarantee applies to products purchased on or after 01/04/2021. Non-chrome product finishes carry a 3 year guarantee on finish. See [www.bristan.com/guarantees](http://www.bristan.com/guarantees) for more information. The information contained on this page was correct at date of issue. Listed flow rates are indicative for the product. Different plumbing systems and flow regulators can produce higher or lower results. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances.

Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.